



Wireless Device Server

- ▶ Enables access to remote devices while minimizing costly cabling
- ▶ Provides network mobility for untethered communication
- ▶ Industry standard 802.11b/g wireless interface
- ▶ Transparent communications - no need to develop special software
- ▶ Two DB9 DTE serial ports supporting RS-232, RS-422 or RS-485 communication
- ▶ Bulletproof wireless security with IEEE 802.11i-PSK, WPA-PSK, TKIP
- ▶ 256-bit AES – end-to-end encryption
- ▶ Ethernet or wireless communication
- ▶ Features TruPort® Com port control technology



Wirelessly Connect, Monitor, Manage and Control Devices Over a Network or the Internet

WiBox® dual-port device servers enable you to connect equipment to 802.11b/g wireless networks via serial or Ethernet, quickly and easily. By merging wireless communications and Lantronix device server technology, WiBox simplifies connectivity to devices in applications where mobility is required or cabling is impractical.

Lantronix's innovative approach to network-enabling devices is transparent to your attached devices and software. You won't need to change the way you work, and there's no need to develop special software to take advantage of wireless networking capabilities. The WiBox simply becomes a conduit between you and your device over your network or the Internet.

The flexibility and power of WiBox offers a huge cost-saving potential for a variety of commercial applications. Serial RS-232/422/485 flexibility, Advanced security, robust data handling capabilities and high serial speeds are all built in. Using a method called serial tunneling, the WiBox encapsulates serial data into packets and transports it over 802.11b/g wireless networks. By connecting two WiBox units via a network, virtual serial connections can be extended across your facility or around the world.

The Com Port Redirector™ software included with your WiBox simplifies your integration process by extending the functionality of your COM port-based Windows® applications. With virtual COM ports mapped to remote device servers on the network, you can replace direct serial connections.

To enable access to a local network or the Internet, the WiBox integrates a fully developed TCP/IP network stack and OS. It even includes a built-in web server, which can be used for configuration or to display operating and troubleshooting information on the attached links to online support.

The DeviceInstaller™ configuration software that's included simplifies installation and setup. WiBox can be set up locally through its serial port, or remotely over a network using DeviceInstaller Telnet or a web browser. Flash memory provides maintenance-free, non-volatile storage of web pages, and allows future system software upgrades.

In modem emulation mode, WiBox is used to replace dial-up modems. The unit accepts modem AT commands on the serial port, then establishes a network connection to the end device, leveraging wireless mobility and bandwidth to eliminate dedicated modems and phone lines.

If you're looking for a transparent, cost-effective and scalable means to network-enable your serial devices, look no further than WiBox from Lantronix.

Total Com Port Control with TruPort Technology

Built into the included Com Port Redirector software, TruPort® technology enables Windows-based applications to access and control serial ports on the WiBox as if they were actually local PC serial ports. The application can monitor and set hardware pins on the WiBox serial ports as well as access serial buffers for total Com port control. This allows existing applications to seamlessly transition from controlling local devices to true remote monitoring and control of devices around the world.



Features

Serial Interface – 2 DB9 DTE serial ports
 Serial Port 1: RS-232
 Serial Port 2: RS-232/422/485 software selectable
 Data Rates: 300 to 921,600 bps
 Characters: 7 or 8 data bits
 Parity: Odd, even, none
 Stop Bits: 1 or 2
 Control Signals: RTS, CTS, DSR, DTR, DCD
 Flow Control: XON/XOFF, RTS/CTS
 ESD Protection: 4kv direct per port

Security
 IEEE 802.11i - PSK with AES-CCMP Encryption
 WPA - PSK
 TKIP Encryption
 128-256 Bit Rijndael AES Encryption, NIST AES FIPS-197 CERT#120
 64/128-bit WEP

Network Interface
 WBX2100E - 802.11b/g
 Connector: Antenna (RP-SMA)
 Standards: WPA, WEP, ARP, UDP/IP, TCP/IP, ICMP, SNMP, AutoIP, DHCP, TFTP, Telnet and HTTP
 1 RJ45
 10/100 Ethernet

Indicators (LED)
 Power
 Ethernet Link
 Wireless Link
 Serial 1
 Serial 2

Processor
 CPU: DSTni-EX (enhanced 80186, 88 MHz)
 Memory: 256 Kbytes SRAM, 512 Kbytes flash

Management
 Lantronix DeviceInstaller GUI, Serial login, SNMP, Telnet login, HTTP
 Security: WEP, WPA, TKIP

Power
 Input: 9-30 VDC
 Consumption: 2 W max.
 AC adapter included (see ordering information below)

Environmental
 Operating temperature range: -40° to 70°C
 Operating humidity: 0 to 95%, non-condensing
 Storage temperature range: -40° to 85°C

Device Packaging
 Material: metal case with flange mount
 Dimensions (LxWxH): 94 x 72 x 23 mm (3.7 x 2.8 x .9 in)
 Weight: 0.4 kg (0.9 lbs)



Agency Approvals
 FCC-B, C/UL, CSA, CE, TUV, CTick, Japanese Radio Certification (Type Certification of Specified Radio Equipment)

Warranty
 2-year limited warranty

Shipping Dimensions
 Dimensions (LxWxH): 9.5 x 7.2 x 13.97 cm (3.7 x 2.8 x 5.5 in.)
 Weight: 1.5 kg (3.0 lbs.)

Included Software and Documentation
 Windows® 98/ME/NT/2000/XP-based configuration software, Com Port Redirector software, related utilities, Quick Start Guide.

Example Configurations

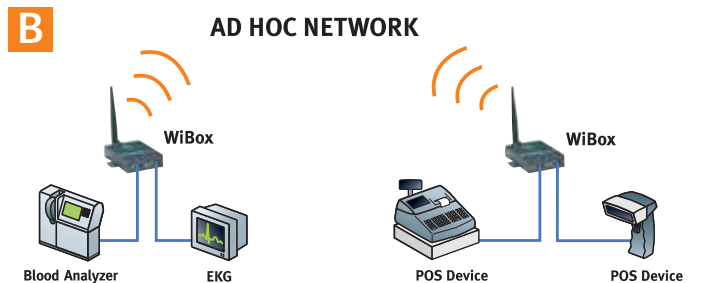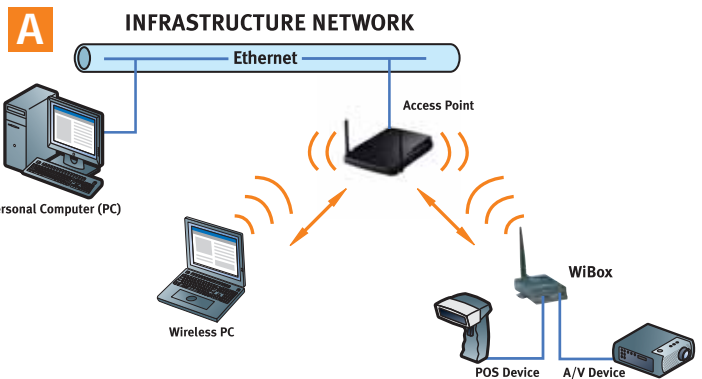

WiBox2100E Back Panel



WiBox2100E Front Panel



Ordering Information

| Part Number | Description |
|--------------|---|
| WB2100EG1-01 | WBX2100E 802.11b/g with 10/100 Ethernet, 115Vac, 50/60 HZ power adapter |
| WB2100EG2-01 | WBX2100E 802.11b/g with 10/100 Ethernet, 100-240Vac, 50/60 HZ International power adapter |
| WB2100EG0-01 | WBX2100E 802.11b/g with 10/100 Ethernet, no power supply |
| WB2100EGB-01 | WBX2100E 802.11b/g with 10/100 Ethernet, Board only |
| ACDIN2001-01 | DIN-rail mount |
| 500-164 | DB9F to DB9F null modem serial cable |



15353 Barranca Parkway | Irvine | CA 92618 | USA | Tel: 800.422.7055 | Fax: 949.450.7232 | www.lantronix.com

©2007, Lantronix, Inc. Lantronix, TruPort and WiBox are registered trademarks, and Secure Com Port Redirector and DeviceInstaller are trademarks of Lantronix, Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice. All rights reserved. 910-450 10/07 DGS2500



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.