



Features

- Advanced Process Technology
- Ultra Low On-Resistance
- Logic Level Gate Drive
- 175°C Operating Temperature
- Fast Switching
- Repetitive Avalanche Allowed up to Tjmax
- Lead-Free, RoHS Compliant
- Automotive Qualified *



HEXFET® Power MOSFET

| | |
|--|------------------|
| V_{DSS} | 100V |
| R_{DS(on)} | typ. 11mΩ |
| | max. 14mΩ |
| I_D (Silicon Limited) | 63A⑨ |
| I_D (Package Limited) | 42A |

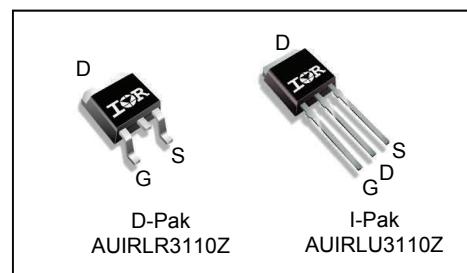
Description

Specifically designed for Automotive applications, this HEXFET® Power MOSFET utilizes the latest processing techniques to achieve extremely low on-resistance per silicon area. Additional features of this design are a 175°C junction operating temperature, fast switching speed and improved repetitive avalanche rating. These features combine to make this design an extremely efficient and reliable device for use in Automotive applications and a wide variety of other applications.

| Base part number | Package Type | Standard Pack | | Orderable Part Number |
|------------------|--------------|--------------------|----------|-----------------------|
| | | Form | Quantity | |
| AUIRLU3110Z | I-Pak | Tube | 75 | AUIRLU3110Z |
| AUIRLR3110Z | D-Pak | Tube | 75 | AUIRLR3110Z |
| | | Tape and Reel Left | 3000 | AUIRLR3110ZTRL |

Absolute Maximum Ratings

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; and functional operation of the device at these or any other condition beyond those indicated in the specifications is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions. Ambient temperature (TA) is 25°C, unless otherwise specified.

| Symbol | Parameter | Max. | Units |
|---|---|-------------------------|-------|
| I _D @ T _C = 25°C | Continuous Drain Current, V _{GS} @ 10V (Silicon Limited) | 63⑨ | A |
| I _D @ T _C = 100°C | Continuous Drain Current, V _{GS} @ 10V (Silicon Limited) | 45⑨ | |
| I _D @ T _C = 25°C | Continuous Drain Current, V _{GS} @ 10V (Package Limited) | 42 | |
| I _{DM} | Pulsed Drain Current ① | 250 | |
| P _D @ T _C = 25°C | Maximum Power Dissipation | 140 | W |
| | Linear Derating Factor | 0.95 | W/°C |
| V _{GS} | Gate-to-Source Voltage | ± 16 | V |
| E _{AS} | Single Pulse Avalanche Energy (Thermally Limited) ② | 110 | mJ |
| E _{AS} (Tested) | Single Pulse Avalanche Energy Tested Value ⑥ | 140 | |
| I _{AR} | Avalanche Current ① | See Fig.15,16, 12a, 12b | |
| E _{AR} | Repetitive Avalanche Energy ⑤ | mJ | |
| T _J | Operating Junction and | -55 to + 175 | °C |
| T _{STG} | Storage Temperature Range | | |
| | Soldering Temperature, for 10 seconds (1.6mm from case) | 300 | |

Thermal Resistance

| Symbol | Parameter | Typ. | Max. | Units |
|------------------|-----------------------------------|------|------|-------|
| R _{θJC} | Junction-to-Case | — | 1.05 | °C/W |
| R _{θJA} | Junction-to-Ambient (PCB Mount) ⑦ | — | 50 | |
| R _{θJA} | Junction-to-Ambient | — | 110 | |


HEXFET® is a registered trademark of Infineon.

 *Qualification standards can be found at www.infineon.com


Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|---|--------------------------------------|------|-------|------|---------------------|---|
| $V_{(\text{BR})\text{DSS}}$ | Drain-to-Source Breakdown Voltage | 100 | — | — | V | $V_{GS} = 0V, I_D = 250\mu\text{A}$ |
| $\Delta V_{(\text{BR})\text{DSS}}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient | — | 0.077 | — | V/ $^\circ\text{C}$ | Reference to $25^\circ\text{C}, I_D = 1\text{mA}$ |
| $R_{DS(\text{on})}$ | Static Drain-to-Source On-Resistance | — | 11 | 14 | $\text{m}\Omega$ | $V_{GS} = 10\text{V}, I_D = 38\text{A}$ ③ |
| | | — | 12 | 16 | | $V_{GS} = 4.5\text{V}, I_D = 32\text{A}$ ③ |
| $V_{GS(\text{th})}$ | Gate Threshold Voltage | 1.0 | — | 2.5 | V | $V_{DS} = V_{GS}, I_D = 100\mu\text{A}$ |
| g_{fs} | Forward Trans conductance | 52 | — | — | S | $V_{DS} = 25\text{V}, I_D = 38\text{A}$ |
| I_{DSS} | Drain-to-Source Leakage Current | — | — | 20 | μA | $V_{DS} = 100\text{V}, V_{GS} = 0\text{V}$ |
| | | — | — | 250 | | $V_{DS} = 100\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$ |
| I_{GSS} | Gate-to-Source Forward Leakage | — | — | 200 | nA | $V_{GS} = 16\text{V}$ |
| | Gate-to-Source Reverse Leakage | — | — | -200 | | $V_{GS} = -16\text{V}$ |

Dynamic Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)





| | | | | | | |
|-----------------|------------------------------|---|------|----|----|---|
| Q_g | Total Gate Charge | — | 34 | 48 | nC | $I_D = 38\text{A}$ $V_{DS} = 50\text{V}$ $V_{GS} = 4.5\text{V}$ ③ |
| Q_{gs} | Gate-to-Source Charge | — | 10 | — | | |
| Q_{qd} | Gate-to-Drain Charge | — | 15 | — | | |
| $t_{d(on)}$ | Turn-On Delay Time | — | 24 | — | ns | $V_{DD} = 50\text{V}$ $I_D = 38\text{A}$ |
| t_r | Rise Time | — | 110 | — | | $R_G = 3.7\Omega$ |
| $t_{d(off)}$ | Turn-Off Delay Time | — | 33 | — | | $V_{GS} = 4.5\text{V}$ ③ |
| t_f | Fall Time | — | 48 | — | | |
| L_D | Internal Drain Inductance | — | 4.5 | — | nH | Between lead, 6mm (0.25in.) from package and center of die contact |
| L_s | Internal Source Inductance | — | 7.5 | — | |  |
| C_{iss} | Input Capacitance | — | 3980 | — | pF | $V_{GS} = 0\text{V}$ |
| C_{oss} | Output Capacitance | — | 310 | — | | $V_{DS} = 25\text{V}$ |
| C_{rss} | Reverse Transfer Capacitance | — | 130 | — | | $f = 1.0\text{MHz}$ |
| C_{oss} | Output Capacitance | — | 1820 | — | | $V_{GS} = 0\text{V}, V_{DS} = 1.0\text{V}$ $f = 1.0\text{MHz}$ |
| C_{oss} | Output Capacitance | — | 170 | — | | $V_{GS} = 0\text{V}, V_{DS} = 80\text{V}$ $f = 1.0\text{MHz}$ |
| $C_{oss\ eff.}$ | Effective Output Capacitance | — | 320 | — | | $V_{GS} = 0\text{V}, V_{DS} = 0\text{V to } 80\text{V}$ ④ |

Diode Characteristics

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|----------|---|---|------|------|-------|---|
| I_s | Continuous Source Current (Body Diode) | — | — | 63 | A | MOSFET symbol showing the integral reverse p-n junction diode. |
| I_{SM} | Pulsed Source Current (Body Diode) ① | — | — | 250 | |  |
| V_{SD} | Diode Forward Voltage | — | — | 1.3 | V | $T_J = 25^\circ\text{C}, I_s = 38\text{A}, V_{GS} = 0\text{V}$ ③ |
| t_{rr} | Reverse Recovery Time | — | 34 | 51 | ns | $T_J = 25^\circ\text{C}, I_F = 38\text{A}, V_{DD} = 50\text{V}$ |
| Q_{rr} | Reverse Recovery Charge | — | 42 | 63 | nC | $dI/dt = 100\text{A}/\mu\text{s}$ ③ |
| t_{on} | Forward Turn-On Time | Intrinsic turn-on time is negligible (turn-on is dominated by $L_s + L_D$) | | | | |

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)
- ② Limited by $T_{J\max}$, starting $T_J = 25^\circ\text{C}$, $L = 0.16\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 38\text{A}$, $V_{GS} = 10\text{V}$. Part not recommended for use above this value.
- ③ Pulse width $\leq 1.0\text{ms}$; duty cycle $\leq 2\%$.
- ④ $C_{oss\ eff.}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% V_{DSS}
- ⑤ Limited by $T_{J\max}$, see Fig.12a, 12b, 15, 16 for typical repetitive avalanche performance.
- ⑥ This value determined from sample failure population. 100% tested to this value in production.
- ⑦ When mounted on 1" square PCB (FR-4 or G-10 Material). For recommended footprint and soldering techniques refer to application note #AN-994 .
- ⑧ R_o is measured at T_J approximately 90°C
- ⑨ Calculated continuous current based on maximum allowable junction temperature. Bond wire current limit is 42A. Note that current limitations arising from heating of the device leads may occur with some lead mounting arrangements.

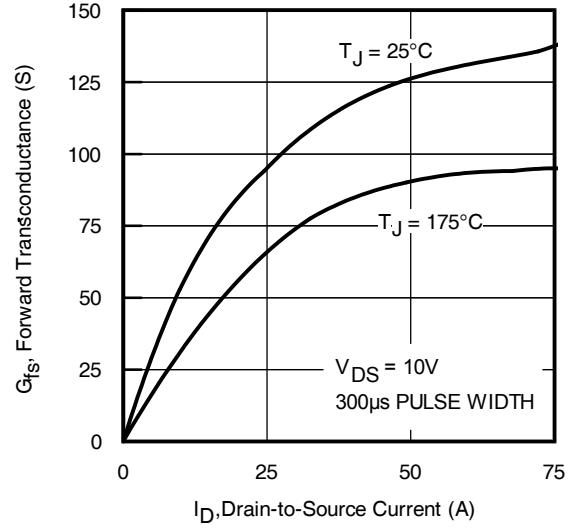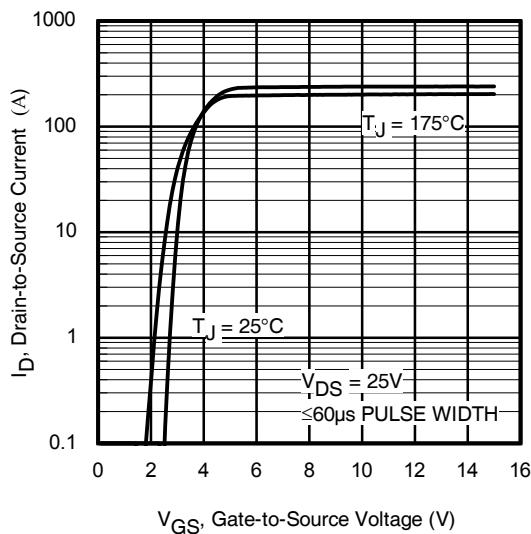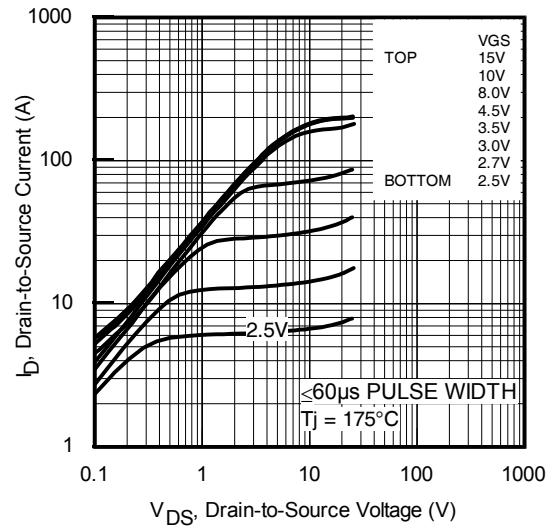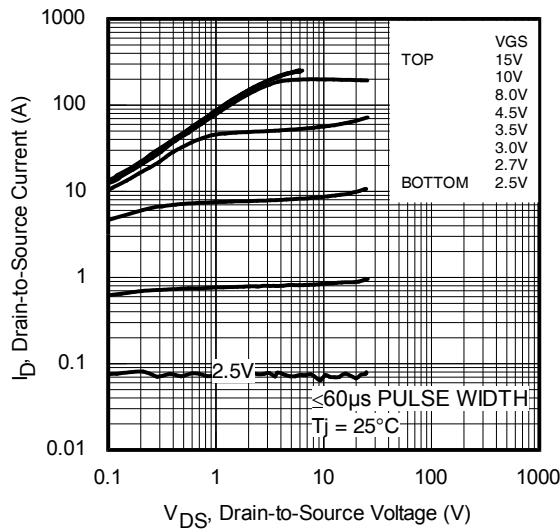

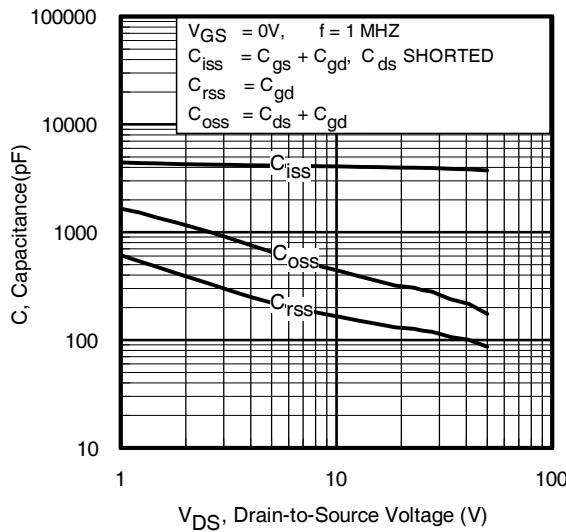


Fig 5. Typical Capacitance vs.
Drain-to-Source Voltage

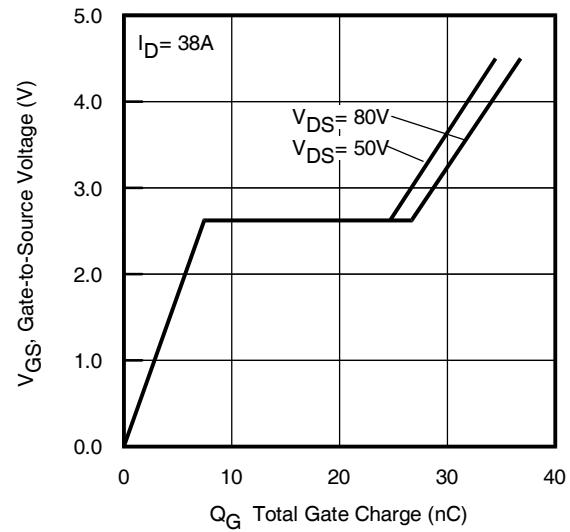


Fig 6. Typical Gate Charge vs.
Gate-to-Source Voltage

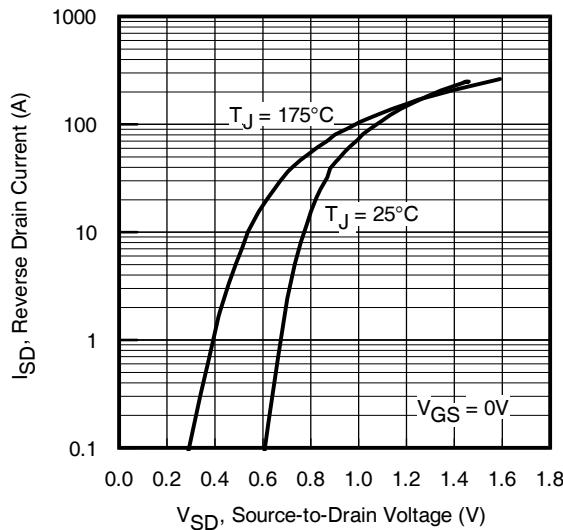


Fig. 7 Typical Source-to-Drain Diode
Forward Voltage

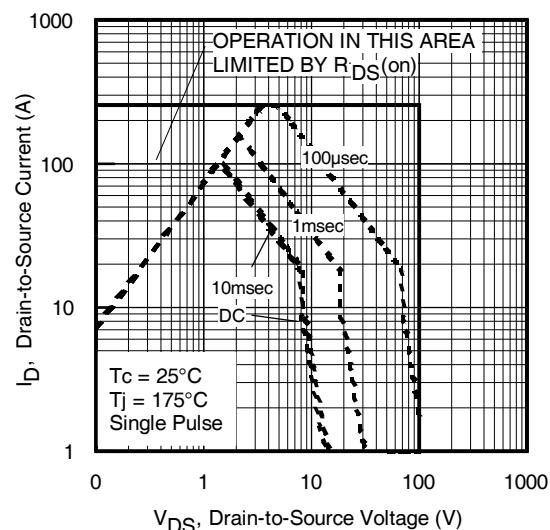


Fig 8. Maximum Safe Operating Area

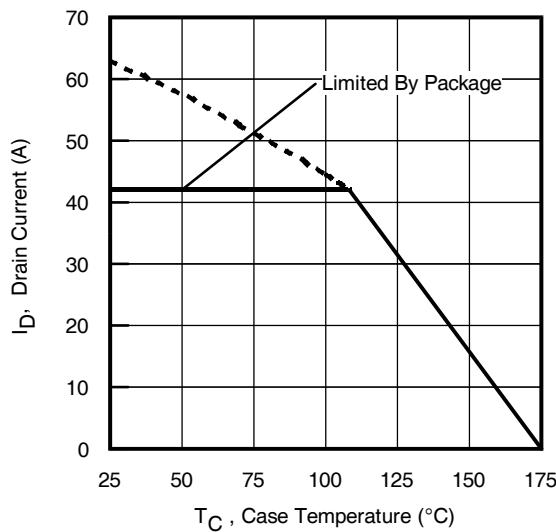


Fig 9. Maximum Drain Current Vs. Case Temperature

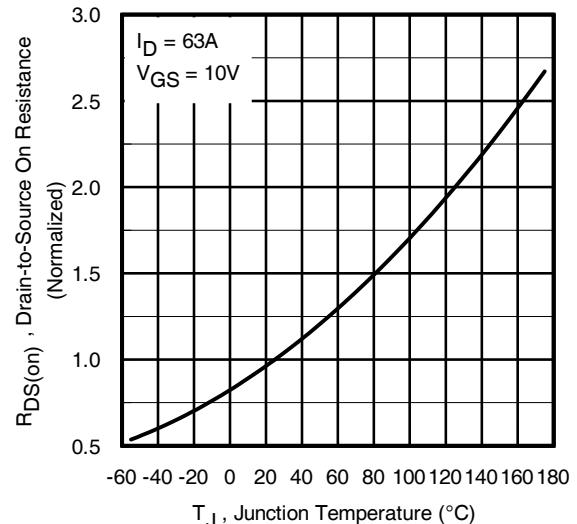


Fig 10. Normalized On-Resistance Vs. Temperature

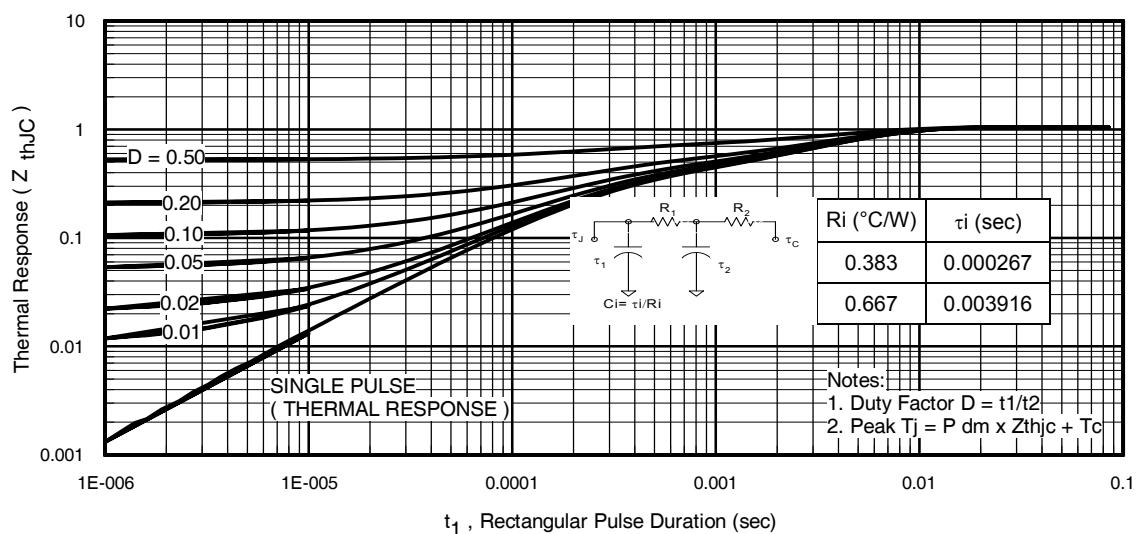


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

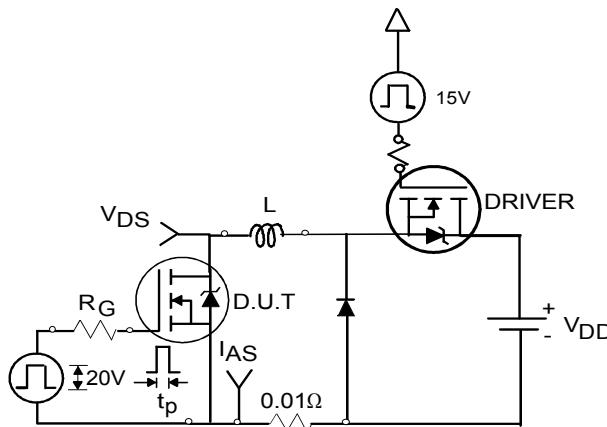


Fig 12a. Unclamped Inductive Test Circuit

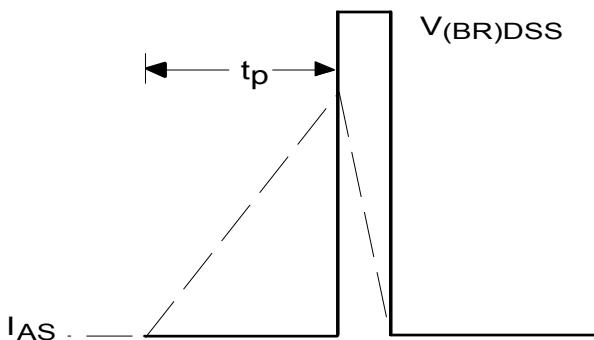


Fig 12b. Unclamped Inductive Waveforms

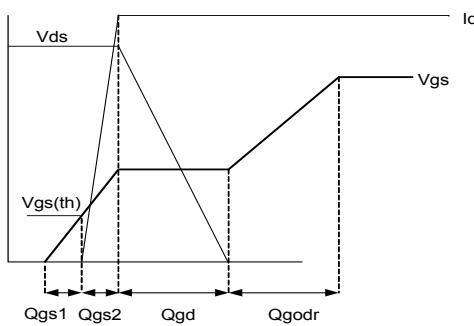


Fig 13a. Gate Charge Waveform

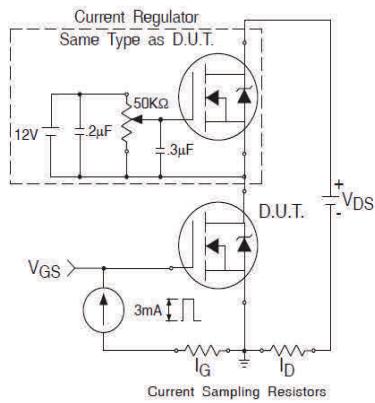


Fig 13b. Gate Charge Test Circuit

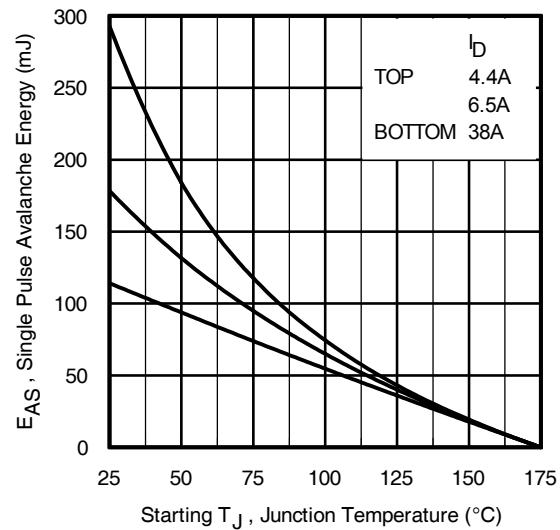


Fig 12c. Maximum Avalanche Energy vs. Drain Current

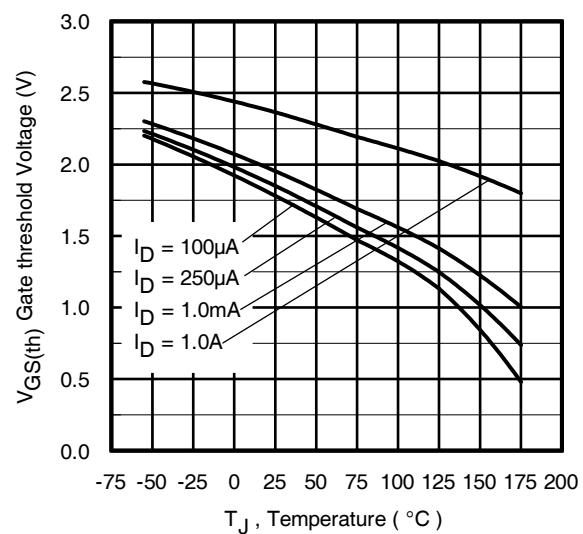


Fig 14. Threshold Voltage Vs. Temperature

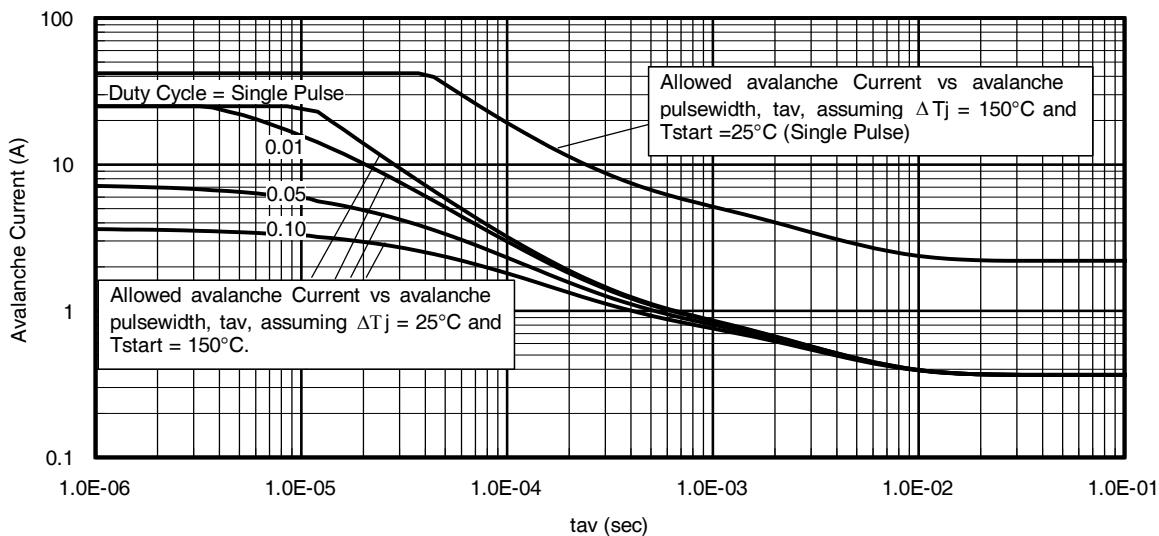


Fig 15. Typical Avalanche Current Vs. Pulse width

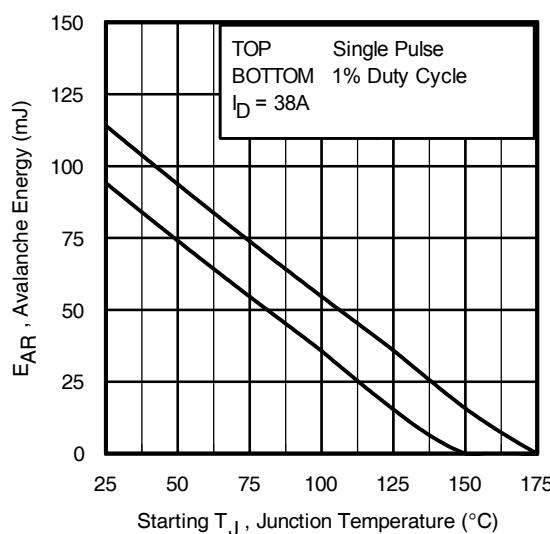


Fig 16. Maximum Avalanche Energy Vs. Temperature

Notes on Repetitive Avalanche Curves , Figures 15, 16:

(For further info, see AN-1005 at www.infineon.com)

1. Avalanche failures assumption:
Purely a thermal phenomenon and failure occurs at a temperature far in excess of T_{jmax} . This is validated for every part type.
 2. Safe operation in Avalanche is allowed as long as T_{jmax} is not exceeded.
 3. Equation below based on circuit and waveforms shown in Figures 12a, 12b.
 4. $P_{D(ave)}$ = Average power dissipation per single avalanche pulse.
 5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
 6. I_{av} = Allowable avalanche current.
 7. ΔT = Allowable rise in junction temperature, not to exceed T_{jmax} (assumed as 25°C in Figure 15, 16).
- tav = Average time in avalanche.
 D = Duty cycle in avalanche = $t_{av} \cdot f$
 $Z_{thJC}(D, tav)$ = Transient thermal resistance, see Figures 13)

$$P_{D(ave)} = 1/2 (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$

$$E_{AS(AR)} = P_{D(ave)} \cdot t_{av}$$

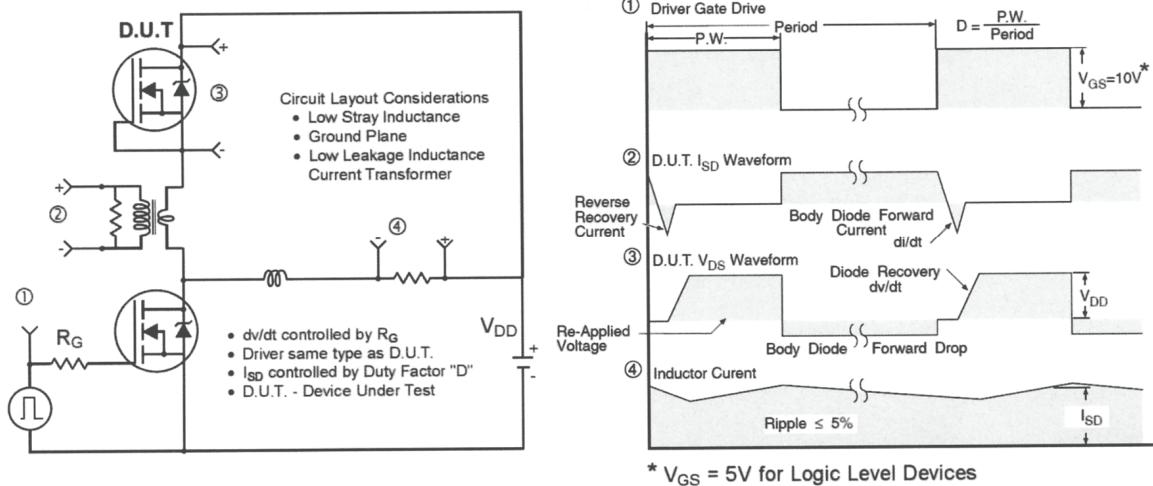


Fig 17. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

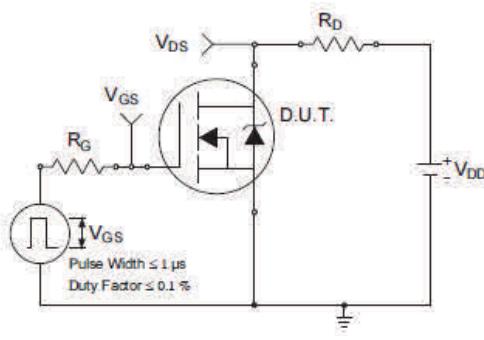


Fig 18a. Switching Time Test Circuit

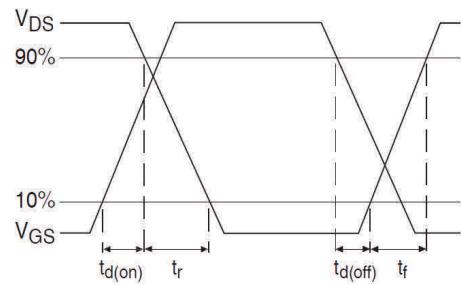
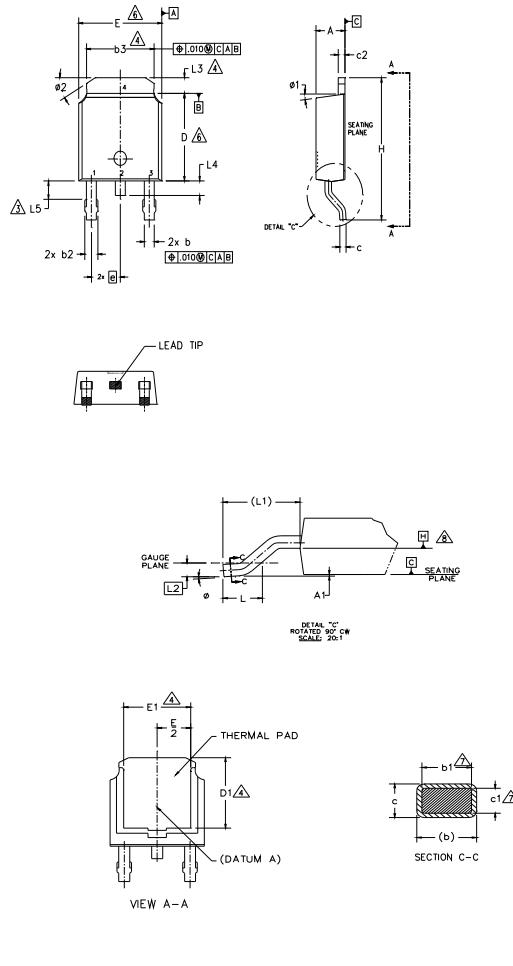


Fig 18b. Switching Time Waveforms

D-Pak (TO-252AA) Package Outline (Dimensions are shown in millimeters (inches))

NOTES:

- 1.- DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994
- 2.- DIMENSION ARE SHOWN IN INCHES [MILLIMETERS].
- 3.- LEAD DIMENSION UNCONTROLLED IN L5.
- 4.- DIMENSION D1, E1, L3 & b3 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.
- 5.- SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .005 AND 0.10 [0.13 AND 0.25] FROM THE LEAD TIP.
- 6.- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .005 [0.13] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.
- 7.- DIMENSION b1 & c1 APPLIED TO BASE METAL ONLY.
- 8.- DATUM A & B TO BE DETERMINED AT DATUM PLANE H.
- 9.- OUTLINE CONFORMS TO JEDEC OUTLINE TO-252AA.


| S Y M B O L | DIMENSIONS | | | | N O T E S | |
|----------------------------|-------------|-------|--------|------|-----------------------|--|
| | MILLIMETERS | | INCHES | | | |
| | MIN. | MAX. | MIN. | MAX. | | |
| A | 2.18 | 2.39 | .086 | .094 | | |
| A1 | — | 0.13 | — | .005 | | |
| b | 0.64 | 0.89 | .025 | .035 | | |
| b1 | 0.65 | 0.79 | .025 | .031 | 7 | |
| b2 | 0.76 | 1.14 | .030 | .045 | | |
| b3 | 4.95 | 5.46 | .195 | .215 | 4 | |
| c | 0.46 | 0.61 | .018 | .024 | | |
| c1 | 0.41 | 0.56 | .016 | .022 | 7 | |
| c2 | 0.46 | 0.89 | .018 | .035 | | |
| D | 5.97 | 6.22 | .235 | .245 | 6 | |
| D1 | 5.21 | — | .205 | — | 4 | |
| E | 6.35 | 6.73 | .250 | .265 | 6 | |
| E1 | 4.32 | — | .170 | — | 4 | |
| e | 2.29 | BSC | .090 | BSC | | |
| H | 9.40 | 10.41 | .370 | .410 | | |
| L | 1.40 | 1.78 | .055 | .070 | | |
| L1 | 2.74 | BSC | .108 | REF. | | |
| L2 | 0.51 | BSC | .020 | BSC | | |
| L3 | 0.89 | 1.27 | .035 | .050 | 4 | |
| L4 | — | 1.02 | — | .040 | | |
| L5 | 1.14 | 1.52 | .045 | .060 | 3 | |
| Ø | 0° | 10° | 0° | 10° | | |
| Ø1 | 0° | 15° | 0° | 15° | | |
| Ø2 | 25° | 35° | 25° | 35° | | |

LEAD ASSIGNMENTSHEXFET

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN


IGBT & CoPAK

- 1.- GATE
- 2.- COLLECTOR
- 3.- Emitter
- 4.- COLLECTOR

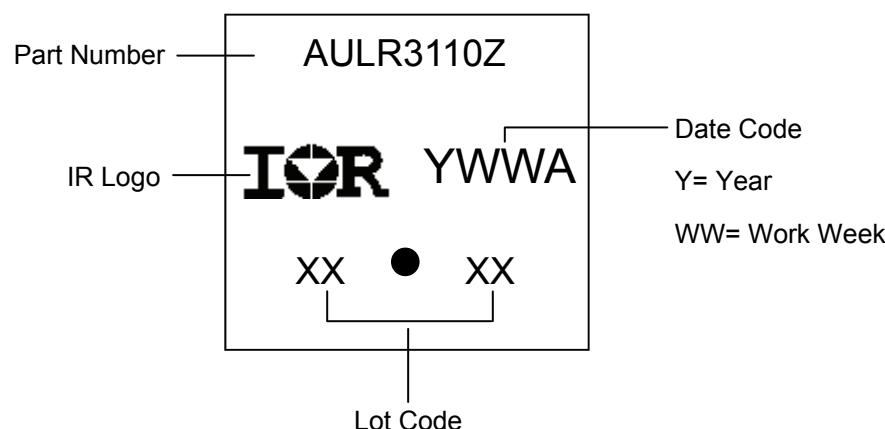D-Pak (TO-252AA) Part Marking Information

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

I-Pak (TO-251AA) Package Outline (Dimensions are shown in millimeters (inches))

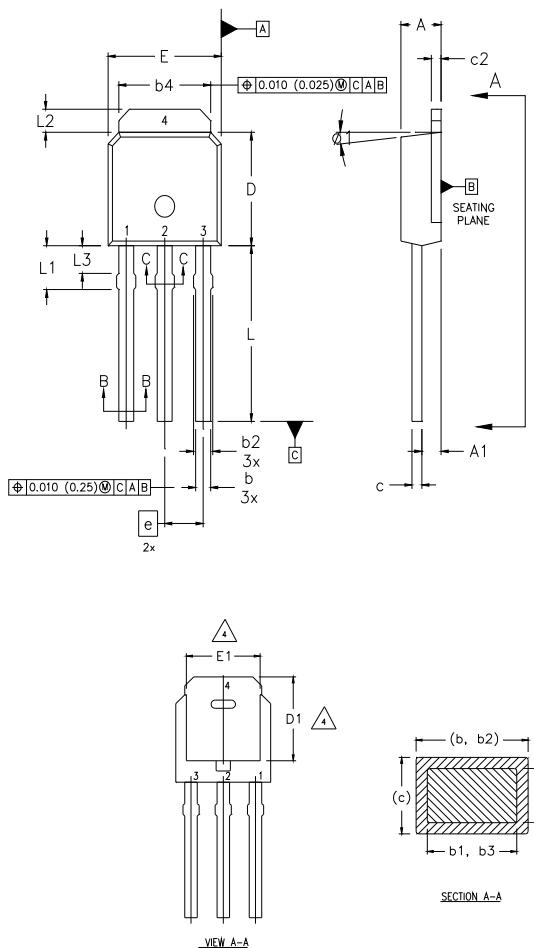

NOTES:


- 1 DIMENSIONING AND TOLERANCING PER ASME Y14.5 M- 1994.
- 2 DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
- 3 DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- 4 THERMAL PAD CONTOUR OPTION WITHIN DIMENSION b4, L2, E1 & D1.
- 5 LEAD DIMENSION UNCONTROLLED IN L3.
- 6 DIMENSION b1, b3 APPLY TO BASE METAL ONLY.
- 7 OUTLINE CONFORMS TO JEDEC OUTLINE TO-251AA.
- 8 CONTROLLING DIMENSION : INCHES.

LEAD ASSIGNMENTSHEXFET


- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE
- 4.- DRAIN

| SYMBOL | DIMENSIONS | | | | NOTES | |
|--------|-------------|------|-----------|-------|-------|--|
| | MILLIMETERS | | INCHES | | | |
| | MIN. | MAX. | MIN. | MAX. | | |
| A | 2.18 | 2.39 | 0.086 | .094 | | |
| A1 | 0.89 | 1.14 | 0.035 | 0.045 | | |
| b | 0.64 | 0.89 | 0.025 | 0.035 | | |
| b1 | 0.64 | 0.79 | 0.025 | 0.031 | 4 | |
| b2 | 0.76 | 1.14 | 0.030 | 0.045 | | |
| b3 | 0.76 | 1.04 | 0.030 | 0.041 | | |
| b4 | 5.00 | 5.46 | 0.195 | 0.215 | 4 | |
| c | 0.46 | 0.61 | 0.018 | 0.024 | | |
| c1 | 0.41 | 0.56 | 0.016 | 0.022 | | |
| c2 | .046 | 0.86 | 0.018 | 0.035 | | |
| D | 5.97 | 6.22 | 0.235 | 0.245 | 3, 4 | |
| D1 | 5.21 | — | 0.205 | — | 4 | |
| E | 6.35 | 6.73 | 0.250 | 0.265 | 3, 4 | |
| E1 | 4.32 | — | 0.170 | — | 4 | |
| e | 2.29 | | 0.090 BSC | | | |
| L | 8.89 | 9.60 | 0.350 | 0.380 | | |
| L1 | 1.91 | 2.29 | 0.075 | 0.090 | | |
| L2 | 0.89 | 1.27 | 0.035 | 0.050 | 4 | |
| L3 | 1.14 | 1.52 | 0.045 | 0.060 | 5 | |
| ø1 | 0° | 15° | 0° | 15° | | |


I-Pak (TO-251AA) Part Marking Information

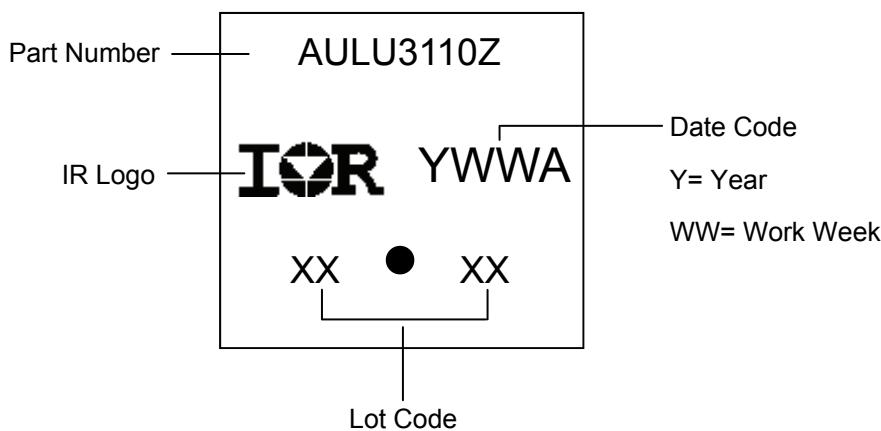

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

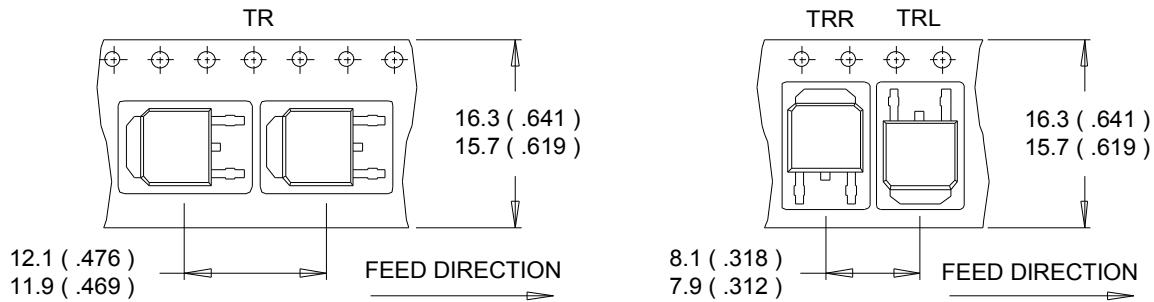D-Pak (TO-252AA) Tape & Reel Information (Dimensions are shown in millimeters (inches))**NOTES :**

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

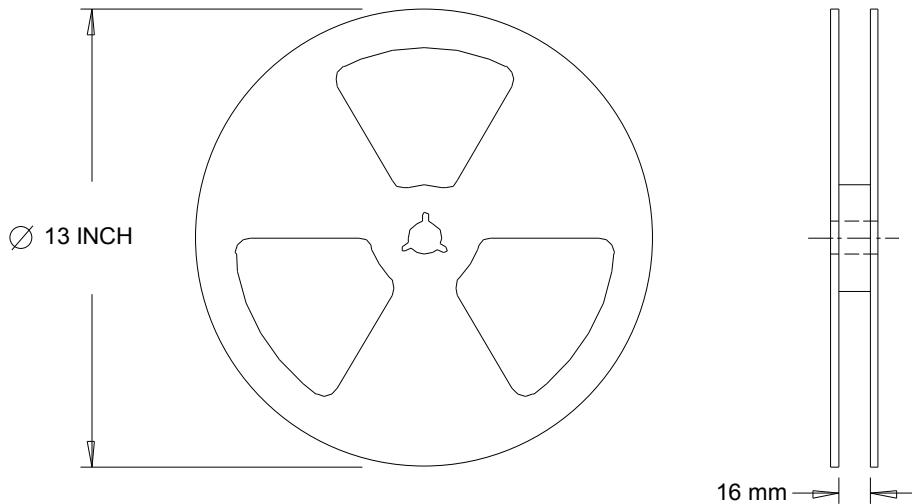**NOTES :**

1. OUTLINE CONFORMS TO EIA-481.

Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

Qualification Information

| | | | | |
|-----------------------------------|----------------------|---|------|--|
| | | Automotive (per AEC-Q101) | | |
| Qualification Level | | Comments: This part number(s) passed Automotive qualification. Infineon's Industrial and Consumer qualification level is granted by extension of the higher Automotive level. | | |
| Moisture Sensitivity Level | | D-Pak | MSL1 | |
| ESD | Machine Model | I-Pak Class M4 (+/- 700V) [†] AEC-Q101-002 | | |
| | Human Body Model | Class H1C (+/- 2000V) [†] AEC-Q101-001 | | |
| | Charged Device Model | Class C5 (+/- 2000V) [†] AEC-Q101-005 | | |
| RoHS Compliant | | Yes | | |

[†] Highest passing voltage.

Revision History

| Date | Comments |
|------------|--|
| 2/28/2014 | <ul style="list-style-type: none"> Added "Logic Level Gate Drive" bullet in the features section on page 1 Updated data sheet with new IR corporate template |
| 4/9/2014 | <ul style="list-style-type: none"> Updated package outline on page 9 & page 10 Updated qualification table- I-pak from "N/A" to "MSL1" on page 12 |
| 10/29/2015 | <ul style="list-style-type: none"> Updated datasheet with corporate template Corrected ordering table on page 1. |

Published by

Infineon Technologies AG
81726 München, Germany

© Infineon Technologies AG 2015

All Rights Reserved.

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.