

## Power Resistor for Mounting onto a Heatsink Thick Film Technology

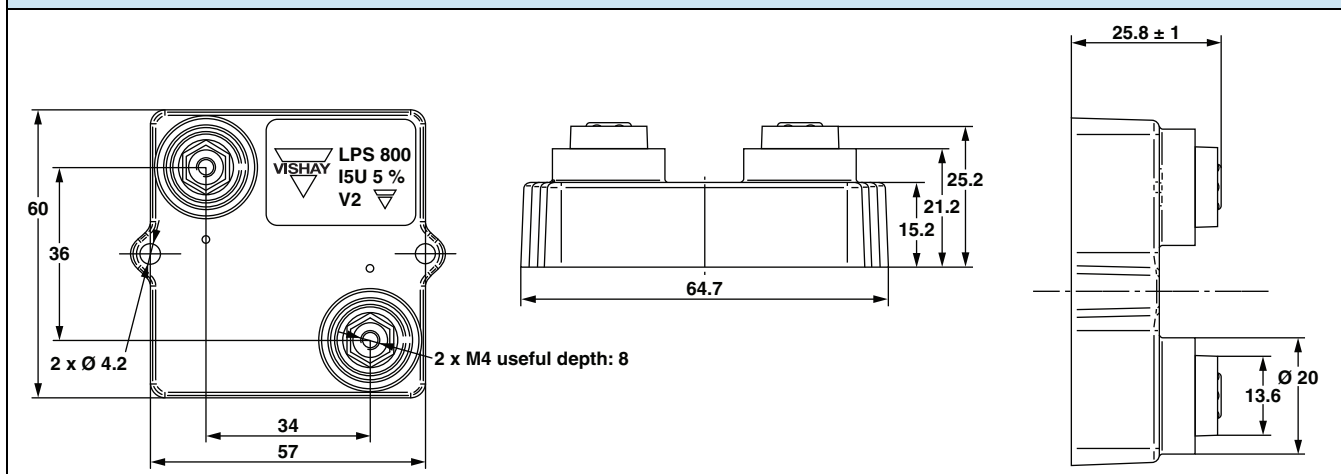


### FEATURES

- 800 W at 85 °C bottom case temperature
- Wide resistance range: 0.3  $\Omega$  to 900 k $\Omega$   
E24 series
- Non inductive
- Easy mounting
- Low thermal radiation of the case
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

### DIMENSIONS in millimeters



#### Note

- Tolerances unless stated:  $\pm 0.2$  mm

### MECHANICAL SPECIFICATIONS

<b>Mechanical Protection</b>	Insulated case UL 94 V-0
<b>Resistive Element</b>	Thick film
<b>Substrate</b>	Alumina
<b>End Connections</b>	Screws M4
<b>Tightening Torque</b>	
- On Connections	2 Nm
- On Heatsink	2 Nm
<b>Maximum Torque</b>	2.5 Nm
<b>Weight</b>	83 g $\pm 10$ %

### ENVIRONMENTAL SPECIFICATIONS

<b>Temperature Range</b>	- 55 °C to 175 °C
<b>Climatic Category</b>	55/175/56

### ELECTRICAL SPECIFICATIONS

<b>Resistance Range</b>	0.3 $\Omega$ to 900 k $\Omega$
<b>Tolerances (Standard)</b>	$\pm 1$ % to $\pm 10$ %
<b>Power Rating and Thermal Resistance</b>	800 W at + 85 °C bottom case temperature $R_{TH(j-c)}$ : 0.112 °C/W
<b>Temperature Coefficient</b>	$R \leq 1 U$ : $\pm 500$ ppm/°C $1 U < R \leq 10 U$ : $\pm 300$ ppm/°C $10 U < R$ : $\pm 150$ ppm/°C
<b>- 55 °C/175 °C IEC 60115-1 Standard</b>	
<b>Limiting Element Voltage <math>U_L</math></b>	5 kV
<b>Dielectric Strength IEC 60115-1, 1 min, 10 mA max.</b>	7 kV <sub>RMS</sub> or 12 kV <sub>RMS</sub>
<b>Insulation Resistance</b>	$\geq 10^4$ M $\Omega$
<b>Inductance</b>	$\leq 0.1$ $\mu$ H
<b>Critical Resistance</b>	31.25 k $\Omega$

PERFORMANCE		
TESTS	CONDITIONS	REQUIREMENTS
Momentary Overload	IEC 60115-1 $1.5 \times P_r / 10 \text{ s}$ $U_{\max.} \leq U_L = 5000 \text{ V}$	$\pm (0.25 \% + 0.05 \Omega)$
Rapid Temperature Change	IEC 60115-1/IEC 60068-2-14 Test Na 50 cycles - 55 °C to + 175 °C	$\pm (0.5 \% + 0.05 \Omega)$
Load Life	IEC 60115-1 1000 h (90/30) $P_r$ at 85 °C	$\pm (0.5 \% + 0.05 \Omega)$
Humidity (Steady State)	IEC 60115-1 56 days RH 95 %/40 °C	$\pm (0.5 \% + 0.05 \Omega)$
Vibration	MIL STD 202 Method 204 Cond. D (10 g; 5/500 Hz)	$\pm (0.25 \% + 0.05 \Omega)$
Climatic Sequence	IEC 60115-1 (55/175/56)	$\pm (1 \% + 0.05 \Omega)$

### RECOMMENDATIONS FOR MOUNTING ONTO A HEATSINK

- Surfaces in contact must be carefully cleaned.
- The heatsink must have an acceptable flatness: From 0.05 mm to 0.1 mm/100 mm.
- Roughness of the heatsink must be around 6.3  $\mu\text{m}$ . In order to improve thermal conductivity, surfaces in contact (alumina, heatsink) should be coated with a silicone grease (type SI 340 from Rhône-Poulenc or Dow 340 from Dow Corning) or a thermal film (type Q Pad II) easier and faster to install than the grease.
- The fastening of the resistor to the heatsink is under pressure control of two screws tightened at 2 Nm for full power availability.

Tightening Torque on Heatsink	LPS 800
	2 Nm

- The following accessories are supplied with each product: 2 screws CHC M4 \* 25 class 8.8 and 2 M4 contact lock washers for heatsink mounting,  
2 screws TH M4 \* 6/6 and 2 M4 contact lock washers for connections.

### CHOICE OF THE HEATSINK

The user must choose the heatsink according to the working conditions of the component (power, room temperature). Maximum working temperature must not exceed 175 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{TH(j-c)} + R_{TH(c-a)}]}$$

P: Expressed in W

$\Delta T$ : Difference between maximum working temperature and room temperature

$R_{TH(j-c)}$ : Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component: (see specifications environmental paragraph).

$R_{TH(c-a)}$ : Thermal resistance value measured between outer side of the resistor and room temperature. It is the thermal resistance of the thermal interface, the heatsink (type, shape) and the quality of the fastening device.

### Example:

$R_{TH(c-a)}$  for LPS 800 power dissipation 180 W at + 50 °C room temperature.

$\Delta T \leq 175 \text{ °C} - 50 \text{ °C} = 125 \text{ °C}$

$R_{TH(j-c)} + R_{TH(c-a)} = \frac{\Delta T}{P} = \frac{125}{180} = 0.69 \text{ °C/W}$

$R_{TH(j-c)} = 0.112 \text{ °C/W}$

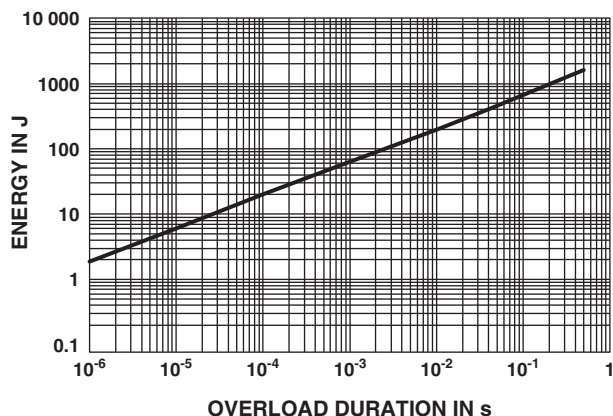
$R_{TH(c-a)} = 0.69 \text{ °C/W} - 0.112 \text{ °C/W} = 0.578 \text{ °C/W}$

**OVERLOADS**

In any case the applied voltage must be lower than  $U_L = 5000$  V.

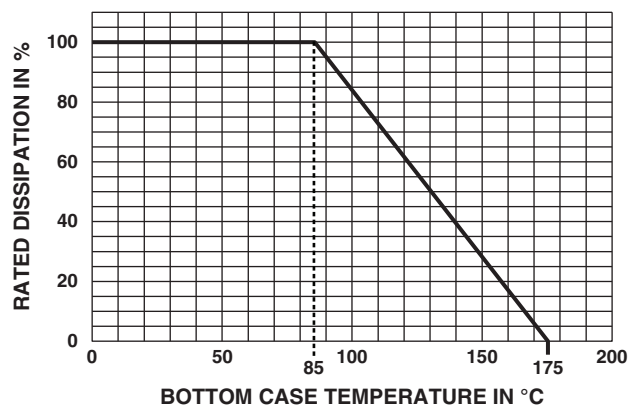
**Short time overload:**  $1.5 \times P_r/10$  s

**Accidental overload:** The values indicated on the following graph are applicable to resistors in air or mounted onto a heatsink.

**ENERGY CURVE****POWER RATING**

The temperature of the case should be maintained within the limits specified in the following figure.

To optimize the thermal conduction, contacting surfaces should be coated with silicone grease or thermal film, and heatsink mounting screws tightened to 2 Nm.

**MARKING**

Series, style, ohmic value (in  $\Omega$ ), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

**PACKAGING**

Box of 15 units

**ORDERING INFORMATION**

LPS	800	100 k $\Omega$	$\pm 1\%$	xxx	BO15	e
MODEL	STYLE	RESISTANCE VALUE	TOLERANCE	CUSTOM DESIGN	PACKAGING	LEAD (Pb)-FREE
			$\pm 1\%$ $\pm 2\%$ $\pm 5\%$ $\pm 10\%$	Optional on request: Special TCR, shape etc.		

**GLOBAL PART NUMBER INFORMATION**

L	P	S	0	8	0	0	H	4	7	R	0	J	B	
GLOBAL MODEL		DIELECTRIC		OHMIC VALUE			TOLERANCE		PACKAGING		SPECIAL			
LPS 800		L = Dielectric strength 7 kV H = Dielectric strength 12 kV		The first three digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point.  48R7 = 48.7 $\Omega$ 47R0 = 47 $\Omega$ 1001 = 1 k $\Omega$ 4R70 = 4.7 $\Omega$ R240 = 0.24 $\Omega$			F = 1 % G = 2 % J = 5 % K = 10 %		B = Box 15 pieces		As applicable ZAx			



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.