


10	9	8	7	6	5	4	3	2	1
PART NUMBER		DESCRIPTION							
180260-0000		CITIZEN L-330 LED HOLDER							

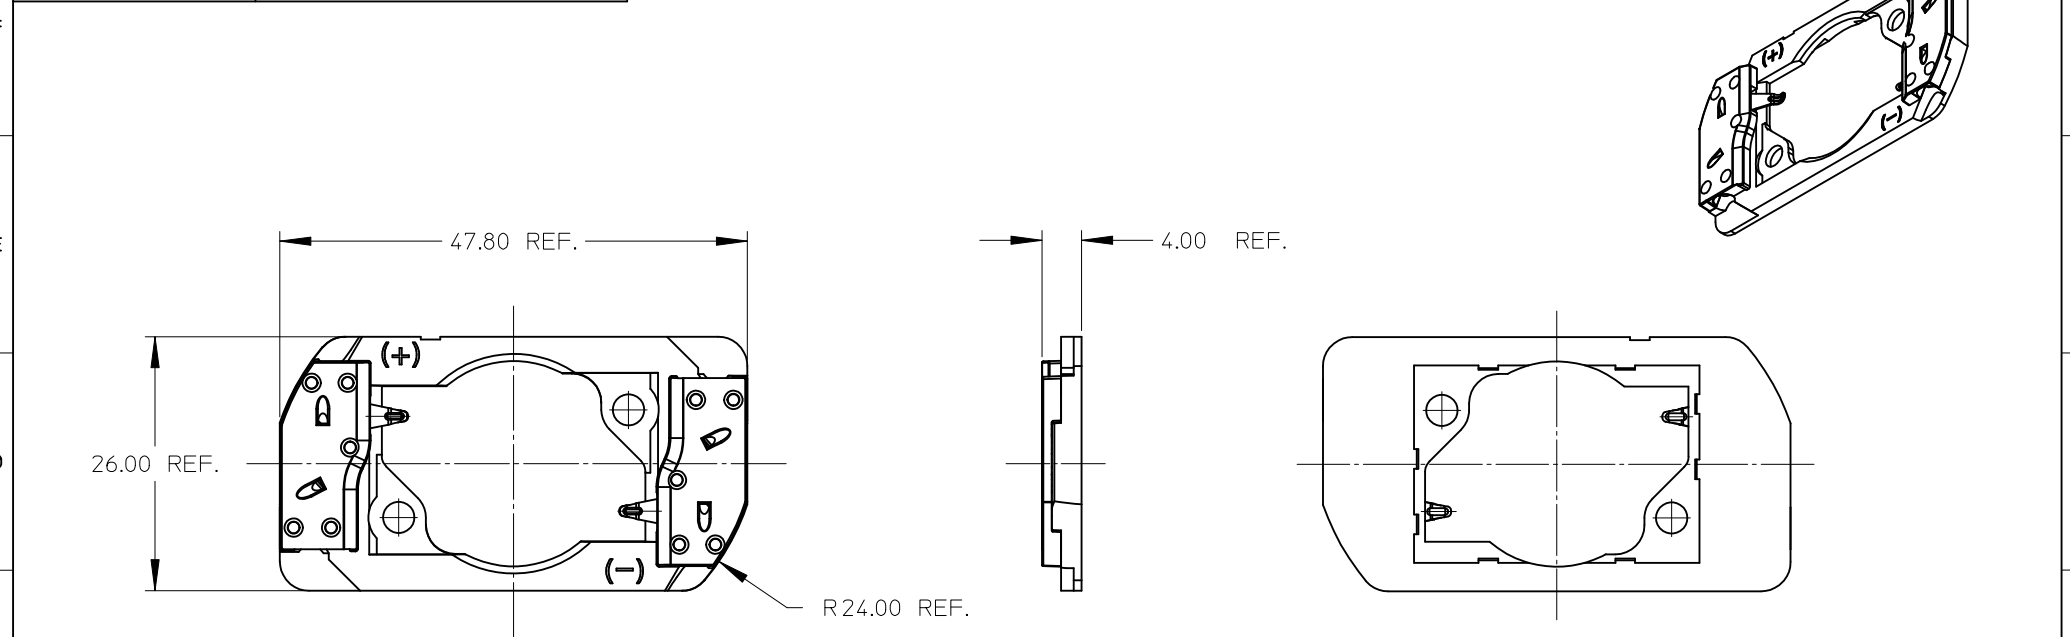



- NOTES:
- 1) MATERIALS:
 - a. CAPS: NATURAL COLOR PA66 NYLON 25% GF UL94V-0
 - b. HOUSING: NATURAL COLOR PA66 NYLON 25% GF UL94V-0
 - 2) WIRE TRAP TERMINALS: COPPER ALLOY
 - a. FINISH: GOLD OVER NICKEL
 - 3) THIS PRODUCT IS ELV AND ROHS COMPLIANT
 - 4) APPLICABLE WIRE GAUGE - 18 OR 20 AWG
 - a. SOLID WIRE IS RECOMMENDED
 - b. IF STRANDED WIRE IS USED, PRE-TINNED IS RECOMMENDED
 - c. 1 cm STRIP LENGTH IS RECOMMENDED
 - 5) MOUNT HOLDER USING M3 OR 4-40 SCREWS (2), 0.8 NEWTON METERS MAX TORQUE
 - 6) FOR CITIZEN L-330 LED HOLDER OUTER MOUNT VERSION REFER TO SALES DRAWING SD-180260-002
 - 7) UL RECOGNIZED TO UL496
 - c-UL RECOGNIZED TO CSA-C22.2 NO. 43 (2008) RATED 600V
 - UL FILE NUMBER: E345583, UL-OLFB2

ENTER DESCRIPTION EC NO: SSL2012-0008 DRAWN BY JAKLIC 2011/08/02 CHKD: APPR:DMCGOWAN 2011/08/05 REV	QUALITY SYMBOLS ▽ _A =0 ▽ _G =0 ▽ _P =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY FJAKLIC	DATE 2011/04/12	TITLE CITIZEN L-330 LED HOLDER			
		4 PLACES	± ---	± ---	CHECKED BY	DATE				
		3 PLACES	± ---	± ---	APPROVED BY DMCGOWAN		DATE 2011/05/03		molex MOLEX INCORPORATED	
		2 PLACES	± 0.13	± ---						
		1 PLACE	± 0.25	± ---	MATERIAL NO. 1802600000		DOCUMENT NO. SD-180260-001		SHEET NO. 1 OF 2	
ANGULAR ±1/2°										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							


10 9 8 7 6 5 4 3 2 1

WIRE TRAP CAPS ARE REMOVED FROM FRONT VIEW FOR CLARITY

SEE DETAIL 1

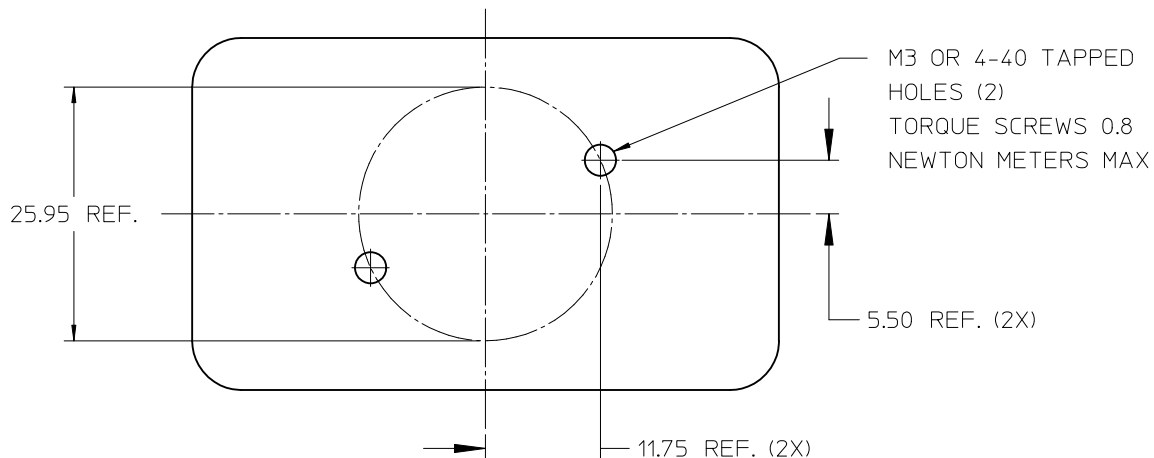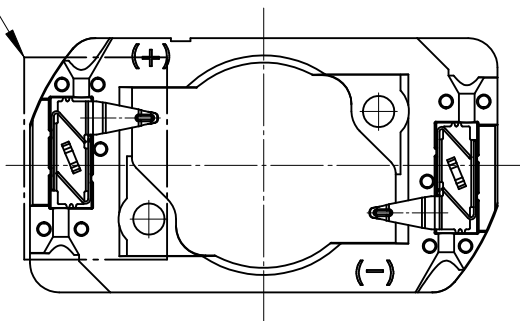

RECOMMENDED MOUNTING DIMENSIONS

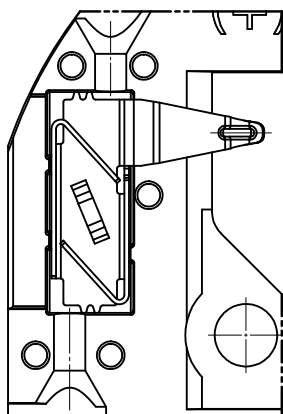

VIEW OF TWO-WAY WIRE TRAP

WIRE TRAPS WILL ACCOMODATE
EITHER 18 OR 20 GAUGE WIRE

DETAIL 1 SCALE 4:1

ENTER DESCRIPTION EC NO: SSL2012-0008 DRAWN: FJAKLIC 2011/08/02 CHKD: APPR: DMCOWAN 2011/08/05 REV		DESCRIPTION	QUALITY SYMBOLS F_A=0 F_B=0 F_P=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
						DRAWN BY DATE		TITLE CITIZEN L-330 LED HOLDER		
						CHECKED BY DATE				
						APPROVED BY DATE				
B1		REV		mm INCH	FJAKLIC 2011/04/12		 MOLEX INCORPORATED			
				4 PLACES ± --- ± ---	DATE					
				3 PLACES ± --- ± ---	DATE					
B1		REV		2 PLACES ± 0.13 ± ---	DMCOWAN 2011/05/03		SD-180260-001		SHEET NO. 2 OF 2	
				1 PLACE ± 0.25 ± ---	DATE					
				ANGULAR ± 1/2°		DOCUMENT NO.				
B1		REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	1802600000		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
					SIZE B					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.