

Powered by



UPS12240 6 ▶

UPS 12240 6 is specially designed for high efficient discharge application. Its characteristics are high energy density, small footprint and high discharge efficiency. It can be used for more than 260 cycles at 100% discharge in cycle service, up to 5 years in standby service.



► Specification


| | |
|---|---|
| Cells Per Unit | 6 |
| Voltage Per Unit | 12 |
| | 240W @ 5min-rate to Watt(1.60V)/pcs @25°C (77°F) |
| Capacity | |
| Weight | Approx. 1.45 kg(3.2 lbs) |
| Maximum Discharge Current | 100/130A(5sec) |
| Internal Resistance | Approx. 32mΩ |
| Operating Temperature Range | Discharge: -15°C~50°C (5°F~122°F) Charge: -15°C~40°C (5°F~104°F) Storage: -15°C~40°C (5°F~104°F) |
| Nominal Operating Temperature Range | 25°C±3°C (77°F±5°F) |
| Float Charging Voltage | 13.5 to 13.8 VDC/unit Average at 25°C (77°F) |
| Recommended Maximum Charging Current Limit | 2.0A |
| Equalization and Cycle Service | 14.4 to 15.0 VDC/unit Average at 25°C (77°F) |
| Self Discharge | CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter. |
| Terminal | F1/F2-Faston Tab 180/250 |
| Container Material | ABS(UL 94-HB) & Flammability resistance of (UL 94-V0) can be available upon request. |



CSB-manufactured **VRLA** (Absorbent Glass Mat type) batteries are UL-recognized components under UL1989.

CSB is also certified by ISO 9001 and ISO 14001.

| ► Dimensions : | Overall Height (H) | Container height (h) | Length (L) | Width (W) |
|-----------------|----------------------|----------------------|-----------------------|----------------------|
| Unit: mm (inch) | 98.3±1.0 (3.87±0.04) | 94.0±1.0 (3.70±0.04) | 151.0±2.0 (5.94±0.08) | 51.0±1.0 (2.01±0.04) |

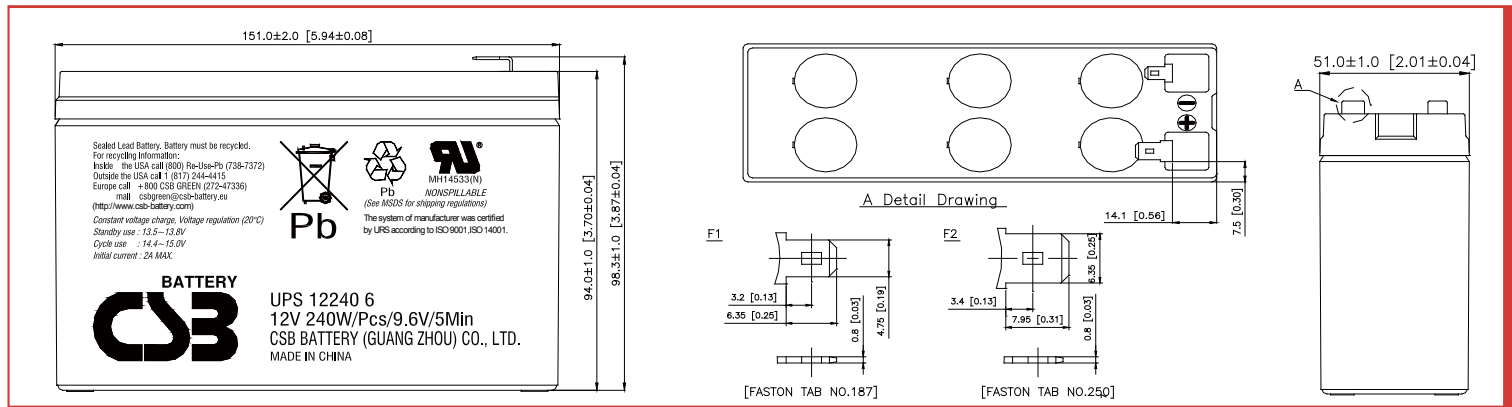

Constant Current Discharge Characteristics Unit:A (25°C,77°F)


| F.V/Time | 2MIN | 3MIN | 4MIN | 5MIN | 6MIN | 7MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 60MIN | 90MIN |
|----------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| 1.60V | 42.4 | 32.6 | 27.2 | 23.6 | 20.6 | 18.3 | 16.1 | 13.5 | 9.89 | 7.93 | 5.80 | 3.35 | 2.41 |
| 1.67V | 37.4 | 30.3 | 26.0 | 22.7 | 20.0 | 17.7 | 15.9 | 13.3 | 9.77 | 7.88 | 5.77 | 3.34 | 2.40 |
| 1.70V | 35.2 | 29.1 | 25.2 | 22.0 | 19.7 | 17.4 | 15.6 | 13.2 | 9.67 | 7.86 | 5.75 | 3.31 | 2.38 |
| 1.75V | 31.4 | 26.7 | 23.5 | 20.8 | 18.5 | 16.6 | 14.9 | 12.8 | 9.57 | 7.73 | 5.69 | 3.28 | 2.36 |
| 1.80V | 27.7 | 24.4 | 21.3 | 19.1 | 16.9 | 15.2 | 14.0 | 12.1 | 9.22 | 7.48 | 5.55 | 3.22 | 2.32 |
| 1.85V | 24.0 | 21.0 | 19.0 | 16.7 | 15.0 | 13.7 | 12.6 | 11.0 | 8.53 | 6.96 | 5.28 | 3.08 | 2.23 |

Constant Power Discharge Characteristics Unit:W (25°C,77°F)


| F.V/Time | 2MIN | 3MIN | 4MIN | 5MIN | 6MIN | 7MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 60MIN | 90MIN |
|----------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| 1.60V | 383 | 321 | 275 | 240 | 213 | 192 | 177 | 151 | 112.0 | 90.1 | 66.1 | 38.5 | 28.1 |
| 1.67V | 362 | 306 | 264 | 233 | 208 | 189 | 174 | 149 | 111.0 | 89.7 | 65.7 | 38.4 | 28.0 |
| 1.70V | 350 | 297 | 258 | 228 | 205 | 187 | 171 | 148 | 110.0 | 89.4 | 65.6 | 38.3 | 27.9 |
| 1.75V | 324 | 277 | 243 | 217 | 196 | 180 | 166 | 144 | 109.0 | 88.1 | 65.1 | 38.1 | 27.8 |
| 1.80V | 296 | 254 | 226 | 201 | 184 | 170 | 156 | 136 | 105.0 | 85.5 | 63.7 | 37.5 | 27.4 |
| 1.85V | 258 | 228 | 203 | 184 | 170 | 154 | 143 | 127 | 97.8 | 79.7 | 61.3 | 36.1 | 26.4 |

Ratings presented herein are subject to revision without notice. Please refer to www.csb-battery.com to confirm the latest version.


Trickle (or Float) Service Life

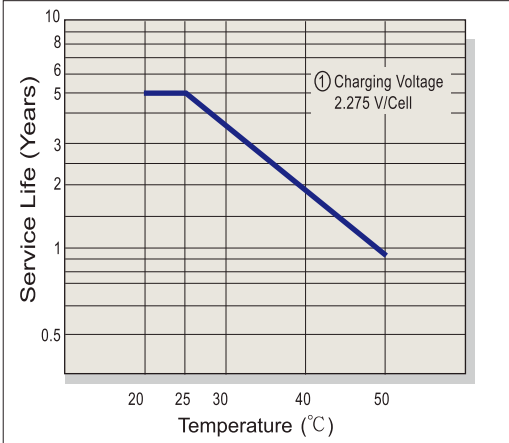


Capacity Retention Characteristic

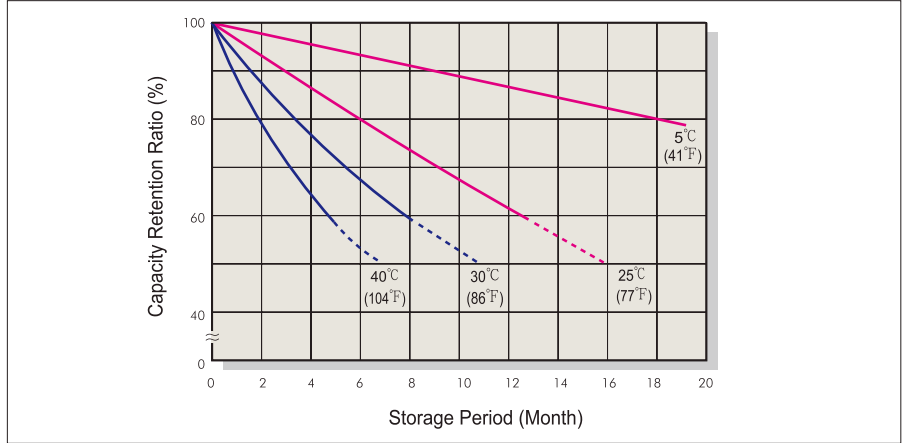


Battery Voltage and Charge Time for Standby Use

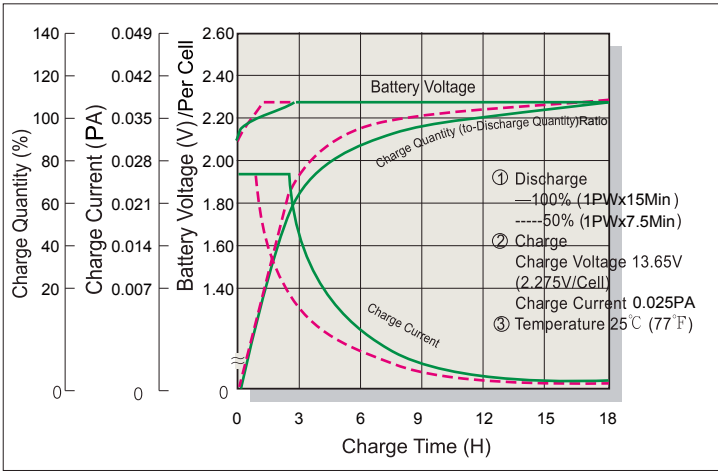


Cycle Service Life

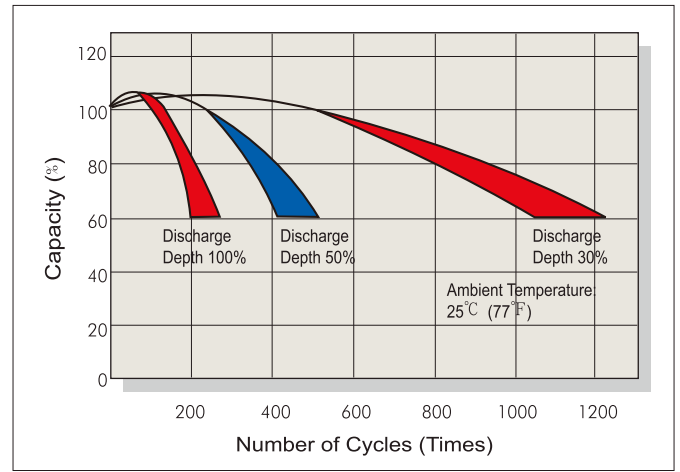

Battery Voltage and Charge Time for Cycle Use

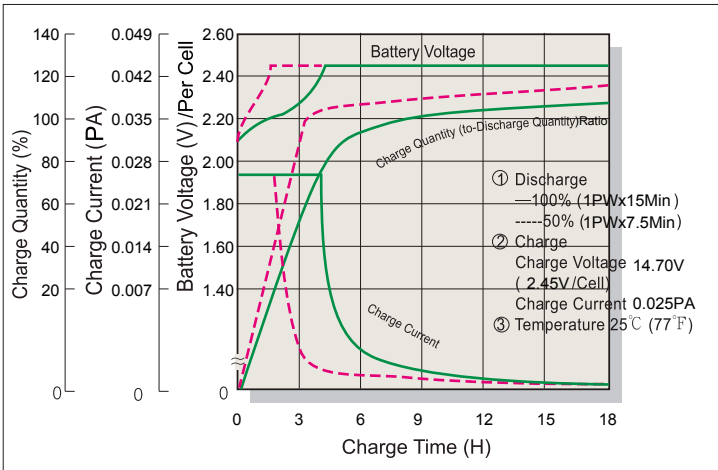

Terminal Voltage (V) and Discharge Time

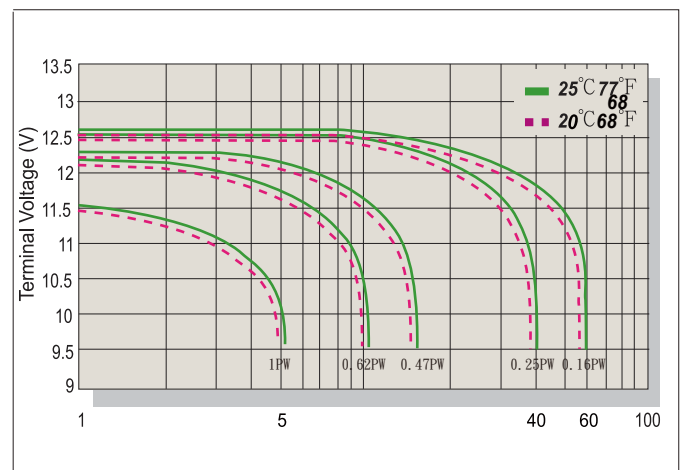

Charging Procedures

| Application | Charge Voltage(V/Cell) | | | Max.Charge Current |
|-------------|------------------------|-----------|-----------------|--------------------|
| | Temperature | Set Point | Allowable Range | |
| Cycle Use | 25°C(77°F) | 2.45 | 2.40~2.50 | 0.1PA |
| Standby | 25°C(77°F) | 2.275 | 2.25~2.30 | |

P: For single cell wattage at 15 minute rate to 1.67V per cell.

Discharge Current VS. Discharge Voltage

| Final Discharge Voltage V/Cell | 1.75 | 1.70 | 1.60 | 1.30 |
|--------------------------------|----------|----------------|----------------|----------|
| Discharge Power(W) | 0.1P>(W) | 0.1P≤(W)<0.25P | 0.25P≤(W)<1.0P | (W)≥1.0P |

Sales Office URL: WWW.CSB-BATTERY.COM

GLOBAL HQ CSB BATTERY CO., LTD. (TAIWAN)

Tel : +886-2-2880-5600
Fax : +886-2-2888-3300
mail : service@csb-battery.com.tw

BEIJING OFFICE. (CHINA)

CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD.
Tel : +86-10-5820-5336/5338
Fax : +86-10-58203053
mail : chinasl@csb-battery.com

AMERICA HQ

CSB BATTERY TECHNOLOGIES INC. (U.S.A)
Tel : +1-817-244-7777/1-(800)3-CSB-USA(272872)
Fax : +1-817-244-4445
mail : csb@csb-battery.com

SHANGHAI OFFICE. (CHINA)

CSB BATTERY LOGISTIC (SHANGHAI) CO., LTD.
Tel : +86-21-5046-1622/5046-0833
Fax : +86-21-5064-1046
mail : chinasl@csb-battery.com

EUROPE HQ

CSB Battery Europe BV.
Tel : +31(0)-180-418-140
Fax : +31(0)-180-418-327
mail : eurosales@csb-battery.eu

SHENZHEN OFFICE.(CHINA)

CSB BATTERY LOGISTIC (SHANGHAI) CO., LTD.
Tel : +86-755-8831-6488/6396/6356
Fax : +86-755-8831-6548
mail : she@csb-battery.com.cn



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.