


Features

- ◆ Small size, low profile
- ◆ SMT package or SIP version
- ◆ Cost-efficient open frame design
- ◆ Wide input voltage ranges
- ◆ Output voltages trim from 0.75 VDC to 5.5 VDC
- ◆ Delivers up to 30 A with minimal derating
- ◆ Ultra high efficiency to 96 %
- ◆ Fast transient response
- ◆ Remote On/Off control
- ◆ Wide temperature range -40°C to +85°C
- ◆ SMT package fully DOSA compatible
- ◆ Lead free design – RoHS compliant

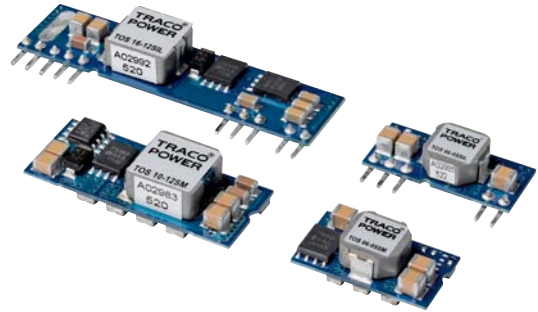

The TOS series is a range of high performance non-isolated dc-dc converters With very high efficiency that can supply up to 30A of output current. These modules provide precisely regulated output voltages which can be set via an external resistor to a value from 0.75 VDC to 5.5 VDC. These converters work over a wide input voltage range of 2.4 to 5.5 VDC or 8.3 to 14.0 VDC. Further features include remote On/Off, under voltage lockout, over temperature and over current protection. These products have an open-frame construction with very small footprint and are available in an industry standard SIP or in a SMT package. The TOS series is fully RoHS compliant and can withstand industry standard handling, cleaning and the high temperatures of lead-free reflow solder processes.

Models

| Order code SMT-version | Input voltage range | Output voltage range | Output current max. | Efficiency typ. |
|---------------------------|---------------------|----------------------|---------------------|-----------------|
| TOS 06-05SM | 2.4 – 5.5 VDC | 0.75 – 3.3 VDC** | 6 A | 94 % |
| TOS 10-05SM | | | 10 A | 93 % |
| TOS 16-05SM | | | 16 A | 95 % |
| TOS 06-12SM | 8.3 – 14.0 VDC | 0.75 – 5.0 VDC | 6 A | 89 % |
| TOS 10-12SM | | | 10 A | 93 % |
| TOS 16-12SM | | | 16 A | 92 % |
| SIL-version | | | | |
| TOS 06-05SIL | 2.4 – 5.5 VDC | 0.75 – 3.3 VDC* | 6 A | 94 % |
| TOS 10-05SIL | | | 10 A | 93 % |
| TOS 16-05SIL | | | 16 A | 95 % |
| TOS 06-12SIL | 8.3 – 14 VDC | 0.75 – 5.0 VDC | 6 A | 89 % |
| TOS 10-12SIL | | | 10 A | 93 % |
| TOS 16-12SIL | | | 16 A | 92 % |

Models

Datasheet for 30A Models see: www.tracopower.com/products/tox30.pdf

| Order code SMT-version | Input voltage range | Output voltage range | Output current max. | Efficiency typ. |
|---------------------------|---------------------|----------------------|---------------------|-----------------|
| TOS 30-05SM | 4.5 – 5.5 VDC | 0.80 – 3.6 VDC | 30 A | 93 % |
| TOS 30-12SM | 6.0 – 14.0 VDC | 0.80 – 3.6 VDC | 30 A* | 92 % |
| SIL-version | | | | |
| TOS 30-05SIL | 4.5 – 5.5 VDC | 0.80 – 5.5 VDC | 30 A | 93 % |
| TOS 30-12SIL | 6.0 – 14.0 VDC | 0.80 – 5.5 VDC | 30 A* | 92 % |

* 25 A output voltage higher than 2.75 VDC

** Max output voltage to be adjusted min. 0.5 VDC below impressed input voltage

Input Specifications

| | | |
|---|---------------------------------------|---|
| Input current no load | – Vin 5 VDC (at Vout min./Vout max.) | 6 A models: 20 mA / 45 mA typ. 10 A models: 25 mA / 30 mA typ. 16 A models: 25 mA / 40 mA typ. |
| | – Vin 12 VDC (at Vout min./Vout max.) | 6 A models: 17 mA / 100 mA typ. 10 A models: 40 mA / 100 mA typ. 16 A models: 40 mA / 100 mA typ. |
| Stand by input current (at remote Off) | | 6 A models: 1 mA typ. 10 A / 16 A models: 2 mA typ. |
| Max. input current | – Vin 5 VDC | 6 A models: 6 A 10 A models: 10 A 16 A models: 16 A |
| | – Vin 12 VDC | 6 A models: 4.5 A 10 A models: 7 A 16 A models: 10 A |
| Start up voltage / under voltage lockout | | 5 Vin models: 2.2 VDC / 2.0 VDC typ. 12 Vin models: 7.9 VDC / 7.8 VDC typ. |
| Start up time (power / remote On till Vout set) | | 8 mS typ. |
| Reflected ripple current (with input filter) | – Vin 5 VDC | 6 A models: 35 mA typ. 10 A / 16 A models: 100 mA typ. |
| | – Vin 12 VDC | 6 A models: 30 mA typ. 10 A models: 20 mA typ. 16 A models: 20 mA typ. |
| Input filter external (recommended) | | 2 x 150 µF low ESR polymer capacitors and 2 x 47 µF ceramic capacitors |

Output Specifications

| | | |
|--|---|---|
| Voltage set accuracy | | ±2 % max. (see page 3 for set up) |
| Voltage balance (dual output models) | | ±1 % max. |
| Regulation | – Input variation | ±0.3 % max. |
| | – Load variation 0 – 100 % | ±0.4 % max. |
| Dynamic load response max. peak variation / response time | – 50 % load change (upper half) with external 1 µF ceramic- and 10 µF tantalum capacitors | |
| | Vin 5 VDC, 6 A models: | 130 mV / 60 µS typ. |
| | Vin 12 VDC, 6 A models: | 200 mV / 35 µS typ. |
| | Vin 5 VDC, 10 A models: | 200 mV / 25 µS typ. |
| | Vin 12 VDC, 10 A models: | 200 mV / 25 µS typ. |
| | Vin 5 VDC, 16 A models: | 300 mV / 25 µS typ. |
| | Vin 12 VDC, 16 A models: | 200 mV / 25 µS typ. |
| | – 50 % load change (upper half) with external 2 x 150 µF polymer capacitors | |
| | Vin 5 VDC, 6 A models: | 50 mV / 100 µS typ. |
| | Vin 12 VDC, 6 A models: | 50 mV / 50 µS typ. |
| Vin 5 VDC, 10 A models: | 100 mV / 100 µS typ. | |
| Vin 12 VDC, 10 A models: | 100 mV / 25 µS typ. | |
| Vin 5 VDC, 16 A models: | 150 mV / 100 µS typ. | |
| Vin 12 VDC, 16 A models: | 100 mV / 50 µS typ. | |
| Ripple and noise (20 MHz Bandwidth) | | 5 Vin models: 50 mV pk-pk max. 12 Vin models: 75 mV pk-pk max. |
| Temperature coefficient | | ±0.4 % typ. |
| Over current protection | | at +200 % of Iout max. typ. |
| Short circuit protection | | indefinite, automatic recovery |
| Capacitive load | – ESR <1 mOhm | 1000 µF max. |
| | – ESR <10 mOhm | 6 A models: 3000 µF max. 10 A / 16 A models: 5000 µF max. |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


| | | |
|---|------------------------------------|---|
| Temperature ranges | - Operating - Storage | -40°C to +85°C -55°C to +125°C |
| Derating | | see application note |
| Over temperature protection | | at +125°C typ. |
| Humidity (non condensing) | | 95 % rel H max. |
| Reliability, calculated MTBF (Bellcore TR-NWT-000332) | 6 A models: 10 A / 16 A models: | >20 mio. h at +40°C >14 mio. h at +40°C |
| Switching frequency | | 300 kHz typ. (pulse width modulation - PWM) |
| Remote On/Off (reference to GND) | | On: 1 VDC to Vin max. or open circuit. Off: 0 to 0.3 VDC |

Physical Specifications

| | | |
|-------------------|------------------------------------|--|
| Weight | 6 A models: 10 A / 16 A models: | 2.8 g 6.0 g |
| Soldering profile | - SIL - Version - SMT - Version | max. 265°C / 10 sec. (wave soldering) peak temp. 245°C for 10 sec. max., 217°C for 90 sec. max. (Convection reflow solder process is recommended) |

Application note: www.tracopower.com/products/tos-application.pdf

Output Voltage Adjustment



5 VDC input models: $R_d [\text{Ohm}] = \frac{21070}{V_o - 0.7525} - 5110$


12 VDC input models: $R_d [\text{Ohm}] = \frac{10570}{V_o - 0.7525} - 1000$

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Outline Dimensions mm (inches)

Single-in-Line (SIL-Version)

6 A output Models

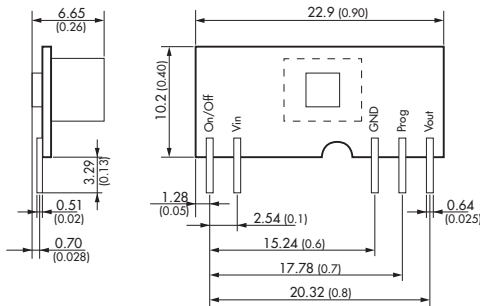


10A & 16A output models

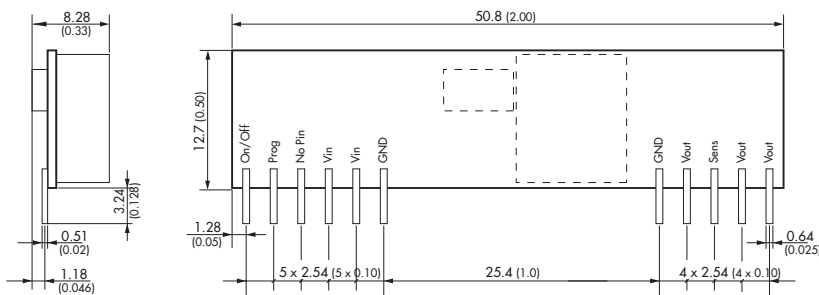


Surface Mount (SMT-Version)

6 A output Models

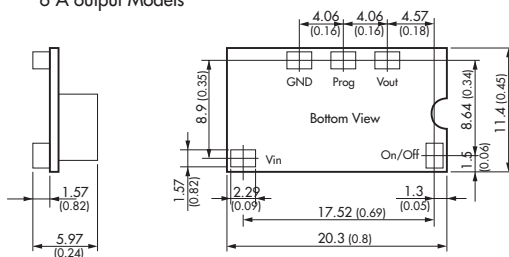

10A & 16A output models

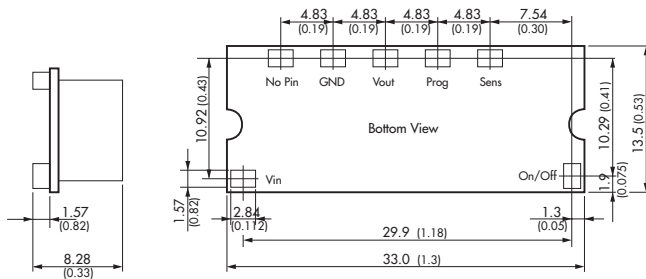

Specifications can be changed any time without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.