



Loose



Taped

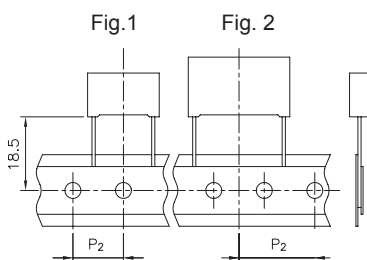

Ød ±0.05	p = 10	p > 10	p = 37.5
	0.6	0.8	1.0

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
R	6	0										-	

Digit 1 to 3 Series code.

Digit 4 d.c. rated voltage:

 C = 50V D = 63V E = 100V G = 160V
 I = 250V M = 400V P = 630V Q = 1000V

Digit 5 Pitch:

 F = 10mm; I = 15mm; N = 22.5mm; R = 27.5mm;
 W = 37.5mm

Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.

Digit 10 to 11 Mechanical version and/or packaging (table 1)

Digit 12 Identifies the dimensions and electrical characteristics.

Digit 13 Internal use

 Digit 14 Capacitance tolerance:
 J=5%; K=10%; M=20%.

METALLIZED POLYESTER FILM CAPACITOR D.C. MULTIPURPOSE APPLICATIONS

Typical applications: blocking, coupling, decoupling, by-passing, interference suppression in low voltage applications (i.e.: AUTOMOTIVE).

PRODUCT CODE: R60

Note: Special version, in compliance with DIN 44122 is available upon request.

Construction:

- **STACKED technology for pitch 10mm**
(Rated Voltage from 50 to 630Vdc)

- **WOUND technology from pitch 10 to 27.5mm**
(Rated Voltage from 63 to 1000Vdc)

Pitch (mm)	Box thickness (B) (mm)	Maximum dimensions (mm)		
		B max	H max	L max
10.0	All	B + 0.2	H + 0.1	L + 0.2
15.0	<7.5	B + 0.2	H + 0.1	L + 0.3
15.0	≥7.5	B + 0.2	H + 0.1	L + 0.5
22.5	All	B + 0.2	H + 0.1	L + 0.3
27.5	All	B + 0.2	H + 0.1	L + 0.3
37.5	All	B + 0.3	H + 0.1	L + 0.3

GENERAL TECHNICAL DATA

Dielectric: polyester film (polyethylene terephthalate).**Plates:** aluminium layer deposited by evaporation under vacuum.**Winding:** non-inductive type.**Leads:** tinned wire.
Protection: plastic case, thermosetting resin filled.
 Box material is solvent resistant and flame retardant according to UL94.

Marking: Manufacturer's logo (if requested), capacitance, tolerance, D.C. rated voltage.
Climatic category: 55/105/56 IEC 60068-1**Operating temperature range:** -55 to +105°C

Upper operating temperature of +125°C is allowed for a max. operating time of 1000h.

Related documents: IEC 60384-2

Winding scheme

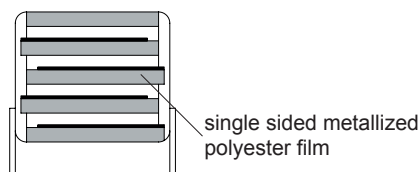


Table 1 (for more detailed information, please refer to page 14)

Standard packaging style	Lead length (mm)	Taping style			Ordering code (Digit 10 to 11)
		P ₂ (mm)	Fig. (No.)	Pitch (mm)	
AMMO-PACK		12.70	1	10.0/15.0	DQ
AMMO-PACK		19.05	2	22.5	DQ
REEL Ø 355mm		12.70	1	10.0/15.0	GY
REEL Ø 500mm		12.70	1	10.0/15.0	CK
REEL Ø 500mm		19.05	2	22.5/27.5	CK
Loose, short leads	4 ⁺²				AA
Loose, long leads (p < 10mm)	17 ^{+1/-2}				Z3
Loose, long leads (p ≥ 15mm)	30 ⁺⁵ 25 ^{+2/-1}				40 50

Note: Ammo-pack is the preferred packaging for taped version.

**METALLIZED POLYESTER FILM CAPACITOR
 D.C. MULTIPURPOSE APPLICATIONS**

 PRODUCT CODE: **R60**
STACKED VERSION

Rated Cap.	50Vdc/30Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1.5 μF	4.0	9.0	13.0	10.0	30	3 E3	R60CF4150--6--
2.2 μF	4.0	9.0	13.0	10.0	30	3 E3	R60CF4220--6--
3.3 μF	5.0	11.0	13.0	10.0	30	3 E3	R60CF4330--6--
4.7 μF	6.0	12.0	13.0	10.0	30	3 E3	R60CF4470--6--
5.6 μF	6.0	12.0	13.0	10.0	30	3 E3	R60CF4560--6--

Rated Cap.	63Vdc/40Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1.0 μF	4.0	9.0	13.0	10.0	50	6.3 E3	R60DF4100--6--
1.5 μF	5.0	11.0	13.0	10.0	50	6.3 E3	R60DF4150--6--
2.2 μF	5.0	11.0	13.0	10.0	50	6.3 E3	R60DF4220--6--
3.3 μF	6.0	12.0	13.0	10.0	50	6.3 E3	R60DF4330--6--

Rated Cap.	100Vdc/63Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.33 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF3330--6--
0.47 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF3470--6--
0.68 μF	4.0	9.0	13.0	10.0	75	15 E3	R60EF3680--6--
1.0 μF	5.0	11.0	13.0	10.0	75	15 E3	R60EF4100--6--
1.5 μF	5.0	11.0	13.0	10.0	75	15 E3	R60EF4150--6--

Rated Cap.	160Vdc/90Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.22 μF	4.0	9.0	13.0	10.0	100	32 E3	R60GF3220--6--
0.33 μF	4.0	9.0	13.0	10.0	100	32 E3	R60GF3330--6--
0.47 μF	5.0	11.0	13.0	10.0	100	32 E3	R60GF3470--6--
0.68 μF	6.0	12.0	13.0	10.0	100	32 E3	R60GF3680--6--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

Rated Cap.	250Vdc/160Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.10 μF	4.0	9.0	13.0	10.0	150	75 E3	R60IF3100--6--
0.15 μF	4.0	9.0	13.0	10.0	150	75 E3	R60IF3150--6--
0.22 μF	5.0	11.0	13.0	10.0	150	75 E3	R60IF3220--6--
0.33 μF	5.0	11.0	13.0	10.0	150	75 E3	R60IF3330--6--
0.47 μF	6.0	12.0	13.0	10.0	150	75 E3	R60IF3470--6--

Rated Cap.	400Vdc/200Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.033 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2330--6--
0.047 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2470--6--
0.068 μF	4.0	9.0	13.0	10.0	175	140 E3	R60MF2680--6--
0.10 μF	5.0	11.0	13.0	10.0	175	140 E3	R60MF3100--6--
0.15 μF	6.0	12.0	13.0	10.0	175	140 E3	R60MF3150--6--

Rated Cap.	630Vdc/220Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.010 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF2100--6--
0.015 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF2150--6--
0.022 μF	4.0	9.0	13.0	10.0	200	250 E3	R60PF2220--6--
0.033 μF	5.0	11.0	13.0	10.0	200	250 E3	R60PF2330--6--
0.047 μF	5.0	11.0	13.0	10.0	200	250 E3	R60PF2470--6--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

All dimensions are in mm.

 Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

 The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

*Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: R60

WOUND VERSION

Rated Cap.	63Vdc/40Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.68 μF	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 3680--3--
1.0 μF	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 4100--3--
1.5 μF	5.0	11.0	18.0	15.0	2.5	0.32 E3	R60DI 4150--3--
2.2 μF	6.0	12.0	18.0	15.0	2.5	0.32 E3	R60DI 4220--3--
3.3 μF	7.5	13.5	18.0	15.0	2.5	0.32 E3	R60DI 4330--3--
3.3 μF	9.0	12.5	18.0	15.0	2.5	0.32 E3	R60DI 4330--L--
4.7 μF	8.5	14.5	18.0	15.0	2.5	0.32 E3	R60DI 4470--3--
4.7 μF	13.0	12.0	18.0	15.0	2.5	0.32 E3	R60DI 4470--L--
6.8 μF	10.0	16.0	18.0	15.0	2.5	0.32 E3	R60DI 4680--3--
3.3 μF	6.0	15.0	26.5	22.5	1.5	0.19 E3	R60DN4330--3--
4.7 μF	7.0	16.0	26.5	22.5	1.5	0.19 E3	R60DN4470--3--
6.8 μF	7.0	16.0	26.5	22.5	1.5	0.19 E3	R60DN4680--3--
10.0 μF	8.5	17.0	26.5	22.5	1.5	0.19 E3	R60DN5100--3--
15.0 μF	11.0	20.0	26.5	22.5	1.5	0.19 E3	R60DN5150--3--
10.0 μF	9.0	17.0	32.0	27.5	1.0	0.13 E3	R60DR5100--3--
15.0 μF	9.0	17.0	32.0	27.5	1.0	0.13 E3	R60DR5150--4--
22.0 μF	11.0	20.0	32.0	27.5	1.0	0.13 E3	R60DR5220--4--
33.0 μF	13.0	22.0	32.0	27.5	1.0	0.13 E3	R60DR5330--4--
47.0 μF	14.0	28.0	32.0	27.5	1.0	0.13 E3	R60DR5470--4--
68.0 μF	18.0	33.0	32.0	27.5	1.0	0.13 E3	R60DR5680--4--
100.0 μF	22.0	37.0	32.0	27.5	1.0	0.13 E3	R60DR6100--0--
22.0 μF	11.0	22.0	41.5	37.5	0.8	0.10 E3	R60DW5220--3--
33.0 μF	11.0	22.0	41.5	37.5	0.8	0.10 E3	R60DW5330--4--
47.0 μF	13.0	24.0	41.5	37.5	0.8	0.10 E3	R60DW5470--4--
68.0 μF	19.0	32.0	41.5	37.5	0.8	0.10 E3	R60DW5680--3--
100.0 μF	19.0	32.0	41.5	37.5	0.8	0.10 E3	R60DW6100--4--
150.0 μF	20.0	40.0	41.5	37.5	0.8	0.10 E3	R60DW6150--0--
220.0 μF	24.0	44.0	41.5	37.5	0.8	0.10 E3	R60DW6220--0--

Rated Cap.	100Vdc/63Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.33 μF	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3330--3--
0.47 μF	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3470--3--
0.68 μF	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 3680--3--
1.0 μF	5.0	11.0	18.0	15.0	3.0	0.6 E3	R60EI 4100--3--
1.5 μF	7.5	13.5	18.0	15.0	3.0	0.6 E3	R60EI 4150--3--
2.2 μF	8.5	14.5	18.0	15.0	3.0	0.6 E3	R60EI 4220--3--
2.2 μF	9.0	12.5	18.0	15.0	3.0	0.6 E3	R60EI 4220--L--
3.3 μF	10.0	16.0	18.0	15.0	3.0	0.6 E3	R60EI 4330--3--
3.3 μF	13.0	12.0	18.0	15.0	3.0	0.6 E3	R60EI 4330--L--
4.7 μF	11.0	19.0	18.0	15.0	3.0	0.6 E3	R60EI 4470--3--
1.5 μF	6.0	15.0	26.5	22.5	2.0	0.4 E3	R60EN4150--3--
2.2 μF	6.0	15.0	26.5	22.5	2.0	0.4 E3	R60EN4220--3--
3.3 μF	7.0	16.0	26.5	22.5	2.0	0.4 E3	R60EN4330--3--
4.7 μF	8.5	17.0	26.5	22.5	2.0	0.4 E3	R60EN4470--3--
6.8 μF	10.0	18.5	26.5	22.5	2.0	0.4 E3	R60EN4680--3--
10.0 μF	13.0	22.0	26.5	22.5	2.0	0.4 E3	R60EN5100--3--
4.7 μF	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER4470--3--
6.8 μF	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER4680--3--
10.0 μF	9.0	17.0	32.0	27.5	1.5	0.3 E3	R60ER5100--4--
15.0 μF	11.0	20.0	32.0	27.5	1.5	0.3 E3	R60ER5150--4--
22.0 μF	13.0	22.0	32.0	27.5	1.5	0.3 E3	R60ER5220--4--
33.0 μF	14.0	28.0	32.0	27.5	1.5	0.3 E3	R60ER5330--4--
47.0 μF	18.0	33.0	32.0	27.5	1.5	0.3 E3	R60ER5470--4--
68.0 μF	22.0	37.0	32.0	27.5	1.5	0.3 E3	R60ER5680--0--
15.0 μF	11.0	22.0	41.5	37.5	1.0	0.2 E3	R60EW5150--4--
22.0 μF	11.0	22.0	41.5	37.5	1.0	0.2 E3	R60EW5220--4--
33.0 μF	13.0	24.0	41.5	37.5	1.0	0.2 E3	R60EW5330--4--
47.0 μF	16.0	28.5	41.5	37.5	1.0	0.2 E3	R60EW5470--4--
68.0 μF	19.0	32.0	41.5	37.5	1.0	0.2 E3	R60EW5680--5--
100.0 μF	20.0	40.0	41.5	37.5	1.0	0.2 E3	R60EW6100--0--
150.0 μF	24.0	44.0	41.5	37.5	1.0	0.2 E3	R60EW6150--0--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

All dimensions are in mm.

Rated Cap.	160Vdc/90Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.33 μF	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3330--3--
0.47 μF	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3470--3--
0.68 μF	5.0	11.0	18.0	15.0	9.0	2.90 E3	R60GI 3680--3--
1.0 μF	7.5	13.5	18.0	15.0	9.0	2.90 E3	R60GI 4100--3--
1.5 μF	8.5	14.5	18.0	15.0	9.0	2.90 E3	R60GI 4150--3--
1.5 μF	9.0	12.5	18.0	15.0	9.0	2.90 E3	R60GI 4150--L--
2.2 μF	10.0	16.0	18.0	15.0	9.0	2.90 E3	R60GI 4220--3--
2.2 μF	13.0	12.0	18.0	15.0	9.0	2.90 E3	R60GI 4220--L--
3.3 μF	11.0	19.0	18.0	15.0	9.0	2.90 E3	R60GI 4330--3--
1.5 μF	6.0	15.0	26.5	22.5	5.5	1.70 E3	R60GN4150--3--
2.2 μF	7.0	16.0	26.5	22.5	5.5	1.70 E3	R60GN4220--3--
3.3 μF	8.5	17.0	26.5	22.5	5.5	1.70 E3	R60GN4330--3--
4.7 μF	11.0	20.0	26.5	22.5	5.5	1.70 E3	R60GN4470--3--
6.8 μF	13.0	22.0	26.5	22.5	5.5	1.70 E3	R60GN4680--3--
3.3 μF	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4330--3--
4.7 μF	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4470--3--
6.8 μF	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR4680--4--
10.0 μF	9.0	17.0	32.0	27.5	3.0	0.96 E3	R60GR5100--4--
15.0 μF	11.0	20.0	32.0	27.5	3.0	0.96 E3	R60GR5150--4--
22.0 μF	13.0	22.0	32.0	27.5	3.0	0.96 E3	R60GR5220--4--
33.0 μF	14.0	28.0	32.0	27.5	3.0	0.96 E3	R60GR5330--0--
47.0 μF	18.0	33.0	32.0	27.5	3.0	0.96 E3	R60GR5470--0--
68.0 μF	22.0	37.0	32.0	27.5	3.0	0.96 E3	R60GR5680--0--
10.0 μF	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5100--3--
15.0 μF	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5150--4--
22.0 μF	11.0	22.0	41.5	37.5	2.0	0.64 E3	R60GW5220--4--
33.0 μF	13.0	24.0	41.5	37.5	2.0	0.64 E3	R60GW5330--4--
47.0 μF	16.0	28.5	41.5	37.5	2.0	0.64 E3	R60GW5470--4--
68.0 μF	19.0	32.0	41.5	37.5	2.0	0.64 E3	R60GW5680--0--
100.0 μF	20.0	40.0	41.5	37.5	2.0	0.64 E3	R60GW6100--0--
150.0 μF	30.0	45.0	41.5	37.5	2.0	0.64 E3	R60GW6150--0--

Rated Cap.	250Vdc/160Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.10 μF	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3100--3--
0.15 μF	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3150--3--
0.22 μF	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3220--3--
0.33 μF	5.0	11.0	18.0	15.0	12	6.0 E3	R60II 3330--3--
0.47 μF	6.0	12.0	18.0	15.0	12	6.0 E3	R60II 3470--3--
0.68 μF	7.5	13.5	18.0	15.0	12	6.0 E3	R60II 3680--3--
0.68 μF	9.0	12.5	18.0	15.0	12	6.0 E3	R60II 3680--L--
1.0 μF	8.5	14.5	18.0	15.0	12	6.0 E3	R60II 4100--3--
1.0 μF	13.0	12.0	18.0	15.0	12	6.0 E3	R60II 4100--L--
1.5 μF	10.0	16.0	18.0	15.0	12	6.0 E3	R60II 4150--3--
0.47 μF	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 3470--3--
0.68 μF	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 3680--3--
1.0 μF	6.0	15.0	26.5	22.5	8	4.0 E3	R60IN 4100--3--
1.5 μF	7.0	16.0	26.5	22.5	8	4.0 E3	R60IN 4150--3--
2.2 μF	10.0	18.5	26.5	22.5	8	4.0 E3	R60IN 4220--3--
3.3 μF	11.0	20.0	26.5	22.5	8	4.0 E3	R60IN 4330--3--
1.5 μF	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4150--3--
2.2 μF	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4220--3--
3.3 μF	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4330--4--
4.7 μF	9.0	17.0	32.0	27.5	5	2.5 E3	R60IR 4470--4--
6.8 μF	11.0	20.0	32.0	27.5	5	2.5 E3	R60IR 4680--4--
10.0 μF	13.0	22.0	32.0	27.5	5	2.5 E3	R60IR 5100--4--
15.0 μF	14.0	28.0	32.0	27.5	5	2.5 E3	R60IR 5150--4--
22.0 μF	18.0	33.0	32.0	27.5	5	2.5 E3	R60IR 5220--0--
33.0 μF	22.0	37.0	32.0	27.5	5	2.5 E3	R60IR 5330--0--
4.7 μF	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 4470--3--
6.8 μF	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 4680--4--
10.0 μF	11.0	22.0	41.5	37.5	4	2.0 E3	R60IW 5100--4--
15.0 μF	13.0	24.0	41.5	37.5	4	2.0 E3	R60IW 5150--4--
22.0 μF	16.0	28.5	41.5	37.5	4	2.0 E3	R60IW 5220--4--
33.0 μF	19.0	32.0	41.5	37.5	4	2.0 E3	R60IW 5330--4--
47.0 μF	20.0	40.0	41.5	37.5	4	2.0 E3	R60IW 5470--0--
68.0 μF	24.0	44.0	41.5	37.5	4	2.0 E3	R60IW 5680--0--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

**METALLIZED POLYESTER FILM CAPACITOR
 D.C. MULTIPURPOSE APPLICATIONS**
PRODUCT CODE: **R60****WOUND VERSION**

Rated Cap.	400Vdc/200Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
0.015 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2150--3--
0.022 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2220--3--
0.033 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2330--3--
0.047 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2470--3--
0.068 μF	4.0	9.0	13.0	10.0	30.0	24.0 E3	R60MF2680--4--
0.068 μF	5.0	11.0	13.0	10.0	30.0	24.0 E3	R60MF2680--3--
0.10 μF	5.0	11.0	13.0	10.0	30.0	24.0 E3	R60MF3100--4--
0.10 μF	6.0	12.0	13.0	10.0	30.0	24.0 E3	R60MF3100--3--
0.15 μF	6.0	12.0	13.0	10.0	30.0	24.0 E3	R60MF3150--3--
0.022 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI2220--3--
0.047 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI2470--3--
0.068 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI2680--3--
0.10 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI3100--3--
0.15 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI3150--3--
0.22 μF	5.0	11.0	18.0	15.0	20.0	16.0 E3	R60MI3220--4--
0.22 μF	6.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI3220--3--
0.33 μF	7.5	13.5	18.0	15.0	20.0	16.0 E3	R60MI3330--3--
0.33 μF	9.0	12.5	18.0	15.0	20.0	16.0 E3	R60MI3330--L--
0.47 μF	7.5	13.5	18.0	15.0	20.0	16.0 E3	R60MI3470--4--
0.47 μF	8.5	14.5	18.0	15.0	20.0	16.0 E3	R60MI3470--3--
0.47 μF	9.0	12.5	18.0	15.0	20.0	16.0 E3	R60MI3470--L1--
0.47 μF	13.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI3470--L--
0.68 μF	10.0	16.0	18.0	15.0	20.0	16.0 E3	R60MI3680--4--
0.68 μF	11.0	19.0	18.0	15.0	20.0	16.0 E3	R60MI3680--3--
0.68 μF	13.0	12.0	18.0	15.0	20.0	16.0 E3	R60MI3680--L--
1.0 μF	11.0	19.0	18.0	15.0	20.0	16.0 E3	R60MI4100--3--
0.22 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3220--3--
0.33 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3330--3--
0.47 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3470--3--
0.68 μF	6.0	15.0	26.5	22.5	10.0	8.0 E3	R60MN3680--4--
0.68 μF	7.0	16.0	26.5	22.5	10.0	8.0 E3	R60MN3680--3--
1.0 μF	8.5	17.0	26.5	22.5	10.0	8.0 E3	R60MN4100--4--
1.0 μF	10.0	18.5	26.5	22.5	10.0	8.0 E3	R60MN4100--3--
1.5 μF	10.0	18.5	26.5	22.5	10.0	8.0 E3	R60MN4150--4--
1.5 μF	11.0	20.0	26.5	22.5	10.0	8.0 E3	R60MN4150--3--
2.2 μF	13.0	22.0	26.5	22.5	10.0	8.0 E3	R60MN4220--3--
0.68 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR3680--3--
1.0 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR4100--3--
1.5 μF	9.0	17.0	32.0	27.5	8.5	3.4 E3	R60MR4150--4--
2.2 μF	11.0	20.0	32.0	27.5	8.5	3.4 E3	R60MR4220--4--
3.3 μF	13.0	22.0	32.0	27.5	8.5	3.4 E3	R60MR4330--4--
4.7 μF	14.0	28.0	32.0	27.5	8.5	3.4 E3	R60MR4470--4--
6.8 μF	18.0	33.0	32.0	27.5	8.5	3.4 E3	R60MR4680--4--
10.0 μF	22.0	37.0	32.0	27.5	8.5	3.4 E3	R60MR5100--4--
3.3 μF	11.0	22.0	41.5	37.5	6.0	2.4 E3	R60MW4330--3--
4.7 μF	11.0	22.0	41.5	37.5	6.0	2.4 E3	R60MW4470--4--
6.8 μF	13.0	24.0	41.5	37.5	6.0	2.4 E3	R60MW4680--4--
10.0 μF	16.0	28.5	41.5	37.5	6.0	2.4 E3	R60MW5100--4--
15.0 μF	24.0	44.0	41.5	37.5	6.0	2.4 E3	R60MW5150--3--
22.0 μF	24.0	44.0	41.5	37.5	6.0	2.4 E3	R60MW5220--4--
33.0 μF	30.0	45.0	41.5	37.5	6.0	2.4 E3	R60MW5330--4--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

Rated Cap.	630Vdc/220*Vac Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
4700 pF	4.0	9.0	13.0	10.0	40	50 E3	R60PF1470--3--
6800 pF	4.0	9.0	13.0	10.0	40	50 E3	R60PF1680--3--
0.010 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF2100--3--
0.015 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF2150--3--
0.022 μF	4.0	9.0	13.0	10.0	40	50 E3	R60PF2220--4--
0.022 μF	5.0	11.0	13.0	10.0	40	50 E3	R60PF2220--3--
0.033 μF	5.0	11.0	13.0	10.0	40	50 E3	R60PF2330--4--
0.033 μF	6.0	12.0	13.0	10.0	40	50 E3	R60PF2330--3--
0.047 μF	6.0	12.0	13.0	10.0	40	50 E3	R60PF2470--3--
0.033 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI2330--3--
0.047 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI2470--3--
0.068 μF	5.0	11.0	18.0	15.0	25	31 E3	R60PI2680--4--
0.068 μF	6.0	12.0	18.0	15.0	25	31 E3	R60PI2680--3--
0.10 μF	6.0	12.0	18.0	15.0	25	31 E3	R60PI3100--4--
0.10 μF	7.5	13.5	18.0	15.0	25	31 E3	R60PI3100--3--
0.10 μF	9.0	12.5	18.0	15.0	25	31 E3	R60PI3100--L--
0.15 μF	7.5	13.5	18.0	15.0	25	31 E3	R60PI3150--4--
0.15 μF	8.5	14.5	18.0	15.0	25	31 E3	R60PI3150--3--
0.22 μF	8.5	14.5	18.0	15.0	25	31 E3	R60PI3220--4--
0.22 μF	10.0	16.0	18.0	15.0	25	31 E3	R60PI3220--3--
0.33 μF	10.0	16.0	18.0	15.0	25	31 E3	R60PI3330--3--
0.10 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3100--3--
0.15 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3150--3--
0.22 μF	6.0	15.0	26.5	22.5	12	15 E3	R60PN3220--4--
0.22 μF	7.0	16.0	26.5	22.5	12	15 E3	R60PN3220--3--
0.33 μF	7.0	16.0	26.5	22.5	12	15 E3	R60PN3330--5--
0.33 μF	8.5	17.0	26.5	22.5	12	15 E3	R60PN3330--4--
0.33 μF	10.0	18.5	26.5	22.5	12	15 E3	R60PN3330--3--
0.47 μF	10.0	18.5	26.5	22.5	12	15 E3	R60PN3470--4--
0.47 μF	11.0	20.0	26.5	22.5	12	15 E3	R60PN3470--3--
0.68 μF	11.0	20.0	26.5	22.5	12	15 E3	R60PN3680--4--
0.68 μF	13.0	22.0	26.5	22.5	12	15 E3	R60PN3680--3--
0.33 μF	9.0	17.0	32.0	27.5	10	12 E3	R60PR3330--3--
0.47 μF	9.0	17.0	32.0	27.5	10	12 E3	R60PR3470--4--
0.68 μF	11.0	20.0	32.0	27.5	10	12 E3	R60PR3680--4--
1.0 μF	11.0	20.0	32.0	27.5	10	12 E3	R60PR4100--5--
1.5 μF	18.0	33.0	32.0	27.5	10	12 E3	R60PR4150--3--
2.2 μF	18.0	33.0	32.0	27.5	10	12 E3	R60PR4220--4--
3.3 μF	22.0	37.0	32.0	27.5	10	12 E3	R60PR4330--4--
4.7 μF	22.0	37.0	32.0	27.5	10	12 E3	R60PR4470--4--
1.0 μF	11.0	22.0	41.5	37.5	8	9.6 E3	R60PW4100--3--
1.5 μF	11.0	22.0	41.5	37.5	8	9.6 E3	R60PW4150--4--
2.2 μF	13.0	24.0	41.5	37.5	8	9.6 E3	R60PW4220--4--
3.3 μF	16.0	28.5	41.5	37.5	8	9.6 E3	R60PW4330--4--
4.7 μF	19.0	32.0	41.5	37.5	8	9.6 E3	R60PW4470--4--
6.8 μF	20.0	40.0	41.5	37.5	8	9.6 E3	R60PW4680--0--
10.0 μF	24.0	44.0	41.5	37.5	8	9.6 E3	R60PW5100--4--

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**
PRODUCT CODE: **R60****WOUND VERSION**

Rated Cap.	1000Vdc/250Vac* Std dimensions				Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	B	H	L	p			
1000 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1100--0--
1500 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1150--0--
2200 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1220--0--
3300 pF	4.0	9.0	13.0	10.0	60	120 E3	R60QF 1330--0--
4700 pF	5.0	11.0	13.0	10.0	60	120 E3	R60QF 1470--0--
6800 pF	6.0	12.0	13.0	10.0	60	120 E3	R60QF 1680--0--
0.010 μF	5.0	11.0	18.0	15.0	30	60 E3	R60QI 2100--0--
0.015 μF	5.0	11.0	18.0	15.0	30	60 E3	R60QI 2150--3--
0.022 μF	6.0	12.0	18.0	15.0	30	60 E3	R60QI 2220--3--
0.033 μF	7.5	13.5	18.0	15.0	30	60 E3	R60QI 2330--3--
0.033 μF	9.0	12.5	18.0	15.0	30	60 E3	R60QI 2330--L--
0.047 μF	10.0	16.0	18.0	15.0	30	60 E3	R60QI 2470--0--
0.047 μF	13.0	12.0	18.0	15.0	30	60 E3	R60QI 2470--L--
0.068 μF	11.0	19.0	18.0	15.0	30	60 E3	R60QI 2680--0--
0.033 μF	6.0	15.0	26.5	22.5	15	30 E3	R60QN2330--0--
0.047 μF	6.0	15.0	26.5	22.5	15	30 E3	R60QN2470--0--
0.068 μF	7.0	16.0	26.5	22.5	15	30 E3	R60QN2680--3--
0.10 μF	8.5	17.0	26.5	22.5	15	30 E3	R60QN3100--3--
0.15 μF	13.0	22.0	26.5	22.5	15	30 E3	R60QN3150--0--
0.15 μF	9.0	17.0	32.0	27.5	12	24 E3	R60QR3150--3--
0.22 μF	9.0	17.0	32.0	27.5	12	24 E3	R60QR3220--4--
0.33 μF	11.0	20.0	32.0	27.5	12	24 E3	R60QR3330--4--
0.47 μF	13.0	22.0	32.0	27.5	12	24 E3	R60QR3470--4--
0.68 μF	14.0	28.0	32.0	27.5	12	24 E3	R60QR3680--4--
1.00 μF	18.0	33.0	32.0	27.5	12	24 E3	R60QR4100--4--
1.50 μF	22.0	37.0	32.0	27.5	12	24 E3	R60QR4150--4--
0.47 μF	11.0	22.0	41.5	37.5	10	20 E3	R60QW3470--3--
0.68 μF	11.0	22.0	41.5	37.5	10	20 E3	R60QW3680--4--
1.00 μF	13.0	24.0	41.5	37.5	10	20 E3	R60QW4100--4--
1.50 μF	16.0	28.5	41.5	37.5	10	20 E3	R60QW4150--4--
2.20 μF	19.0	32.0	41.5	37.5	10	20 E3	R60QW4220--3--
3.30 μF	24.0	44.0	41.5	37.5	10	20 E3	R60QW4330--0--
4.70 μF	30.0	45.0	41.5	37.5	10	20 E3	R60QW4470--4--

All dimensions are in mm.

Note 1: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V . The pulse characteristic K_0 depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

Note 2: Rated voltages higher than 1000Vdc are available upon request.

* Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 151).

Mechanical version and packaging (Table1)

Internal use

Tolerance: J (±5%); K (±10%); M (±20%)

**METALLIZED POLYESTER FILM CAPACITOR
 D.C. MULTIPURPOSE APPLICATIONS**

 PRODUCT CODE: **R60**
ELECTRICAL CHARACTERISTICS
Rated voltage (V_R): 50Vdc - 63Vdc - 100Vdc - 160Vdc
 - 250Vdc - 400Vdc - 630Vdc - 1000Vdc .

Rated temperature (T_R): +85°C

Temperature derated voltage:

for temperatures between +85°C and +125°C

 a decreasing factor of 1.25% per degree °C on the rated voltage V_R (d.c. and a.c.) has to be applied.

Capacitance range: 1000pF to 220μF

Capacitance values:

E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):

±5% (J); ±10% (K); ±20% (M).

Total self-inductance (L): (lead length ~2mm)

Pitch (mm)	10	15	22.5	27.5	37.5
L(nH) ≈	9	10	18	18	22

Dissipation factor (DF):

 tgδ 10⁻⁴ at +25°C ±5°C

kHz	C≤1μF	C>1μF
1	≤100	≤100
10	≤150	

Insulation resistance:
Test conditions

Temperature: +25°C±5°C

Voltage charge time: 1 min

 Voltage charge: 50 Vdc for $V_R < 100$ Vdc
 100 Vdc for $V_R \geq 100$ Vdc

Performance
For $V_R \leq 100$ Vdc

≥3750 MΩ for C ≤0.33μF (50000 MΩ)*

≥1250 s for C >0.33μF (5000 s)*

For $V_R > 100$ Vdc

≥30000 MΩ for C ≤0.33μF (50000 MΩ)*

≥10000 s for C >0.33μF (17000 s)*

*Typical value

Test voltage between terminations:

 1.6x V_R applied for 2 s at +25°C±5°C

TEST METHOD AND PERFORMANCE
Damp heat, steady state:
Test conditions

Temperature: +40°C±2°C

Relative humidity (RH): 93% ±2%

Test duration: 56 days

Performance

Capacitance change |ΔC/C|: ≤5%

 DF change (Δtgδ): ≤50x10⁻⁴ at 1kHz

Insulation resistance: ≥50% of initial limit.

Endurance:
Test conditions

Temperature: +105°C±2°C

Test duration: 2000 h

 Voltage applied: 1.25x V_C
Performance

Capacitance change |ΔC/C|: ≤5%

 DF change (Δtgδ): ≤50x10⁻⁴ at 10kHz for C≤1μF

 ≤30x10⁻⁴ at 1kHz for C>1μF

Insulation resistance: ≥50% of initial limit.

Resistance to soldering heat:
Test conditions

Solder bath temperature: +260°C±5°C

Dipping time (with heat screen): 10 s ±1 s

Performance

Capacitance change |ΔC/C|: ≤2%

 DF change (Δtgδ): ≤50x10⁻⁴ at 10kHz for C≤1μF

 ≤30x10⁻⁴ at 1kHz for C>1μF

Insulation resistance: ≥ initial limit.

Long term stability (after two years):

Storage: standard environmental conditions (see page 12).

Performance

Capacitance change |ΔC/C|: ≤3% for C ≤0.1μF

≤2% for C >0.1μF

RELIABILITY:

Reference MIL HDB 217

Application conditions:

Temperature: +40°C±2°C

 Voltage: 0.5x V_R

Failure rate: ≤5 FIT

 (1 FIT = 1x10⁻⁹ failures/componentsxh)

Failure criteria:








Short or open circuit

Capacitance change |ΔC/C|: >10%

DF change (Δtgδ): >2xinitial limit.

Insulation resistance: <0.005xinitial limit.

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / $T_h \leq 40^\circ\text{C}$)

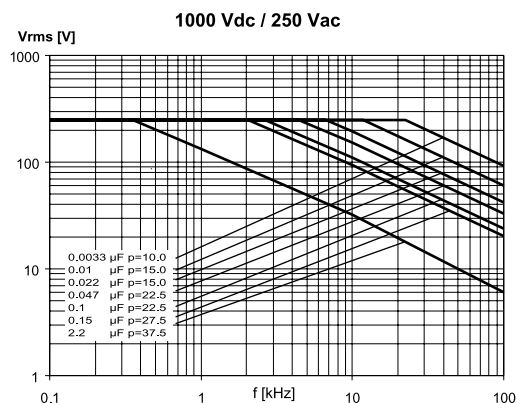
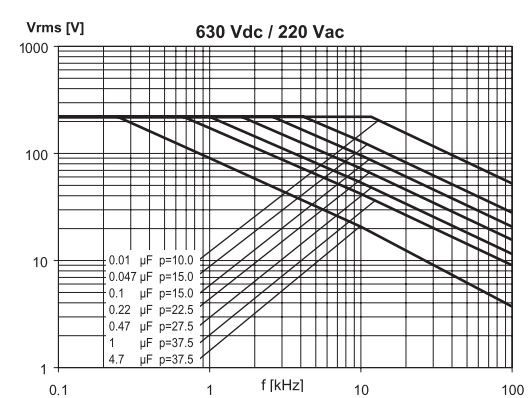
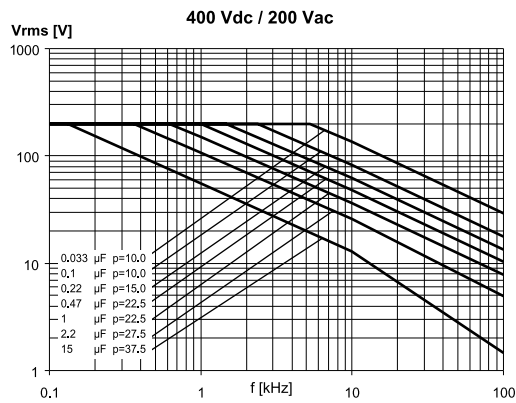
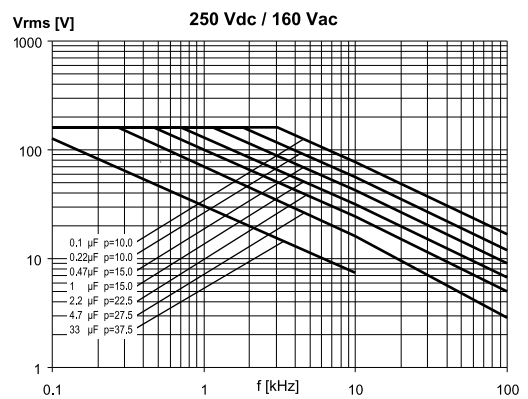
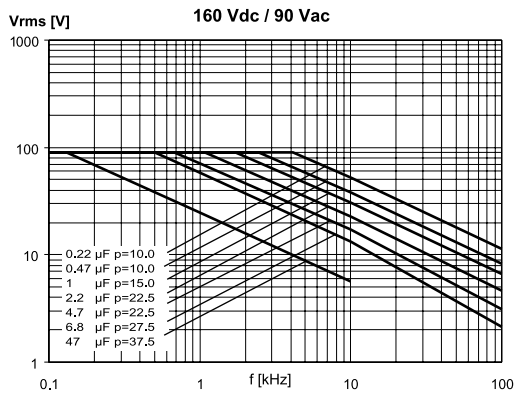
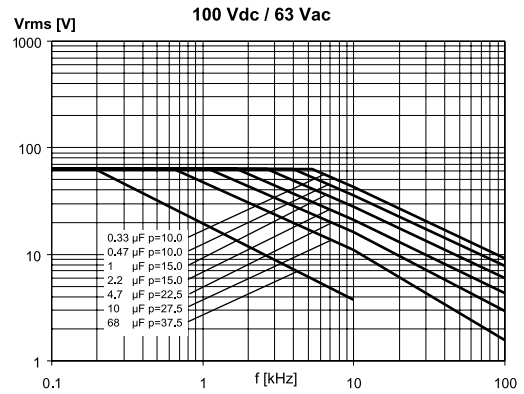
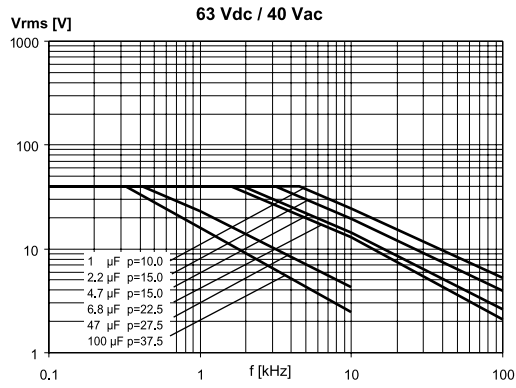


Note: p (pitch) in mm.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **R60**

MAX. CURRENT ($I_{r.m.s.}$) VERSUS FREQUENCY (sinusoidal wave-form / $T_h \leq 40^\circ\text{C}$)

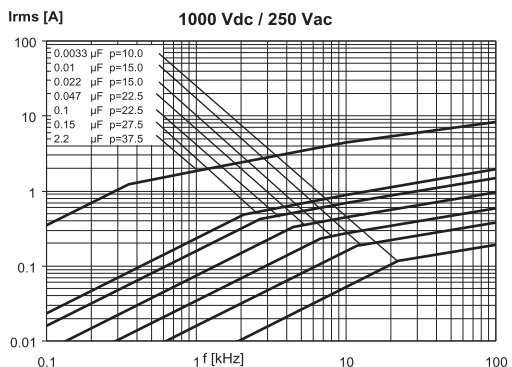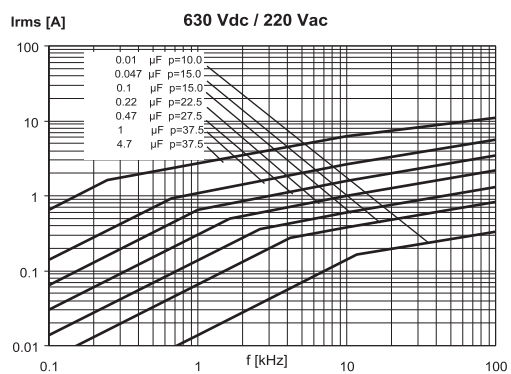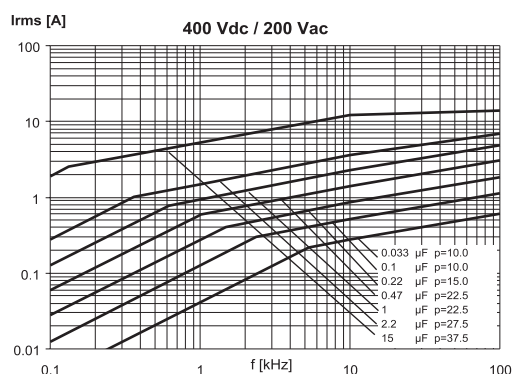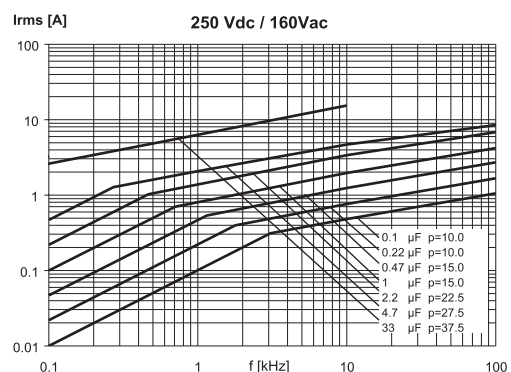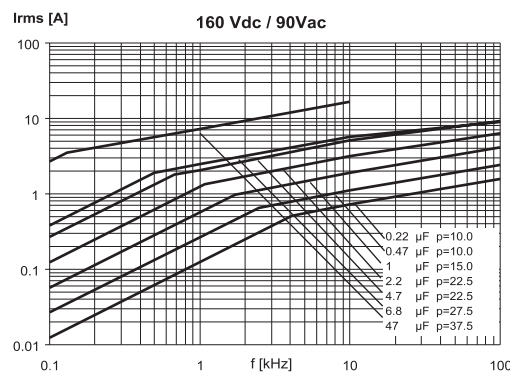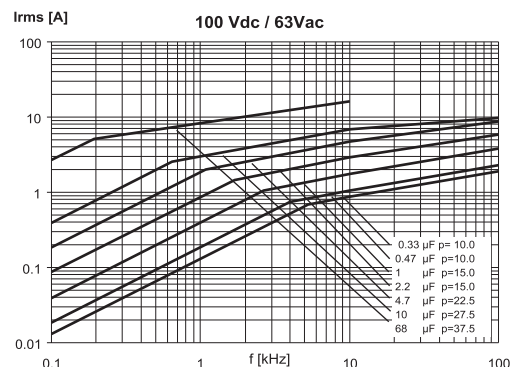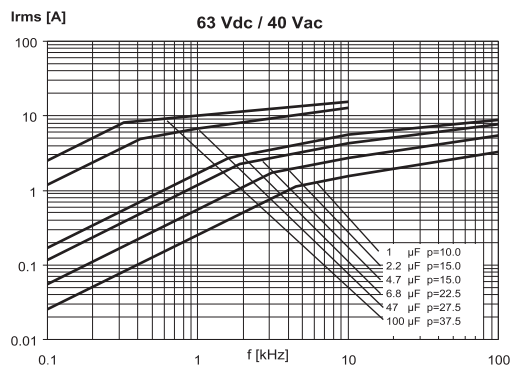

Note: p (pitch) in mm.

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.