


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |               |         |     |      |
|-----|------|-----------|-----|---------------|---------|-----|------|
| GP  | 00   | P         | LTR | DESCRIPTION   | DATE    | DWN | APVD |
|     |      | H1        |     | ECR-11-025464 | 16DEC11 | RK  | BVH  |

NOTES:



- ⚠ PITCH TOLERANCE TO BE  $\pm .18[.007]$  FOR 1.27[.050] PITCH JUMPERS &  $\pm .25[.010]$  FOR ALL REMAINING PITCHES. TOLERANCE TO BE NON CUMULATIVE OVER GAUGE LENGTH.
- ⚠ 11.92-152.40[.500-6.000] ARE STANDARD LENGTHS. JUMPERS ARE AVAILABLE IN INCREMENTS OF 2.50[.10] PLUS 6.35[.25] AND 19.05[.75].
- ⚠ DELETED
- ⚠ FOR CONDUCTOR PITCH 7 (2mm), ON PAGE 2 & 3, DIMENSION "B" IS 2.00[.079]
- ⚠ SPECIAL PIN LENGTHS ARE AVAILABLE FOR JUMPERS WITH A PIN CONFIGURATION OF "A" OR "B" ON LENGTHS OF UP TO 609.6[24.0] IN 2.54[.100] & 5.08[.200] PITCH VARIANTS ONLY BY ADDING THE FOLLOWING SUFFIXES:

| SUFFIX | PEN LENGTH  | TOLERANCE                    |
|--------|-------------|------------------------------|
| V1     | 2.85 (.112) | $\pm .305$<br>[ $\pm .012$ ] |
| V2     | 3.40 (.134) |                              |
| V3     | 4.10 (.161) |                              |
| V4     | 6.50 (.256) |                              |
| V5     | 3.10 (.122) |                              |
| V6     | 2.81 (.150) |                              |
| V7     | 4.50 (.177) |                              |
| V8     | 2.00 (.079) |                              |
| V9     | TBD         |                              |
| V10    | .76 (.030)  |                              |
| V11    | 2.41 (.095) |                              |

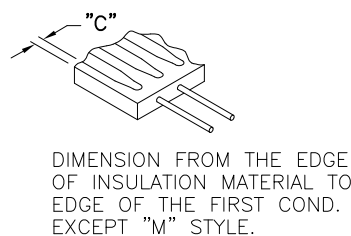

6. RECOMMENDED PCB HOLE DRILLING DETAILS ARE AS FOLLOWS:-

| PITCH A     | $\phi G$   |
|-------------|------------|
| 1.27 (.050) | .70 (.028) |
| 1.90 (.075) | .80 (.031) |
| 2.54 (.100) | .95 (.037) |
| 3.18 (.125) | .95 (.037) |
| 3.81 (.150) | .95 (.037) |
| 5.08 (.200) | .95 (.037) |

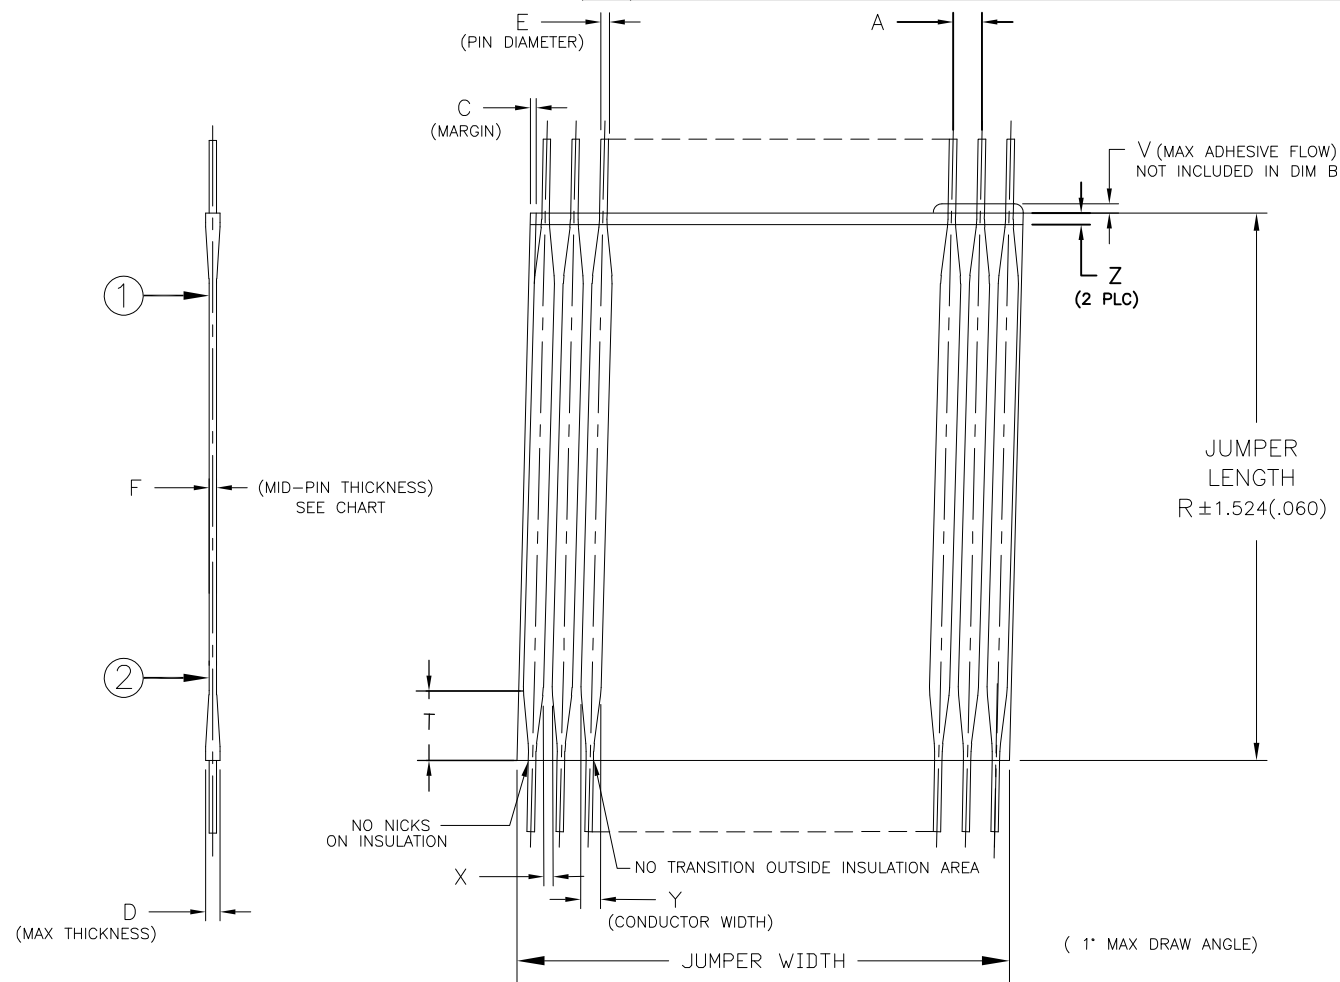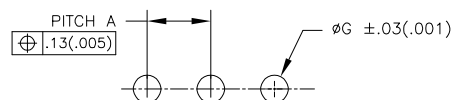

| JUMPER LENGTH   | PITCH (NOMINAL) | TRANSITION MAX | MAX/MIN MARGIN            | $\Delta$ PIN DIAMETER       | WIRE GAUGE (AWG) | MIN/MAX No OF CONDUCTORS | MAXIMUM ADHESIVE FLOW | MIN GAP BETWEEN CONDUCTORS | CONDUCTOR WIDTH         | MAXIMUM INSULATION MISMATCH | MAX THICKNESS |
|---|-----------------|----------------|---------------------------|-----------------------------|------------------|--------------------------|-----------------------|----------------------------|-------------------------|-----------------------------|---------------|
| R $\Delta$  | A $\Delta$      | T              | C                         | E                           | -                | -                        | V                     | X                          | Y                       | Z                           | D             |
| 11.93 (.50) TO 863.6 (30.00) IN STEPS OF 2.50 (.10) PLUS 6.35 (.25) AND 19.05 (.75) | 1.00 (0.039)    | 4.32 [.170]    | 0.35 (0.014) 0.17 (.007)  | 0.330 (.0130) 0.317 (.0125) | 28               | 2-70                     | 0.38 (0.015)          | 0.13 (0.009)               | 0.76 (.030) 0.56 (.022) | .76 (.030)                  | .64           |
|   | 1.25 (0.049)    | 4.32 [.170]    | 0.50 (0.020) 0.17 (0.007) | 0.330 (.0130) 0.317 (.0125) | 28               | 2-70                     | 0.38 (0.015)          | 0.25 (0.010)               | 0.89 (.035) 0.64 (.025) | .76 (.030)                  | .64           |
|   | 1.27 (0.050)    | 4.32 [.170]    | 0.50 (0.020) 0.17 (0.007) | 0.330 (.0130) 0.317 (.0125) | 28               | 2-70                     | 0.38 (0.015)          | 0.25 (0.010)               | 0.89 (.035) 0.64 (.025) | .76 (.030)                  | .64           |
|   | 2.00 (0.079)    | 5.08 [.200]    | 0.70 (0.028) 0.25 (0.010) | 0.416 (.0164) 0.400 (.0157) | 26               | 2-50                     | 0.38 (0.015)          | 0.38 (0.015)               | 1.14 (.045) 0.89 (.035) | .76 (.030)                  | .84           |
|   | 1.90 (0.075)    | 5.08 [.200]    | 0.70 (0.028) 0.25 (0.010) | 0.416 (.0164) 0.400 (.0157) | 26               | 2-50                     | 0.38 (0.015)          | 0.38 (0.015)               | 1.14 (.045) 0.89 (.035) | .76 (.030)                  | .84           |
|   | 2.54 (0.100)    | 6.35 [.250]    | 0.80 (0.031) 0.25 (0.010) | 0.526 (.0207) 0.505 (.0199) | 24               | 2-50                     | 0.51 (0.020)          | 0.51 (0.020)               | 1.52 (.060) 1.27 (.050) | .76 (.030)                  | .84           |
|   | 3.18 (0.125)    | 6.35 [.250]    | 1.00 (0.039) 0.25 (0.010) | 0.526 (.0207) 0.505 (.0199) | 24               | 2-25                     | 0.51 (0.020)          | 0.51 (0.020)               | 1.52 (.060) 1.27 (.050) | .76 (.030)                  | .84           |
|   | 3.81 (0.150)    | 6.35 [.250]    | 1.00 (0.039) 0.25 (0.010) | 0.526 (.0207) 0.505 (.0199) | 24               | 2-20                     | 0.51 (0.020)          | 0.51 (0.020)               | 1.52 (.060) 1.27 (.050) | .76 (.030)                  | .84           |
|   | 5.08 (0.200)    | 6.35 [.250]    | 1.00 (0.039) 0.25 (0.010) | 0.526 (.0207) 0.505 (.0199) | 24               | 2-15                     | 0.51 (0.020)          | 0.51 (0.020)               | 1.52 (.060) 1.27 (.050) | .76 (.030)                  | .84           |

- ⚠ BEND RADIUS TO APPLY ONLY IN THE FLAT SECTION OF JUMPER BETWEEN THE CONDUCTOR TRANSITION AREAS.
- ⚠ PER 108-2135.
- 9. TOOL MARKS PERMISSIBLE ON BENDS. NO EXPOSED COPPER.
- ⚠ PIN DIAMETER SPECIFIED NOT APPLICABLE IN BENDING AREA OF PIN, DUE TO NORMAL DEFORMATION OF BENDING PROCESS.
- ⚠ REFER TO RELEVANT MATERIAL SPECIFICATIONS.

| F - MID POINT THICKNESS BETWEEN PT 1 & PT 2 | MINIMUM     | MAXIMUM     |
|---|-------------|-------------|
|   | NOMEX®      | .152 [.006] |
| POLYESTER                                   | .152 [.006] | .305 [.012] |
| KAPTON®                                     | .102 [.004] | .254 [.010] |
| TEFLON®                                     | .305 [.012] | .533 [.021] |

12. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

Nomex®, Teflon® and Kapton® are trademarks of E. I. DuPont de Nemours.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. SCHWARTZ 28FEB01  
 CHK E. FOX 28FEB01  
 APVD E. FOX 28FEB01

STE TE Connectivity

FLEXSTRIP PIN CONFIGURATIONS, GENERIC

PRODUCT SPEC  
 APPLICATION SPEC

SIZE A3 CAGE CODE 00779 DRAWING NO C-1474339 RESTRICTED TO -

MATERIAL - FINISH - WEIGHT -

CUSTOMER DRAWING SCALE N.T.S. SHEET 1 OF 4 REV H1



**MANUFACTURING NOTE:**

**MINIMUM GAP BETWEEN STRIPS**

|        |          |
|--------|----------|
| SK/A/Z | .75 INCH |
| LP     | 1.1 INCH |

**MINIMUM CONDUCTOR COUNT PER STRIP FOR LINE JOBS**

| PITCH         | CONDUCTOR |
|---------------|-----------|
| 1 1.27 (.050) | 60        |
| 2 2.54 (.100) | 60        |
| 3 3.18 (.125) | 60        |
| 4 3.81 (.150) | 50        |
| 5 5.08 (.200) | 40        |
| 6 1.91 (.075) | 60        |
| 7 2.0 (.078)  | 60        |
| 8 1.24 (.049) | 60        |
| 9 1.0 (.039)  | 80        |



Nomex®, Teflon® and Kapton® are trademarks of E. I. DuPont de Nemours.

THIS DRAWING IS A CONTROLLED DOCUMENT.

| DIMENSIONS: MM [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
|-------------------------|--|
| 0 PLC                   | ± -                                    |
| 1 PLC                   | ± -                                    |
| 2 PLC                   | ± -                                    |
| 3 PLC                   | ± -                                    |
| 4 PLC                   | ± -                                    |
| ANGLES                  | ± 1/2°                                 |
| MATERIAL                | FINISH                                 |

|                  |              |                     |   |            |               |
|------------------|--------------|---------------------|---|------------|---------------|
| DWN J. SCHWARTZ  | 28FEB01      | <br>TE Connectivity | NAME<br>FLEXSTRIP PIN CONFIGURATIONS, GENERIC |            |               |
| CHK E. FOX       | 28FEB01      |                     |   |            |               |
| APVD E. FOX      | 28FEB01      |                     |   |            |               |
| PRODUCT SPEC     |              |                     |   |            |               |
| APPLICATION SPEC |              | SIZE                | CAGE CODE                                     | DRAWING NO | RESTRICTED TO |
| WEIGHT -         |              | A3                  | 00779   | C-1474339  | -             |
| CUSTOMER DRAWING | SCALE N.T.S. | SHEET 2 OF 4        | REV H1  |            |               |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC GP DIST 00

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| - | -   | SEE SHEET 1 | -    | -   | -    |



**Z BEND**  
DIMENSIONS  
24 AWG: .034 ±.004  
26 AWG: .028 ±.004  
28 AWG: .022 ±.004

**SPECIAL FLEXSTRIP BENDS**  
SPECIAL FLEXSTRIP BENDS  
E THRU R, AND Z MAY APPLY TO EITHER  
LEFT OF RIGHT SIDE

Nomex®, Teflon® and Kapton® are trademarks of E. I. DuPont de Nemours.

**SPECIAL JUMPERS**  
SMART DESCRIPTION

FS N - 1 3.25 A G - 20 V1

( SEE NOTE 5 )

FLEXSTRIP PRODUCT CODE

INSULATION MATERIAL:  
N - NOMEX®  
P - POLYESTER  
T - TEFLON®  
K - KAPTON®

CONDUCTOR PITCH:  
1 - 1.27(.050)  
2 - 2.54(.100)  
3 - 3.18(.125)  
4 - 3.81(.150)  
5 - 5.08(.200)  
6 - 1.90(.075)  
7 - 2.00(.078)  
8 - 1.25(.049)  
9 - 1.00(.039)

INSULATION LENGTH: (in inches)  
.50 MIN. - 30.0 MAX.  
IN .10 INCREMENTS PLUS .25 AND .75

SPECIAL PIN LENGTH  
V1 - 2.84(.112)  
V2 - 3.40(.134)  
V3 - 4.09(.161)  
V4 - 6.50(.256)  
V5 - 3.01(.122)  
V6 - 3.81(.150)  
V7 - 4.50(.177)  
V8 - 2.01(.079)  
V9 - TBD  
V10 - .76 (.030)  
V11 - 2.41(.095)

NUMBER OF CONDUCTORS (SEE MAX./MIN. PAGE 1)

PIN ARRANGEMENT (RIGHT)

PIN ARRANGEMENT (LEFT)

| CONDUCTOR PITCH  | BENDS AVAILABLE |
|------------------|-----------------|
| 1 - 1.27/(.050)  | E,F,G,H,J,K,L   |
| 2 - 2.54/(.100)  | E,F,G,H,J,K,L   |
| 3 - 3.18/(.125)  | E               |
| 4 - 3.81/(.150)  | E               |
| 5 - 5.08/(.200)  | E               |
| 6 - 1.91/(.075)  | E,F,G,H,J,K,L   |
| 7 - 2.00/(.0787) | E,F,G,H,J,K,L   |
| 8 - 1.25/(.049)  | E               |
| 9 - 1.00/(.039)  | E               |

| E THRU L BEND         |
|-----------------------|
| "A" DIM               |
| 3.18±0.76/(.125±.030) |
| "B" DIM               |
| 2.54±0.25/(.100±.010) |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| DIMENSIONS:<br>MM [INCHES] | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: |
|----------------------------|---|
|                            | 0 PLC ± -                                 |
|                            | 1 PLC ± -                                 |
|                            | 2 PLC ± -                                 |
|                            | 3 PLC ± -                                 |
|                            | 4 PLC ± -                                 |
|                            | ANGLES ± 1/2°                             |
| MATERIAL                   | FINISH                                    |

|                  |             |         |
|------------------|-------------|---------|
| DWN              | J. SCHWARTZ | 28FEB01 |
| CHK              | E. FOX      | 28FEB01 |
| APVD             | E. FOX      | 28FEB01 |
| PRODUCT SPEC     | -           | -       |
| APPLICATION SPEC | -           | -       |
| WEIGHT           | -           | -       |
| CUSTOMER DRAWING |             |         |

|                 |           |                                       |               |               |  |
|-----------------|-----------|---------------------------------------|---------------|---------------|--|
| TE Connectivity |           | NAME                                  |               | RESTRICTED TO |  |
|                 |           | FLEXSTRIP PIN CONFIGURATIONS, GENERIC |               |               |  |
| SIZE            | CAGE CODE | DRAWING NO                            | RESTRICTED TO |               |  |
| A3              | 00779     | C-1474339                             | -             |               |  |
| SCALE           |           | SHEET                                 | REV           |               |  |
| N.T.S.          |           | 3 OF 4                                | H1            |               |  |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

|           |            |             |      |     |
|-----------|------------|-------------|------|-----|
| LOC<br>GP | DIST<br>00 | REVISIONS   |      |     |
| P         | LTR        | DESCRIPTION | DATE | DWN |
|           |            | SEE SHEET 1 | -    | -   |

|   |                  |  |  |  |  |  |  |  |  |  |
|---|------------------|--|--|--|--|--|--|--|--|--|
| NORMAL CONDUCTOR PITCH  |                  | 1.00<br>(.039)   | 1.25<br>(.049)   | 1.27<br>(.050)   | 1.90<br>(.075)   | 2.00<br>(.078)   | 2.54<br>(.100)   | 3.18<br>(.125)   | 3.81<br>(.150)   | 5.08<br>(.200)   |
| WIRE GAUGE  |                  | AWG 28   | AWG 28   | AWG 28   | AWG 26   | AWG 26   | AWG 24   | AWG 24   | AWG 24   | AWG 24   |
| NOMINAL WIRE DIAMETER   |                  | .32(.0126)   | .32(.0126)   | .32(.0126)   | .40(.0159)   | .40(.0159)   | .51(.0201)   | .51(.0201)   | .51(.0201)   | .51(.0201)   |
| CURRENT RATING  |                  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| VOLTAGE RATING  |                  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| MAX NUMBER OF CONDUCTORS PER JUMPER                             |                  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| MIN BREAKDOWN VOLTAGE @ 1 MIN                                   |                  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| INSULATION RESISTANCE (GND. SIG. GND) 305 (12") SAMPLE @ 500VDC | P<br>N<br>T<br>K | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| CAPACITANCE (pf / 50.8 (12") LENGTH) (GND, SIG, GND) (AVERAGE)  | P<br>N<br>T<br>K | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| CHARACTERISTIC IMPEDANCE (GND. SIG. GND) (AVERAGE)              | P<br>N<br>T<br>K | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  | 8  |
| APPLICATION TEMP RANGE (C°) (FOR SOLDERING)                     | P<br>N<br>T<br>K | 200 / 4 sec<br>200 / 4 sec<br>240 / 4 sec<br>240 / 4 sec   | 200 / 4 sec<br>200 / 4 sec<br>240 / 4 sec<br>240 / 4 sec | 200 / 4 sec<br>200 / 4 sec<br>240 / 4 sec<br>240 / 4 sec | 200 / 4 sec<br>200 / 4 sec<br>240 / 4 sec<br>240 / 4 sec | 200 / 4 sec<br>200 / 4 sec<br>240 / 4 sec<br>240 / 4 sec | 250 / 4 sec<br>250 / 4 sec<br>260 / 5 sec<br>260 / 5 sec | 250 / 4 sec<br>250 / 4 sec<br>260 / 5 sec<br>260 / 5 sec | 250 / 4 sec<br>250 / 4 sec<br>260 / 5 sec<br>260 / 5 sec | 250 / 4 sec<br>250 / 4 sec<br>260 / 5 sec<br>260 / 5 sec |
| OPERATING TEMPERATURE (C°)                                      | P<br>N<br>T<br>K | -40 to 105 (For all Conductor Pitches)<br>-40 to 125 (For all Conductor Pitches)<br>-40 to 150 (For all Conductor Pitches)<br>-40 to 150 (For all Conductor Pitches)                                     |  |  |  |  |  |  |  |  |
| MINIMUM BEND RADIUS   | P<br>N<br>T<br>K | 3.18mm (For all Conductor Pitches)<br>3.18mm (For all Conductor Pitches)<br>3.18mm (For all Conductor Pitches)<br>3.18mm (For all Conductor Pitches)   |  |  |  |  |  |  |  |  |
| UL STYLE NUMBER   | P<br>N<br>T<br>K | 2639 (For all Conductor Pitches .100 and above)<br>5456 (For all Conductor Pitches .100 and above)<br>2928 (For all Conductor Pitches .100 and above)<br>2927 (For all Conductor Pitches .100 and above) |  |  |  |  |  |  |  |  |

| ABR. | MATERIAL    | SPECIFICATION |
|------|-------------|---------------|
|      | COPPER WIRE | 100-1577      |
| P    | POLYESTER   | 100-1575      |
| N    | NOMEX®      | 100-1758      |
| T    | TEFLON®     | 100-1574      |
| K    | KAPTON®     | 100-1576      |

Nomex®, Teflon® and Kapton® are trademarks of E. I. DuPont de Nemours.

|  |  |                               |   |                    |
|--|--|-------------------------------|---|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.   |  | DWN<br>J. SCHWARTZ<br>28FEB01 |  TE Connectivity |                    |
|  |  | CHK<br>E. FOX<br>28FEB01      |   |                    |
| DIMENSIONS: MM [INCHES]  |  | APVD<br>E. FOX<br>28FEB01     | NAME<br>FLEXSTRIP PIN CONFIGURATIONS, GENERIC   |                    |
|                                     |  | PRODUCT SPEC                  | -   |                    |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± 1/2° |  | APPLICATION SPEC              | -   |                    |
| MATERIAL   |  | WEIGHT                        | SIZE<br>A3  | CAGE CODE<br>00779 |
|  |  |                               | DRAWING NO<br>C-1474339   | RESTRICTED TO      |
| CUSTOMER DRAWING   |  |                               | SCALE<br>N.T.S.   | SHEET<br>4 OF 4    |
|  |  |                               | REV<br>H1   |                    |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.