

**RoHS SIDACtor® Series - SMA**



**Agency Approvals**

| Agency | Agency File Number |
|--------|--------------------|
|        | E133080            |

**Schematic Symbol**



**Description**

SIDACtor® SMA Series are designed to protect baseband equipment such as phones, faxes, modems, line cards, CPE and DSL from damaging overvoltage transients.

The series provides a surface mount solution that enables equipment to comply with global regulatory standards.

**Features and Benefits**

- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- Fails short circuit when surged in excess of ratings
- Low capacitance

**Applicable Global Standards**

- TIA-968-A\*
- TIA-968-B\*
- ITU K.20/21 Enhanced Level\*
- ITU K.20/21 Basic Level
- GR 1089 Inter-building\*
- GR 1089 Intra-building
- IEC 61000-4-5\*
- YD/T 1082
- YD/T 993
- YD/T 950

\* Line impedance required to pass operationally

**Electrical Characteristics**

| Part Number  | Marking | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_s$<br>@ 100V/ $\mu s$ | $I_H$  | $I_s$  | $I_T$ | $V_T$<br>@ $I_T=2.2$ Amps | Capacitance<br>@ 1MHz, 2V bias |        |
|--------------|---------|---------------------------------|--------------------------|--------|--------|-------|---------------------------|--------------------------------|--------|
|              |         | V min                           | V max                    | mA min | mA max | A max | V max                     | pF min                         | pF max |
| P0080S1ALRP  | P-8A    | 6                               | 25                       | 50     | 800    | 2.2   | 4                         | 25                             | 35     |
| P1800S1ALRP* | P18A    | 170                             | 220                      | 150    | 800    | 2.2   | 4                         | 15                             | 50     |
| P2300S1ALRP* | P23A    | 190                             | 260                      | 150    | 800    | 2.2   | 4                         | 15                             | 50     |
| P2600S1ALRP* | P26A    | 220                             | 300                      | 150    | 800    | 2.2   | 4                         | 15                             | 50     |
| P3100S1ALRP  | P31A    | 275                             | 350                      | 150    | 800    | 2.2   | 4                         | 15                             | 50     |
| P3500S1ALRP* | P35A    | 320                             | 400                      | 150    | 800    | 2.2   | 4                         | 15                             | 50     |

Notes:  
 - Absolute maximum ratings measured at  $T_a=25^\circ C$  (unless otherwise noted).  
 - Devices are bi-directional (unless otherwise noted).  
 - Parts with "\*" are under development

**Surge Ratings**

| Series | $I_{PP}$             |                   |                     |                     |                     |                    |                     |                      |                     | $I_{TSM}$<br>50/60 Hz | di/dt             |
|--------|----------------------|-------------------|---------------------|---------------------|---------------------|--------------------|---------------------|----------------------|---------------------|-----------------------|-------------------|
|        | 0.2x310 <sup>1</sup> | 2x10 <sup>1</sup> | 8x20 <sup>1</sup>   | 10x160 <sup>1</sup> | 10x560 <sup>1</sup> | 5x320 <sup>1</sup> | 10x360 <sup>1</sup> | 10x1000 <sup>1</sup> | 5x310 <sup>1</sup>  |                       |                   |
|        | 0.5x700 <sup>2</sup> | 2x10 <sup>2</sup> | 1.2x50 <sup>2</sup> | 10x160 <sup>2</sup> | 10x560 <sup>2</sup> | 9x720 <sup>2</sup> | 10x360 <sup>2</sup> | 10x1000 <sup>2</sup> | 10x700 <sup>2</sup> |                       |                   |
|        | A min                | A min             | A min               | A min               | A min               | A min              | A min               | A min                | A min               | A min                 | Amps/ $\mu$ s max |
| A      | 20                   | 150               | 150                 | 90                  | 50                  | 75                 | 75                  | 50                   | 75                  | 20                    | 500               |

Notes:

- 1 Current waveform in  $\mu$ s
- 2 Voltage waveform in  $\mu$ s

- Peak pulse current rating ( $I_{pp}$ ) is repetitive and guaranteed for the life of the product.
- $I_{pp}$  ratings applicable over temperature range of -40°C to +85°C
- The device must initially be in thermal equilibrium with -40°C  $\leq$  T<sub>J</sub>  $\leq$  +150°C


**Thermal Considerations**

| Package  | Symbol           | Parameter                               | Value       | Unit |
|--|------------------|---|-------------|------|
|  DO-214AC | T <sub>J</sub>   | Operating Junction Temperature Range    | -40 to +150 | °C   |
|  | T <sub>S</sub>   | Storage Temperature Range               | -65 to +150 | °C   |
|  | R <sub>θJA</sub> | Thermal Resistance: Junction to Ambient | 90          | °C/W |

**V-I Characteristics**




**t<sub>r</sub> x t<sub>d</sub> Pulse Waveform**

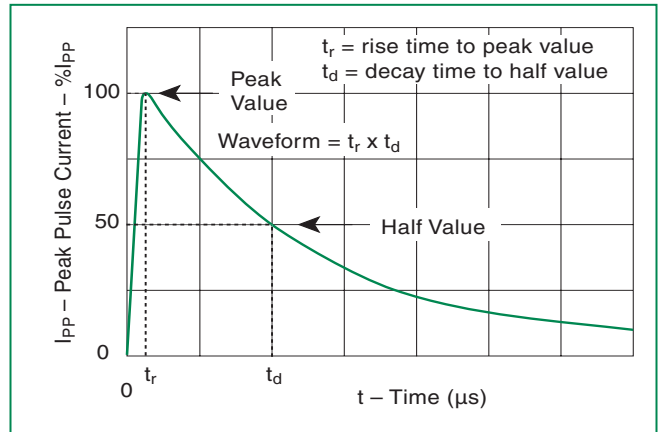

**Normalized V<sub>S</sub> Change vs. Junction Temperature**




**Normalized DC Holding Current vs. Case Temperature**

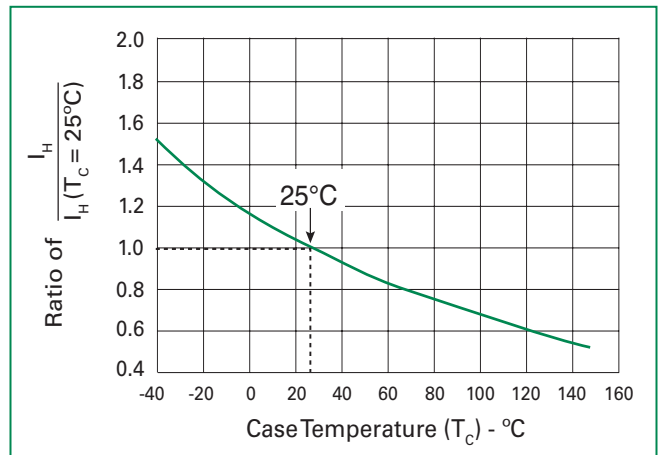

**Soldering Parameters**

|  |                                    |                               |
|--|------------------------------------|-------------------------------|
| Reflow Condition                                       |                                    | Pb-Free assembly (see Fig. 1) |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | +150°C                        |
|  | - Temperature Max ( $T_{s(max)}$ ) | +200°C                        |
|  | - Time (Min to Max) ( $t_s$ )      | 60-180 secs.                  |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/sec. Max.                 |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/sec. Max.                 |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | +217°C                        |
|  | - Temperature ( $t_L$ )            | 60-150 secs.                  |
| Peak Temp ( $T_p$ )                                    |                                    | +260(+0/-5)°C                 |
| Time within 5°C of actual PeakTemp ( $t_p$ )           |                                    | 30 secs. Max.                 |
| Ramp-down Rate   |                                    | 6°C/sec. Max.                 |
| Time 25°C to Peak Temp ( $T_p$ )                       |                                    | 8 min. Max.                   |
| Do not exceed  |                                    | +260°C                        |

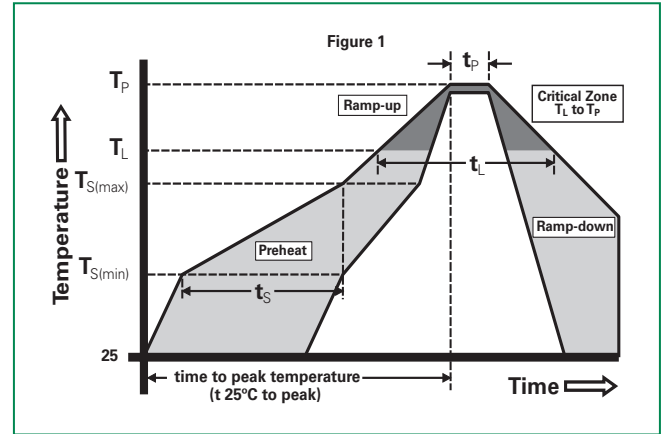

**Physical Specifications**

|                        |   |
|------------------------|---|
| <b>Lead Material</b>   | Copper Alloy  |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated   |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |


**Environmental Specifications**

|   |  |
|---|--|
| <b>High Temp Voltage Blocking</b>       | 80% Rated $V_{DRM}$ ( $V_{AC Peak}$ ) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>                     | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104                  |
| <b>Biased Temp &amp; Humidity</b>       | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101   |
| <b>High Temp Storage</b>                | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101   |
| <b>Low Temp Storage</b>                 | -65°C, 1008 hrs.   |
| <b>Thermal Shock</b>                    | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106                |
| <b>Autoclave (Pressure Cooker Test)</b> | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102  |
| <b>Resistance to Solder Heat</b>        | +260°C, 30 secs. MIL-STD-750 (Method 2031)   |
| <b>Moisture Sensitivity Level</b>       | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1  |

**Part Numbering**



**Part Marking**

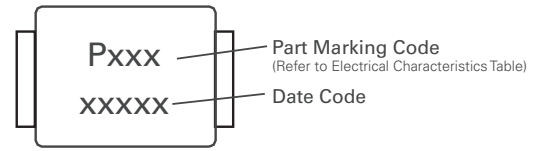

**Dimensions**

**DO-214AC (SMA)**




| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.049  | 0.065 | 1.250       | 1.650 |
| B          | 0.157  | 0.177 | 3.990       | 4.500 |
| C          | 0.100  | 0.110 | 2.540       | 2.790 |
| D          | 0.078  | 0.090 | 1.980       | 2.290 |
| E          | 0.030  | 0.060 | 0.780       | 1.520 |
| F          | -      | 0.008 | -           | 0.203 |
| G          | 0.194  | 0.208 | 4.930       | 5.280 |
| H          | 0.006  | 0.012 | 0.152       | 0.305 |
| I          | 0.070  | -     | 1.800       | -     |
| J          | 0.082  | -     | 2.100       | -     |
| K          | -      | 0.090 | -           | 2.300 |
| L          | 0.082  | -     | 2.100       | -     |

**Packing Options**

| Package Type | Description                                | Packing Options Quantity | Added Suffix | Industry Standard |
|--------------|--|--------------------------|--------------|-------------------|
| S1           | DO-214AC Tape & Reel Pack<br>12mm/13" tape | 5000                     | RP           | EIA-481           |

**Tape and Reel Specification – DO-214AC**

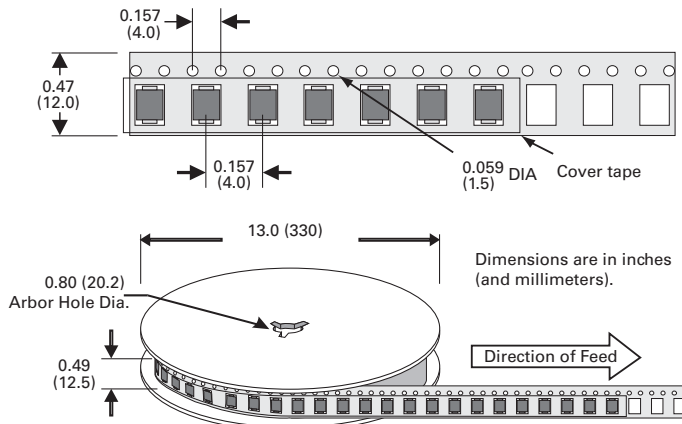



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.