

SMD ONE PORT 915 MHz SAW RESONATOR

ASR915E



RoHS
Compliant



5 x 5 x 1.35mm

STANDARD SPECIFICATIONS:

CHARACTERISTICS		UNIT	MIN.	TYP.	MAX.
Center Frequency F_0		MHz	914.85	915.00	915.15
Tolerance from F_0		KHz		± 150	
Insertion Loss		dB	-	1.5	3.0
Quality Factor	Unloaded	-		45,000	
	50 Ω loaded			2,100	
Temperature Stability	Turnover Temperature	$^{\circ}\text{C}$		39.0	
	Turnover Frequency	KHz		$F_0 + 2.7$	
	Freq. Temp. Coefficient	ppm/ $^{\circ}\text{C}^2$		0.032	
Frequency Aging		ppm/year		± 10	
DC Insulation Resistance		M Ω	1.0		
RF Equivalent RLC Model	Motional Resistance R_1	Ω		28.0	40
	Motional Inductance L_1	μH		46.8	
	Motional Capacitance C_1	fF		3.0	
	Shunt Capacitance C_0	pF	1.0	1.3	1.6
Operating temp.		$^{\circ}\text{C}$	-40°C to $+85^{\circ}\text{C}$		
Storage temp.		$^{\circ}\text{C}$	-45°C to $+85^{\circ}\text{C}$		
Max. Rating	DC voltage	V	± 10		
RF Power Dissipation		dBm	0		

Data measured with: Source Impedance: $Z_s = 50\Omega$, Load Impedance: $Z_L = 50\Omega$, $T_A = 25^{\circ}\text{C}$


Electrostatic Sensitive Device. Handle with precaution.

MARKING:


- 915R (915 Frequency in MHz)
- A ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004 X: Traceability code)

PIN NO.	CONNECTIONS
1	Input GND
2	Input
5	Output GND
6	Output
3,7	To be GNDed
4,8	Case GND


OUTLINE DRAWING:

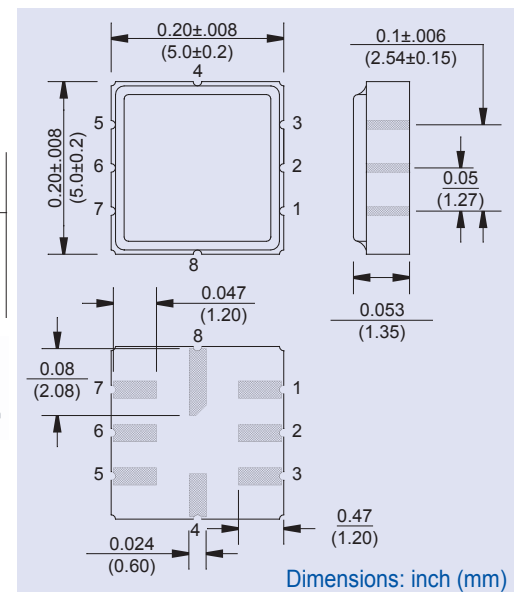

FREQUENCY RESPONSE:

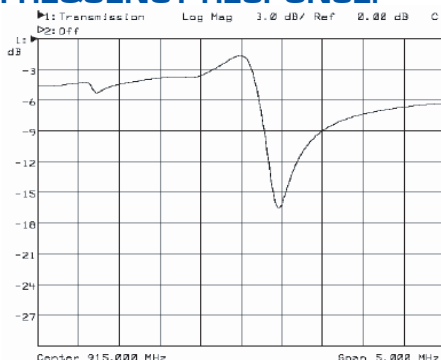

TEST CIRCUIT:



ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.