

# ALUMINUM ELECTROLYTIC CAPACITORS

**WD** Chip Type, Low Impedance  
High Temperature (260°C) Reflow  
series



- Corresponding with 260°C peak reflow soldering  
Recommended reflow condition : 260°C peak 5 sec. 230°C over 60 sec.  
2 times ( $\phi 10 \times 10 : 1$  time)
- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



## Specifications


| Item                                  | Performance Characteristics   |  |    |    |    |    |    |                      |
|---------------------------------------|---|--|----|----|----|----|----|----------------------|
| Category Temperature Range            | -55 to +105°C   |  |    |    |    |    |    |                      |
| Rated Voltage Range                   | 6.3 to 50V  |  |    |    |    |    |    |                      |
| Rated Capacitance Range               | 1 to 1500 $\mu$ F   |  |    |    |    |    |    |                      |
| Capacitance Tolerance                 | $\pm 20\%$ at 120Hz, 20°C   |  |    |    |    |    |    |                      |
| Leakage Current                       | After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 ( $\mu$ A), whichever is greater.  |  |    |    |    |    |    |                      |
| Tangent of loss angle (tan $\delta$ ) | Measurement frequency : 120Hz at 20°C   |  |    |    |    |    |    | ( ) is $\phi 8$ over |
|                                       | Rated voltage (V)   | 6.3  | 10 | 16 | 25 | 35 | 50 |                      |
| Stability at Low Temperature          | Measurement frequency : 120Hz   |  |    |    |    |    |    |                      |
|                                       | Rated voltage (V)   | 6.3  | 10 | 16 | 25 | 35 | 50 |                      |
|                                       | Impedance ratio<br>ZT / Z20 (MAX.)  | Z-25°C / Z+20°C                                    | 3  | 2  | 2  | 2  | 2  |                      |
| Endurance                             | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for $\phi D = 4, 5$ and 6.3) at 105°C.                             |  |    |    |    |    |    |                      |
|                                       | Capacitance change  | Within $\pm 30\%$ of the initial capacitance value |    |    |    |    |    |                      |
|                                       | tan $\delta$  | 200% or less than the initial specified value      |    |    |    |    |    |                      |
| Resistance to soldering heat          | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. |  |    |    |    |    |    |                      |
|                                       | Capacitance change  | Within $\pm 10\%$ of the initial capacitance value |    |    |    |    |    |                      |
|                                       | Leakage current   | Less than or equal to the initial specified value  |    |    |    |    |    |                      |
| Marking                               | Black print on the case top.  |  |    |    |    |    |    |                      |

## Chip Type

( $\phi 4$  to  $\phi 6.3$ )



( $\phi 8$  to  $\phi 10$ )

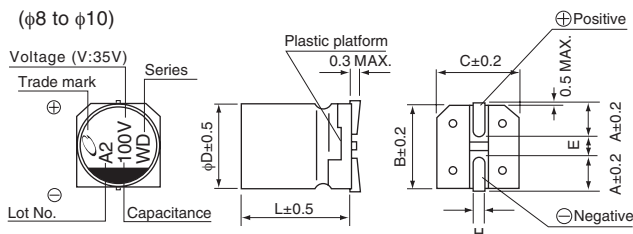

## Type numbering system (Example : 16V 22 $\mu$ F)



| $\phi D \times L$ | 4 × 5.8    | 5 × 5.8    | 6.3 × 5.8  | 6.3 × 7.7  | 8 × 10     | 10 × 10    |
|-------------------|------------|------------|------------|------------|------------|------------|
| A                 | 1.8        | 2.1        | 2.4        | 2.4        | 2.9        | 3.2        |
| B                 | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 10.3       |
| C                 | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 10.3       |
| E                 | 1.0        | 1.3        | 2.2        | 2.2        | 3.1        | 4.5        |
| L                 | 5.8        | 5.8        | 5.8        | 7.7        | 10         | 10         |
| H                 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

## Voltage

|      |     |    |    |    |    |    |
|------|-----|----|----|----|----|----|
| V    | 6.3 | 10 | 16 | 25 | 35 | 50 |
| Code | j   | A  | C  | E  | V  | H  |

● Dimension table in next page.



## ■ Dimensions

| Cap.<br>( $\mu$ F) | V<br>Code | 6.3       |      |     | 10        |      |     | 16        |      |     | 25        |      |     | 35        |      |     | 50        |      |     |        |      |     |
|--------------------|-----------|-----------|------|-----|-----------|------|-----|-----------|------|-----|-----------|------|-----|-----------|------|-----|-----------|------|-----|--------|------|-----|
|                    |           | 0J        |      |     | 1A        |      |     | 1C        |      |     | 1E        |      |     | 1V        |      |     | 1H        |      |     |        |      |     |
| 1                  | 010       |           |      |     |           |      |     |           |      |     |           |      |     |           |      |     | 4 × 5.8   | 5.00 | 30  |        |      |     |
| 2.2                | 2R2       |           |      |     |           |      |     |           |      |     |           |      |     |           |      |     | 4 × 5.8   | 5.00 | 30  |        |      |     |
| 3.3                | 3R3       |           |      |     |           |      |     |           |      |     |           |      |     |           |      |     | 4 × 5.8   | 5.00 | 30  |        |      |     |
| 4.7                | 4R7       |           |      |     |           |      |     |           |      |     |           |      |     | 4 × 5.8   | 1.80 | 80  | 5 × 5.8   | 1.52 | 85  |        |      |     |
| 10                 | 100       |           |      |     |           |      |     |           |      |     | 4 × 5.8   | 1.80 | 80  | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.88 | 165 |        |      |     |
| 15                 | 150       |           |      |     |           |      |     | 4 × 5.8   | 1.80 | 80  | 5 × 5.8   | 0.76 | 150 | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.88 | 165 |        |      |     |
| 22                 | 220       |           |      |     | 4 × 5.8   | 1.80 | 80  | 5 × 5.8   | 0.76 | 150 | 5 × 5.8   | 0.76 | 150 | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.88 | 165 |        |      |     |
| 27                 | 270       | 4 × 5.8   | 1.80 | 80  | 5 × 5.8   | 0.76 | 150 | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.68 | 185 |        |      |     |
| 33                 | 330       | 5 × 5.8   | 0.76 | 150 | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.68 | 185 |        |      |     |
| 47                 | 470       | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.68 | 185 |        |      |     |
| 56                 | 560       | 5 × 5.8   | 0.76 | 150 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.34 | 280 | 8 × 10 | 0.34 | 300 |
| 68                 | 680       | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.34 | 280 | 8 × 10 | 0.34 | 300 |
| 100                | 101       | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.34 | 280 | 8 × 10    | 0.17 | 450 | 8 × 10    | 0.34 | 300 |        |      |     |
| 150                | 151       | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.34 | 280 | 8 × 10    | 0.17 | 450 | 8 × 10    | 0.17 | 450 | 10 × 10   | 0.18 | 670 |        |      |     |
| 220                | 221       | 6.3 × 5.8 | 0.44 | 230 | 6.3 × 7.7 | 0.34 | 280 | 6.3 × 7.7 | 0.34 | 280 | 8 × 10    | 0.17 | 450 | 10 × 10   | 0.09 | 670 | 10 × 10   | 0.18 | 670 |        |      |     |
| 330                | 331       | 6.3 × 7.7 | 0.34 | 280 | 8 × 10    | 0.17 | 450 | 8 × 10    | 0.17 | 450 | 10 × 10   | 0.09 | 670 | 10 × 10   | 0.09 | 670 |           |      |     |        |      |     |
| 470                | 471       | 8 × 10    | 0.17 | 450 | 8 × 10    | 0.17 | 450 | 8 × 10    | 0.17 | 450 | 10 × 10   | 0.09 | 670 |           |      |     |           |      |     |        |      |     |
| 680                | 681       | 8 × 10    | 0.17 | 450 | 10 × 10   | 0.09 | 670 | 10 × 10   | 0.09 | 670 |           |      |     |           |      |     |           |      |     |        |      |     |
| 1000               | 102       | 10 × 10   | 0.09 | 670 | 10 × 10   | 0.09 | 670 |           |      |     |           |      |     |           |      |     |           |      |     |        |      |     |
| 1500               | 152       | 10 × 10   | 0.09 | 670 |           |      |     |           |      |     |           |      |     |           |      |     |           |      |     |        |      |     |

Max. Impedance ( $\Omega$ ) at 20°C 100kHz,  
Rated ripple current (mA<sub>rms</sub>) at 105°C 100kHz

## ● Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-------|--------|--------|-------|----------------|
| Coefficient | 0.35  | 0.50   | 0.64   | 0.83  | 1.00           |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.