

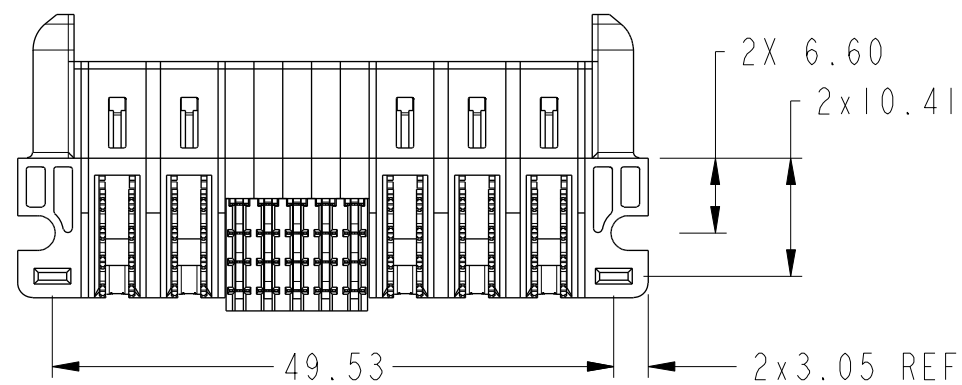
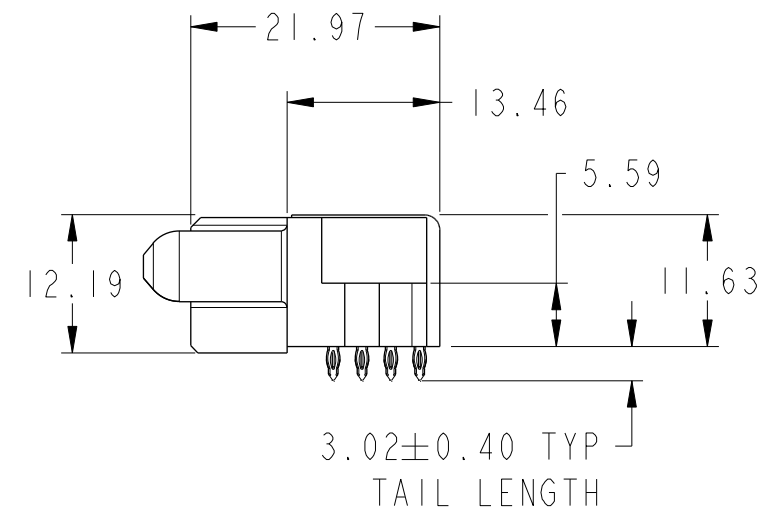


PRODUCT NUMBER SEE SHEET 2

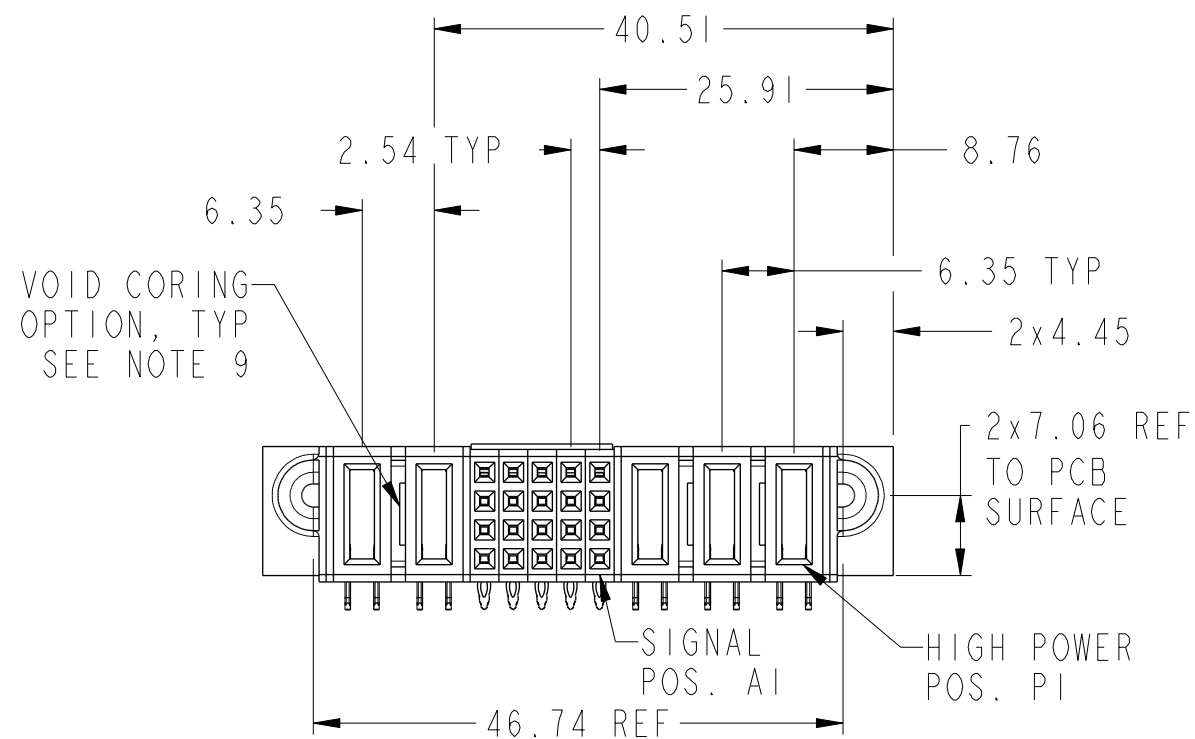


| | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|---|-------------|-------------|------------------------|--------------|------|--------|----|-----------|----------|----------------|-----------|-----|------|----------------|------------|--|--|---|-------|-----------------|--|------------------|---|--------|------------------|-----|---|
| spec ref | * | dr | Vicking Liu | 2016/01/14 | projection | MM | size | A3 | scale | 3:2 | | | | | | | | | | | | | | | | | | |
| tolerance std | ASME Y14.5 | eng | Vicking Liu | 2016/01/29 | | | ecn no | - | rel level | Released | | | | | | | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | chr | Fancy Zhang | 2016/01/29 | | | | | | | product family | PwrBlade+ | | | | | | | | | | | | | | | | |
| surface | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table> | linear | 0.X | ±0.5 | | 0.XX | ±0.25 | | 0.XXX | ±0.10 | angular | 0° | ±2° | appr | Pei-Ming Zheng | 2016/01/29 | | | <table border="1"> <tr> <td>title</td> <td>3HP + 20S + 2HP</td> </tr> <tr> <td></td> <td>RA PF RECEPTACLE</td> </tr> </table> | title | 3HP + 20S + 2HP | | RA PF RECEPTACLE | <table border="1"> <tr> <td>dwg no</td> <td>10106127-5005001</td> </tr> <tr> <td>rev</td> <td>A</td> </tr> </table> | dwg no | 10106127-5005001 | rev | A |
| linear | 0.X | ±0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.XX | ±0.25 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.XXX | ±0.10 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| angular | 0° | ±2° | | | | | | | | | | | | | | | | | | | | | | | | | | |
| title | 3HP + 20S + 2HP | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | RA PF RECEPTACLE | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| dwg no | 10106127-5005001 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| rev | A | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ASME Y14.5 | | www.fci.com | cat. no. | Product - Customer Drw | sheet 1 of 3 | | | | | | | | | | | | | | | | | | | | | | | |

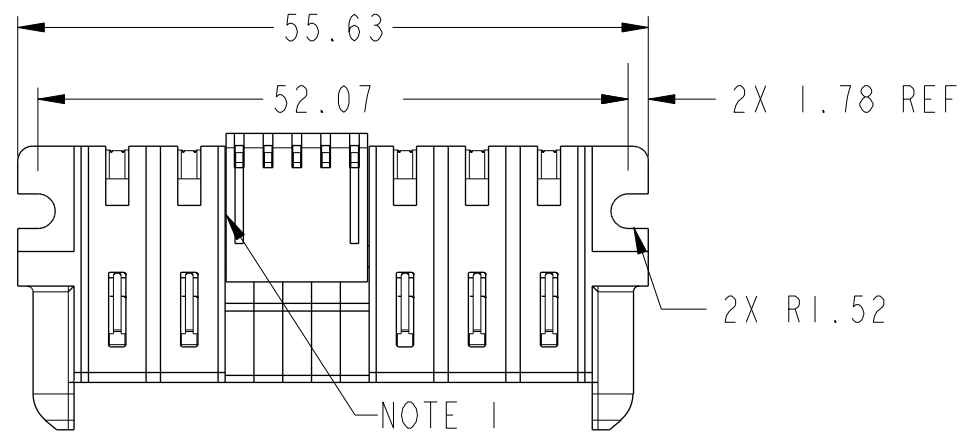

Copyright FCI.

| | | | | | | | | | | | | | |
|--------------------|------|----|----|----|--------|---|---|---|---|----|----|----|----|
| PRODUCT NO. | ROWS | HP | | | SIGNAL | | | | | HP | | | E2 |
| | | E1 | P5 | P4 | 5 | 4 | 3 | 2 | 1 | P3 | P2 | P1 | |
| 10106127-5005001LF | DCBA | H7 | H7 | S | S | S | S | S | S | H5 | H7 | H7 | |

| CODE | DESCRIPTION |
|------|-------------------------------|
| H5 | MFBL HIGH POWER CONTACT(3.02) |
| H7 | STD HIGH POWER CONTACT(3.02) |
| N | STD SIGNAL CONTACT, ROW A |
| P | STD SIGNAL CONTACT, ROW B |
| R | STD SIGNAL CONTACT, ROW C |
| S | STD SIGNAL CONTACT, ROW D |

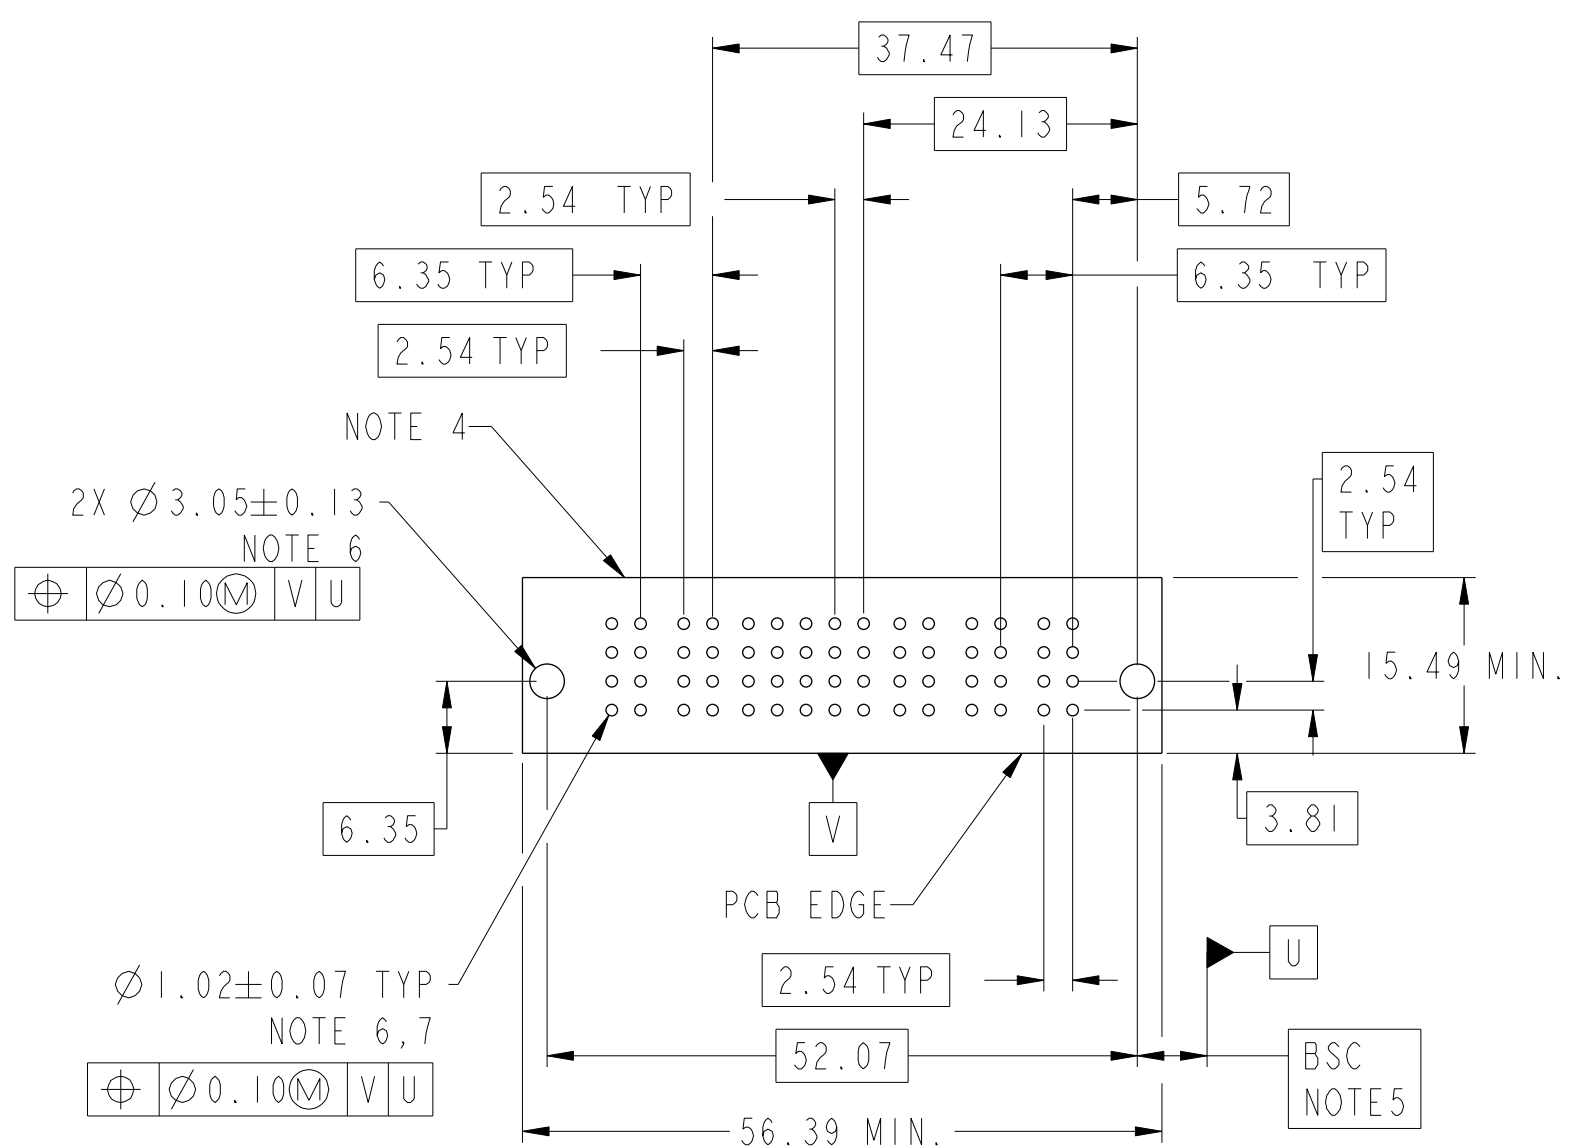




| | | | | | | | | |
|-------------|----------------|------------|---|----|------------------------|-------------------------|--------------|-------|
| dr | Vicking Liu | 2016/01/14 | projection | MM | size | A3 | scale | 3:2 |
| eng | Vicking Liu | 2016/01/29 | | | ecn no | | - | |
| chr | Fancy Zhang | 2016/01/29 | | | rel level | | Released | |
| appr | Pei-Ming Zheng | 2016/01/29 | product family | | PwrBlade+ | | | |
| | | | title 3HP + 20S + 2HP RA PF RECEPTACLE | | | dwg no 10106127-5005001 | | rev A |
| www.fci.com | | | cat. no. | | Product - Customer Drw | | sheet 2 of 3 | |

Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZING THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

| | | | | | | | | |
|---|----------------|--|---|---|--------------|----------|-------|-----|
| dr | Vicking Liu | 2016/01/14 | projection  | MM  | size | A3 | scale | 3:2 |
| eng | Vicking Liu | 2016/01/29 | | | ecn no | - | | |
| chr | Fancy Zhang | 2016/01/29 | | | rel level | Released | | |
| appr | Pei-Ming Zheng | 2016/01/29 | product family | PwrBlade+ | | | | |
|  | | title 3HP + 20S + 2HP RA PF RECEPTACLE | | dwg no 10106127-5005001 | rev A | | | |
| www.fci.com | | cat. no. | Product - Customer Drw | | sheet 3 of 3 | | | |





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.