


STRADELLA-IP-28-HB-S-PC

~30° spot beam. Variant made from PC.

TECHNICAL SPECIFICATIONS:

| | |
|----------------|---|
| Dimensions | 100.0 mm |
| Height | 9.5 mm |
| Fastening | pin, screw |
| ROHS compliant | yes  |



MATERIAL SPECIFICATIONS:

| Component | Type | Material | Colour | Finish |
|-------------------------|------------|----------|--------|--------|
| STRADELLA-IP-28-HB-S-PC | Multi-lens | PC | clear | |
| STRADELLA-28-SEAL | Seal | Silicone | white | |






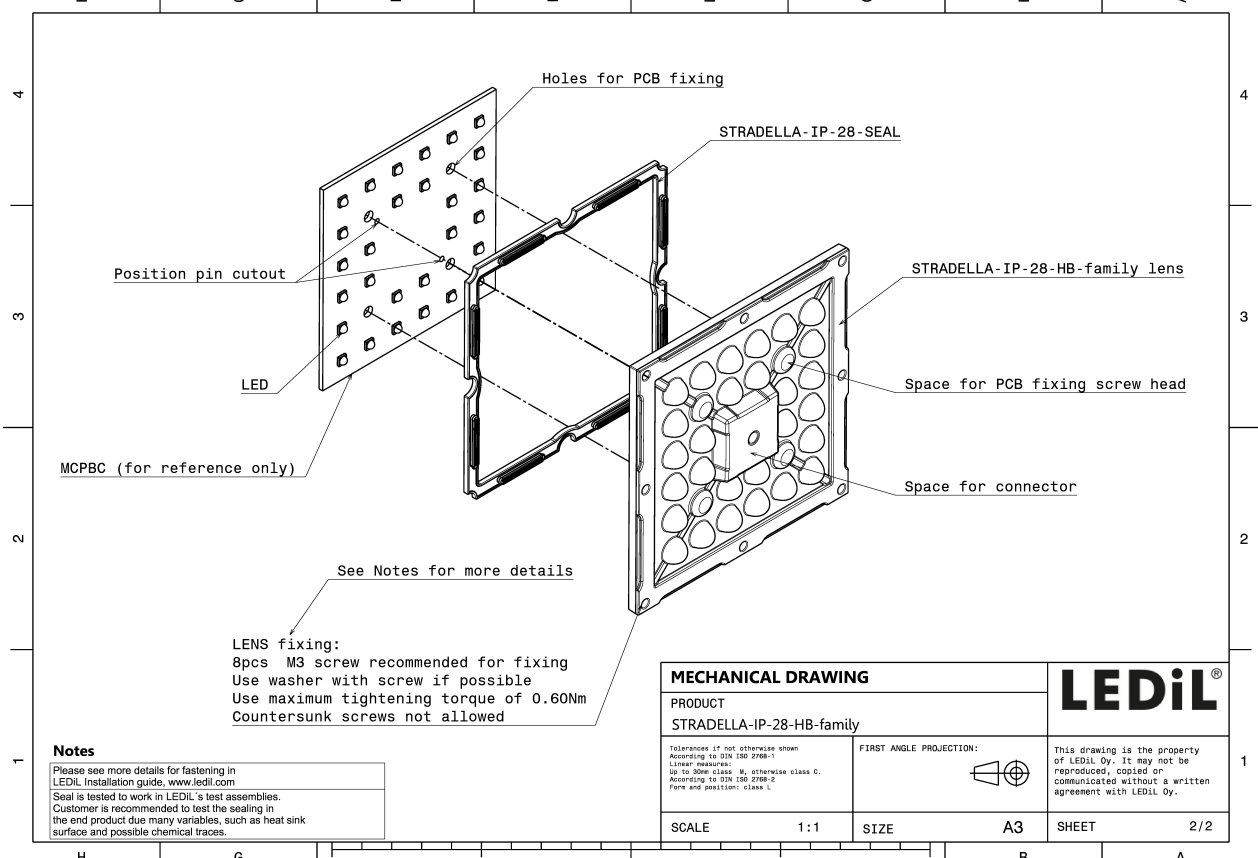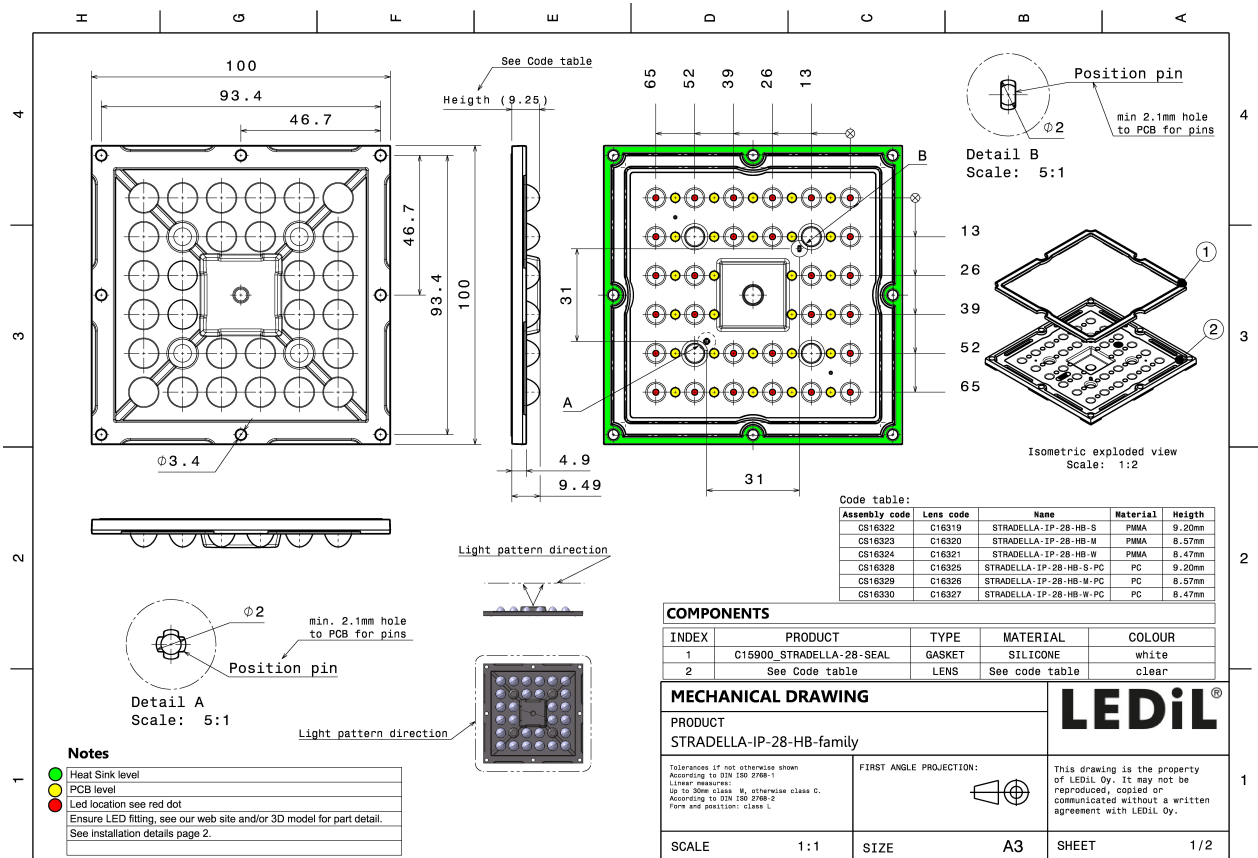




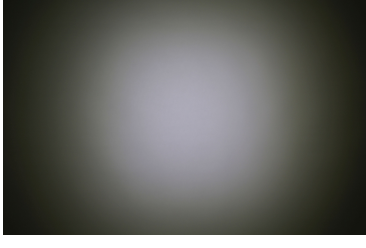
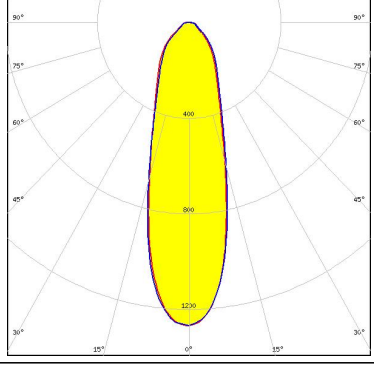


ORDERING INFORMATION:


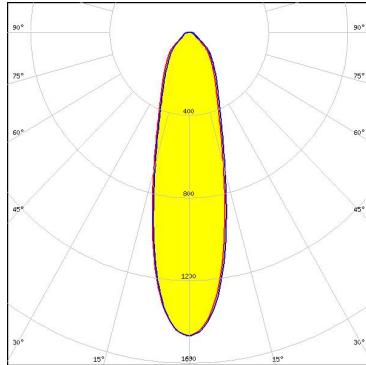

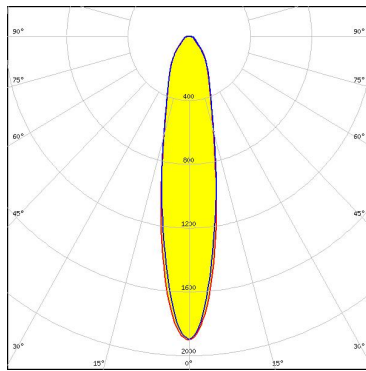

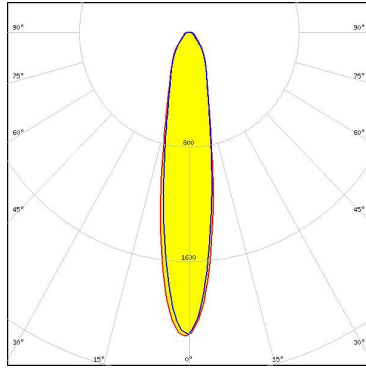
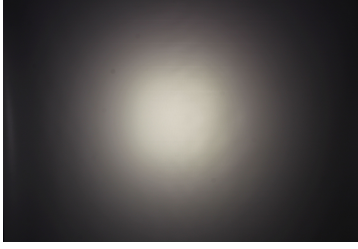
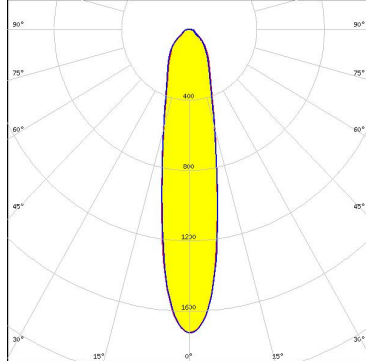
| Component | Type | Qty in box | MOQ | MPQ | Box weight (kg) |
|---|------------|------------|-----|-----|-----------------|
| CS16328_STRADELLA-IP-28-HB-S-PC » Box size: 476 x 273 x 247 mm | Multi-lens | 156 | 78 | 78 | 6.0 |

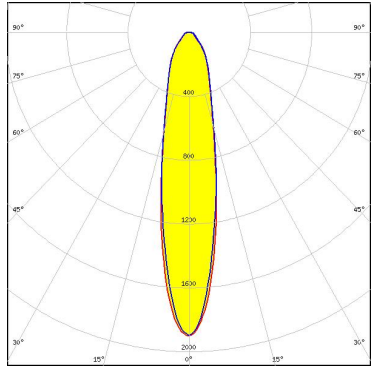

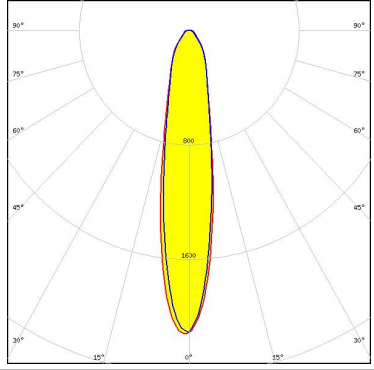PHOTOMETRIC DATA (MEASURED):
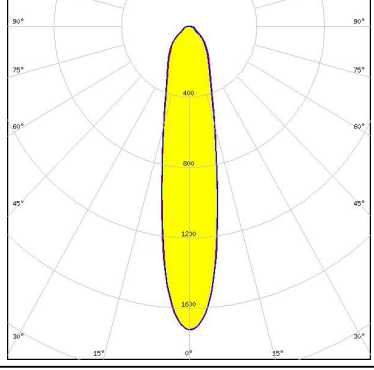
| | | |
|---|--|---|
| <p></p> <p>LED HiQLED STR28 CR JE2835 4x7 xxx FWHM 22.0° Efficiency 83 % Peak intensity 1.9 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p></p> <p>LED HiQLED STR28 CR JÐŠ3030 4x7 xxx FWHM 20.0° Efficiency 82 % Peak intensity 2.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p></p> <p>LED QUICK FLUX STR28 XD2x14 xxx G8 FWHM 22.0° Efficiency 83 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p></p> <p>LED QUICK FLUX STR28 XP2x14 xxx G7 FWHM 30.0° Efficiency 89 % Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |


PHOTOMETRIC DATA (MEASURED):

| | | |
|---|--|---|
| <p>COMET ELECTRONICS</p> <p>LED QUICK FLUX STR28 XT2x14 xxx G5 FWHM 29.0° Efficiency 86 % Peak intensity 1.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p>CREE</p> <p>LED J Series 2835 FWHM 22.0° Efficiency 83 % Peak intensity 1.9 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p>CREE</p> <p>LED J Series 3030 FWHM 20.0° Efficiency 82 % Peak intensity 2.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |
| <p>CREE</p> <p>LED XD16 FWHM 22.0° Efficiency 83 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |  |



PHOTOMETRIC DATA (MEASURED):





LED XP-G3
 FWHM 30.0°
 Efficiency 84 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

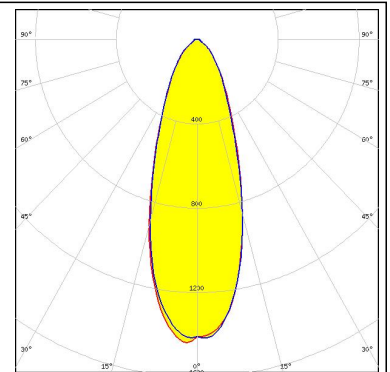



LED XT-E
 FWHM 29.0°
 Efficiency 86 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

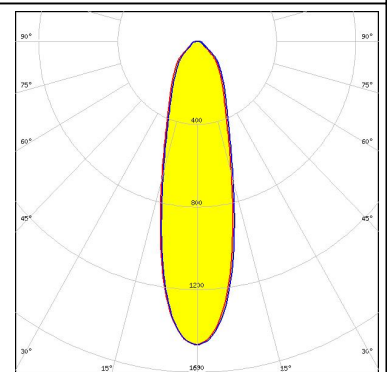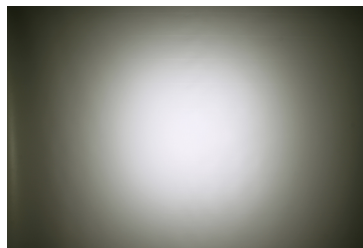

LED OSCONIQ S 3030
 FWHM 26.0°
 Efficiency 86 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

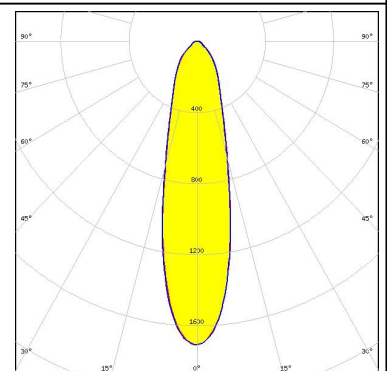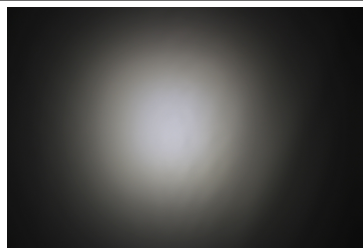


LED OSLON Square CSSRM2/CSSRM3
 FWHM 23.0°
 Efficiency 85 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

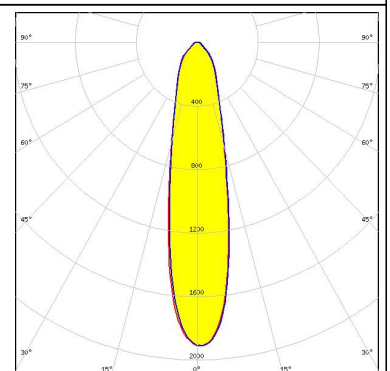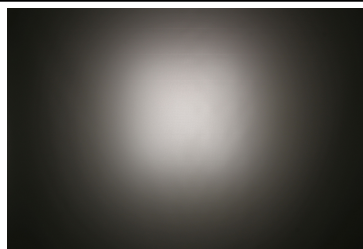

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED HiLOM SC28 (LH181B)
FWHM 21.0°
Efficiency 80 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

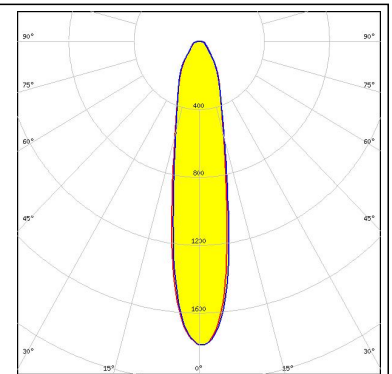

SAMSUNG


LED HiLOM SM28 (LM301B)
FWHM 23.0°
Efficiency 83 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

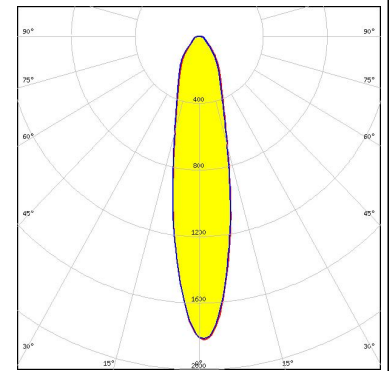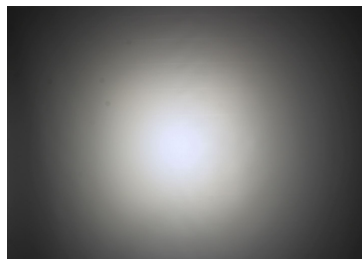


PHOTOMETRIC DATA (SIMULATED):




LED XP-G2 HE
 FWHM 36.0°
 Efficiency 85 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

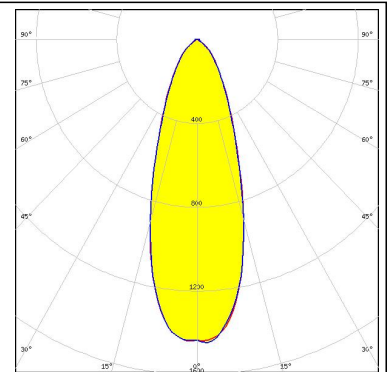


LED LUXEON 3030 2D (Round LES)
 FWHM 25.0°
 Efficiency 89 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

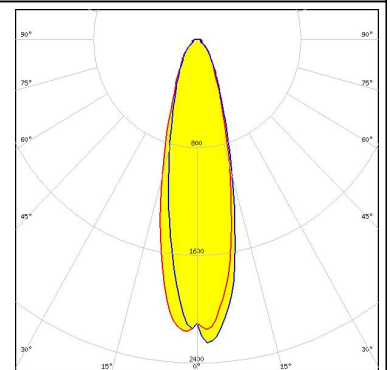

LED NF2x757G
 FWHM 27.0°
 Efficiency 91 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

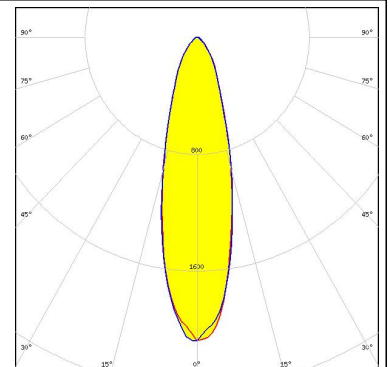


LED NVSxE21A
 FWHM 23.0°
 Efficiency 89 %
 Peak intensity 2.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

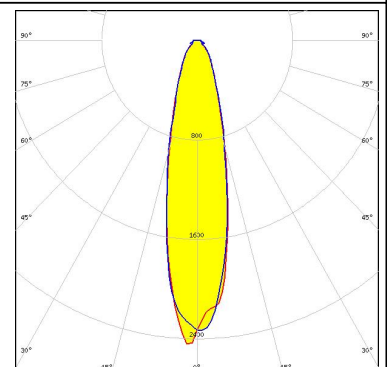


PHOTOMETRIC DATA (SIMULATED):




LED NVSxx19B/NVSxx19C
FWHM 34.0°
Efficiency 93 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

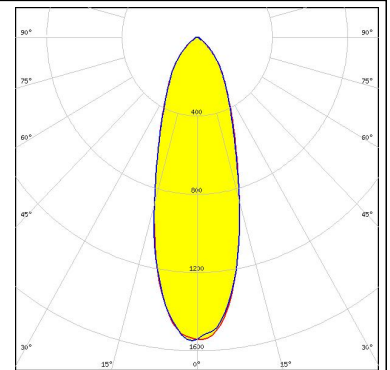


LED Duris S5 (2 chip)
FWHM 25.0°
Efficiency 87 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

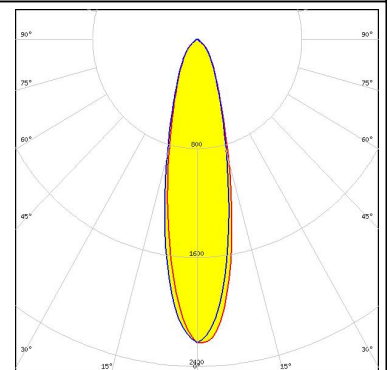

LED OSCONIQ P 3030
FWHM 20.0°
Efficiency 92 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

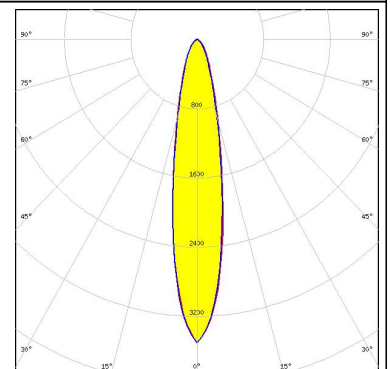


LED OSCONIQ P 3737 (3W version)
FWHM 34.0°
Efficiency 90 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

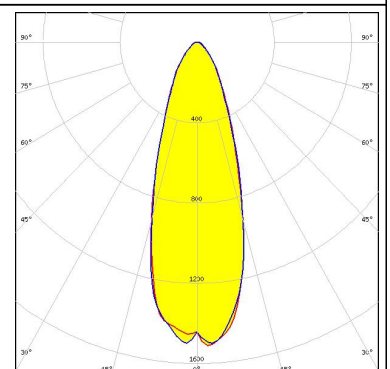

PHOTOMETRIC DATA (SIMULATED):


OSRAM

Opto Semiconductors
 LED OSOLON Square CSSRM2/CSSRM3
 FWHM 27.0°
 Efficiency 85 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

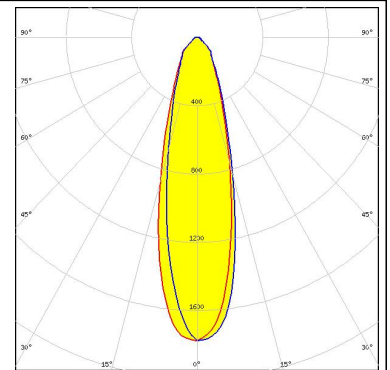


SAMSUNG


LED LH351B
 FWHM 32.0°
 Efficiency 86 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

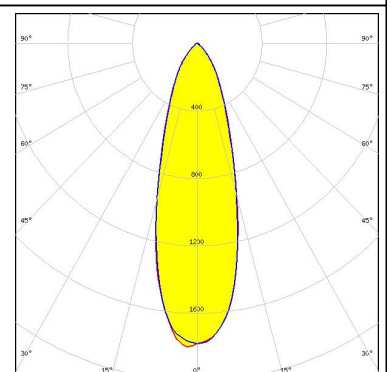


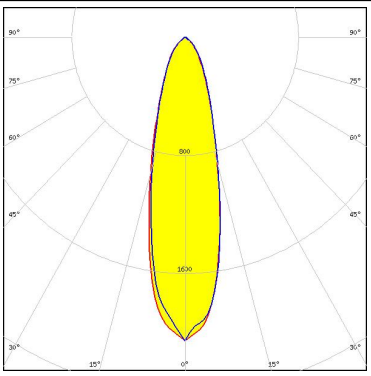

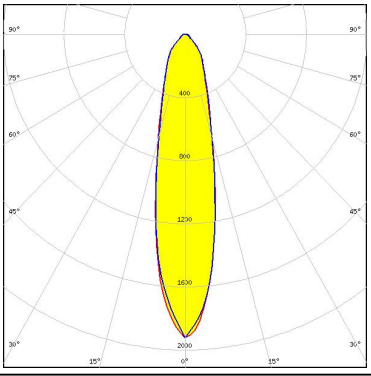

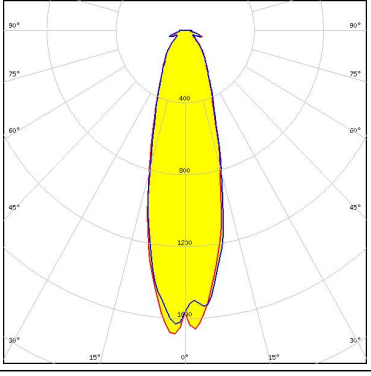
SEOUL SEMICONDUCTOR
 LED SEOUL 3030
 FWHM 26.0°
 Efficiency 87 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

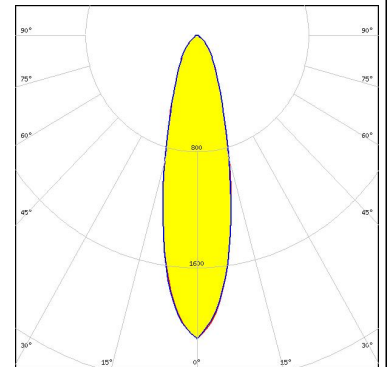

SEOUL SEMICONDUCTOR
 LED SEOUL DC 3030C
 FWHM 26.0°
 Efficiency 88 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

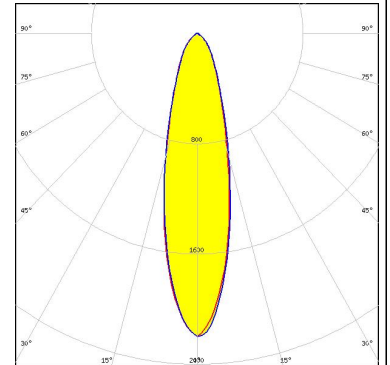

PHOTOMETRIC DATA (SIMULATED):

| | |
|--|---|
| <p> SEUL SEMICONDUCTOR</p> <p>LED Z5M1/Z5M2 FWHM 27.0° Efficiency 87 % Peak intensity 2.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |
| <p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y19 FWHM 24.0° Efficiency 82 % Peak intensity 1.9 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |
| <p> SEUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM 28.0° Efficiency 89 % Peak intensity 1.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p> |  |

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.