



RZW Series

Features

- 105°C, 4,000 ~ 10,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHs Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance																																																			
Category Temperature Range	-55°C ~ +105°C																																																			
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																			
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																																																			
Tanδ (at 120 Hz, 20°C)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Tanδ (max)</td><td>0.22</td><td>0.19</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td></tr></table> When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.								Rated Voltage	6.3	10	16	25	35	50	63	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																												
Rated Voltage	6.3	10	16	25	35	50	63																																													
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																																													
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td></tr><tr><td>Impedance Ratio</td><td>Z(-55°C)/Z(+20°C)</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>								Rated Voltage		6.3	10	16	25	35	50	63	Impedance Ratio	Z(-55°C)/Z(+20°C)	3	3	3	3	3	3	3																										
Rated Voltage		6.3	10	16	25	35	50	63																																												
Impedance Ratio	Z(-55°C)/Z(+20°C)	3	3	3	3	3	3	3																																												
Endurance	<table><tr><td rowspan="2">Time</td><td>6.3 ~ 10V</td><td colspan="7">4,000 Hrs for ϕD = 5 ~ 6.3 mm; 6,000 Hrs for ϕD = 8 ~ 10 mm; 8,000 Hrs for ϕD ≥ 12.5 mm</td></tr><tr><td>16 ~ 63V</td><td colspan="7">5,000 Hrs for ϕD = 5 ~ 6.3 mm; 7,000 Hrs for ϕD = 8 ~ 10 mm; 10,000 Hrs for ϕD ≥ 12.5 mm</td></tr><tr><td colspan="2">Capacitance Change</td><td colspan="7">Within ±25% of initial value</td></tr><tr><td colspan="2">Tanδ</td><td colspan="7">Less than 200% of specified value</td></tr><tr><td colspan="2">Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 10,000 hours at 105°C.								Time	6.3 ~ 10V	4,000 Hrs for ϕD = 5 ~ 6.3 mm; 6,000 Hrs for ϕD = 8 ~ 10 mm; 8,000 Hrs for ϕD ≥ 12.5 mm							16 ~ 63V	5,000 Hrs for ϕD = 5 ~ 6.3 mm; 7,000 Hrs for ϕD = 8 ~ 10 mm; 10,000 Hrs for ϕD ≥ 12.5 mm							Capacitance Change		Within ±25% of initial value							Tanδ		Less than 200% of specified value							Leakage Current		Within specified value						
Time	6.3 ~ 10V	4,000 Hrs for ϕD = 5 ~ 6.3 mm; 6,000 Hrs for ϕD = 8 ~ 10 mm; 8,000 Hrs for ϕD ≥ 12.5 mm																																																		
	16 ~ 63V	5,000 Hrs for ϕD = 5 ~ 6.3 mm; 7,000 Hrs for ϕD = 8 ~ 10 mm; 10,000 Hrs for ϕD ≥ 12.5 mm																																																		
Capacitance Change		Within ±25% of initial value																																																		
Tanδ		Less than 200% of specified value																																																		
Leakage Current		Within specified value																																																		
Shelf Life Test	<table><tr><td>Test Time</td><td colspan="7">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="7">Within ±25% of initial value</td></tr><tr><td>Tanδ</td><td colspan="7">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="7">Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.								Test Time	1,000 Hrs							Capacitance Change	Within ±25% of initial value							Tanδ	Less than 200% of specified value							Leakage Current	Within specified value																		
Test Time	1,000 Hrs																																																			
Capacitance Change	Within ±25% of initial value																																																			
Tanδ	Less than 200% of specified value																																																			
Leakage Current	Within specified value																																																			
Ripple Current and Frequency Multipliers	<table><tr><td colspan="2">Freq.(Hz)</td><td>120</td><td>1k</td><td>10k</td><td>100k up</td></tr><tr><td rowspan="5">Cap.(μF)</td><td>under ~ 33</td><td>0.42</td><td>0.70</td><td>0.90</td><td>1.0</td></tr><tr><td>39 ~ 270</td><td>0.50</td><td>0.73</td><td>0.92</td><td>1.0</td></tr><tr><td>330 ~ 680</td><td>0.55</td><td>0.77</td><td>0.94</td><td>1.0</td></tr><tr><td>820 ~ 1,800</td><td>0.6</td><td>0.80</td><td>0.96</td><td>1.0</td></tr><tr><td>2,200 ~ 18,000</td><td>0.7</td><td>0.85</td><td>0.98</td><td>1.0</td></tr></table>								Freq.(Hz)		120	1k	10k	100k up	Cap.(μF)	under ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.50	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 18,000	0.7	0.85	0.98	1.0												
Freq.(Hz)		120	1k	10k	100k up																																															
Cap.(μF)	under ~ 33	0.42	0.70	0.90	1.0																																															
	39 ~ 270	0.50	0.73	0.92	1.0																																															
	330 ~ 680	0.55	0.77	0.94	1.0																																															
	820 ~ 1,800	0.6	0.80	0.96	1.0																																															
	2,200 ~ 18,000	0.7	0.85	0.98	1.0																																															


Diagram of Dimensions

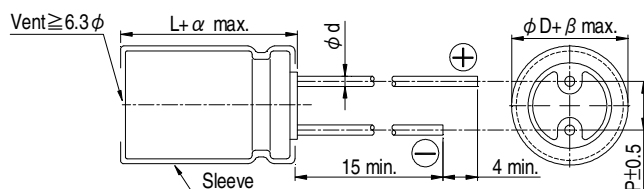

Lead Spacing and Diameter Unit: mm

ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6			0.8	
α	L<20: 1.5, L≥20: 2.0						
β	0.5						

The case size of 12.5×16, 16×16, 16×20, 18×16, 18×20 and 18×25 are suitable for below diagram:

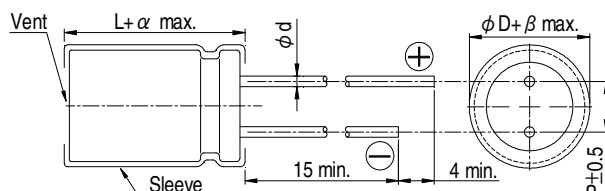



Dimension: $\phi D \times L(mm)$

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension and Permissible Ripple Current

Rated Volt. V_{DC} Contents Cap. (μF)	6.3V (0J)				10V (1A)				16V (1C)				25V (1E)			
	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C			20°C	-10°C	
47													5×11	0.58	1.16	210
56									5×11	0.58	1.16	210				
100					5×11	0.58	1.16	210					6.3×11	0.22	0.44	340
120									6.3×11	0.22	0.44	340				
150	5×11	0.58	1.16	210												
220					6.3×11	0.22	0.44	340	8×11.5	0.11	0.22	640	8×11.5	0.11	0.22	640
330	6.3×11	0.22	0.44	340					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865
470					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210
680	8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450
820	10×12.5	0.080	0.16	865									10×25	0.042	0.084	1,650
1,000	8×15	0.087	0.174	840	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940
1,200	8×20 10×16	0.069 0.060	0.128 0.120	1,050 1,210	10×20	0.046	0.092	1,400	10×25	0.042	0.084	1,650	18×16	0.043	0.086	2,210
1,500	10×20	0.046	0.092	1,400	10×25 12.5×16	0.042 0.049	0.084 0.090	1,650 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25	0.027	0.054	2,230
1,800	12.5×16	0.045	0.090	1,450									12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530
2,200	10×25	0.042	0.084	1,650	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×35 18×20	0.020 0.026	0.040 0.052	2,880 2,860
2,700	10×30 16×16	0.031 0.042	0.062 0.084	1,910 1,940	18×16	0.043	0.086	2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25	0.017 0.021	0.034 0.042	3,350 2,930
3,300	12.5×20	0.035	0.070	1,900	12.5×25	0.027	0.054	2,230	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140
3,900	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170
4,700	12.5×30	0.024	0.048	2,650	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220
5,600	12.5×35 16×20	0.020 0.027	0.040 0.054	2,880 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.03	3,610 4,170	18×40	0.012	0.024	4,280
6,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40	0.013	0.026	4,080				
8,200	16×31.5	0.017	0.034	3,450	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×35.5	0.014	0.02	4,220				
10,000	16×35.5 18×25	0.015 0.019	0.030 0.038	3,610 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220	18×40	0.012	0.024	4,280				
12,000	16×40 18×31.5	0.013 0.015	0.026 0.030	4,080 4,170	18×40	0.012	0.024	4,280								
15,000	18×35.5	0.014	0.028	4,220												
18,000	18×40	0.012	0.024	4,280												



Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension and Permissible Ripple Current

Rated Volt. V_{DC} Contents Cap. (μF)	35V (1V)				50V (1H)				63V (1J)			
	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C	
3.3					5×11	2.9	5.8	53				
4.7					5×11	2.5	5.0	95				
10					5×11	2.0	4.0	130				
15									5×11	1.2	2.4	165
22					5×11	0.91	1.82	180				
33	5×11	0.58	1.16	210					6.3×11	0.49	0.98	265
56	6.3×11	0.22	0.44	340	6.3×11	0.39	0.78	295	8×11.5	0.31	0.62	500
82									8×15 10×12.5	0.22 0.15	0.44 0.30	665 690
100					8×11.5	0.22	0.44	555				
120					8×15	0.190	0.38	730	8×20 10×16	0.17 0.11	0.34 0.22	820 950
150	8×11.5	0.11	0.22	640	10×12.5	0.160	0.32	760				
180					8×20	0.17	0.34	880	10×20 12.5×16	0.078 0.101	0.156 0.202	1,150 1,150
220	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	10×16	0.110	0.22	1,050	10×25	0.064	0.128	1,350
270	8×20	0.064	0.128	1,050	10×20 12.5×16	0.078 0.079	0.156 0.158	1,220 1,260	12.5×20	0.057	0.114	1,500
330	10×16	0.060	0.120	1,210	10×25	0.072	0.144	1,440				
390									12.5×25	0.043	0.086	1,900
470	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.056 0.059 0.072	0.112 0.118 0.114	1,690 1,660 1,690	12.5×30 16×20	0.039 0.045	0.078 0.090	2,300 2,000
560	10×25	0.042	0.084	1,650	12.5×25 18×16	0.044 0.070	0.088 0.140	1,950 1,930	12.5×35	0.034	0.068	2,500
680	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×30	0.039	0.078	2,310	12.5×40 16×25 18×20	0.029 0.035 0.042	0.058 0.070 0.084	2,800 2,600 2,500
820					12.5×35 16×20	0.033 0.044	0.066 0.088	2,510 2,210	16×31.5 18×25	0.029 0.034	0.058 0.068	2,850 2,800
1,000	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×40 16×25 18×20	0.027 0.033 0.047	0.054 0.066 0.094	2,920 2,555 2,490	16×35.5	0.027	0.054	2,900
1,200	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	16×31.5 18×25	0.027 0.028	0.054 0.056	3,010 2,740	16×40 18×31.5	0.025 0.028	0.050 0.056	3,400 3,300
1,500	12.5×35	0.020	0.040	2,880	16×35.5	0.024	0.048	3,150	18×35.5	0.025	0.050	3,400
1,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×40 18×31.5	0.021 0.024	0.042 0.048	3,710 3,635	18×40	0.024	0.048	3,500
2,200	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	18×35.5	0.022	0.044	3,680				
2,700	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×40	0.018	0.036	3,800				
3,300	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220								
3,900	18×40	0.012	0.024	4,280								

Part Numbering System

RZW Series	470 μF	$\pm 20\%$	16V	Bulk Package	Gas Type	8 $\phi \times 15\text{L}$	Pb-free and PET sleeve
RZW	471	M	1C	BK	-	0815	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.