

# M2 DIN rail mounted electronic timers (22.5 mm)

## Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

### Characteristics

#### Accuracy

Repetition accuracy (with constant parameters)	± 0.5 %
Variation according to VDE 0435 0 • 40 °C	± 3 %
-20 • 60 °C	± 5 %
Min. control pulse	0.02 s
Maximum reset time by de-energisation	0.100 s
Immunity from micro power cuts	<0.02 s

#### Output specification

Nominal current	8 A ~ 1 A ~
Nominal voltage	250 V ~
Rated power	2000 VA - 30 W
Maximum admissible current	15 A < 0.01 s
Minimum current	50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	1.5 • 10 <sup>5</sup>

Max. permitted number of operations per hour at I max 250 V ~ resistive	360
Mechanical life (operations)	2 x 10 <sup>7</sup>

#### Function and use

Display of output state by LED	output in operation	Green LED
	power on	Red LED

Voltage variation	± 15 % Un 127 V-10% 240 V+10%
-------------------	----------------------------------

Maximum absorbed power	1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
------------------------	---

Temperature limits	Use Stored	-20 °C + 60 °C -30 °C + 70 °C
-----------------------	---------------	----------------------------------

Insulation according to standard VDE 0110 - IEC 255 Group C	250 V ~
--	---------

Protection class according to NFC 20010 - IEC 529 - DIN 40050	IP40
--	------

Conformity to standards IEC 255 VDE 0435-2021	•
--	---

Protection from voltage surge (in joules)	2
--	---

Connection: by terminal blocks with cable guide and front-access captive screws	•
--	---

Terminal capacity : multi or single wire 1 or 2 leads	2.5 mm <sup>2</sup>
--	---------------------

Mounting on symmetrical DIN rail 35 mm EN 50022	•
--	---

Weight (g)	110
------------	-----

Products currently being replaced by the TR range

### Timing

#### Types

#### Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24 V ~

#### Functions

#### Relay outputs

#### Nominal current

#### Timing ranges ( 8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	

#### Function diagrams

#### Terminal connections

A1 - A2 : Supply
A3 : Bridge (A2 - A3) for 24V supply
B1 - B2 : Control contact
15 - 16 - 18 : Timed output contact
Galvanic insulation Input-Output




#### Accessories

Panel adaptor	79 237 806
---------------	------------

#### Function diagrams


Function A  
Delay on energisation



Function B  
Timing on impulse  
(one shot)



Function C  
Timing after impulse  
(delay off)




Function H  
Timing on energisation  
Interval timer - one shot



Function At  
Timing on energisation  
with memory




Function Ht  
Timing on energisation  
with memory



Function L  
Cyclic timing




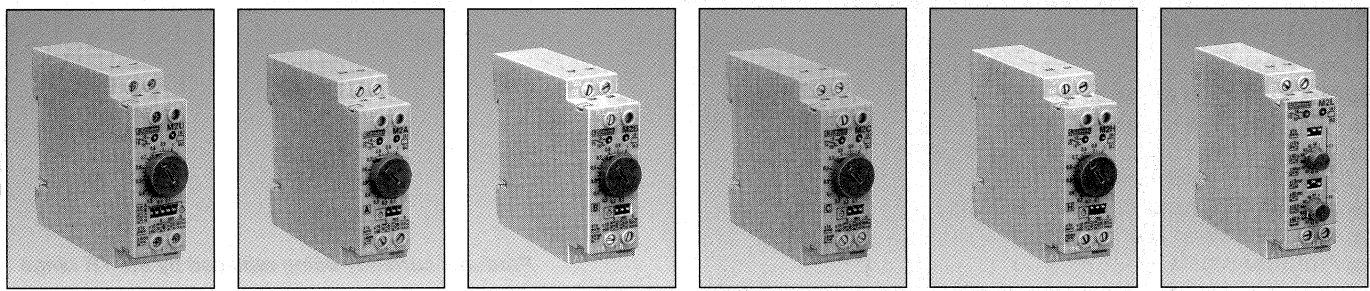



0.1 s • 60 h	0.1 s • 60 h	0.1 s • 60 h	0.1 s • 60 h	0.1 s • 60 h	0.1 s • 60 h
M2 U	M2 A	M2 B	M2 C	M2 H	M2 L
88 881 005	—	—	—	—	88 881 505
88 881 006	—	—	—	—	88 881 506
—	88 881 100	88 881 200	88 881 300	88 881 400	—
—	88 881 102	88 881 202	88 881 302	88 881 402	—
—	88 881 104	88 881 204	88 881 304	88 881 404	—
•	•	•	•	•	•

1  
2

Multi-function with selection	Mono-function	Mono-function	Mono-function	Mono-function	Mono-function
A B C H At Ht	A	B	C	H	L
1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover	1 timed changeover
8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡	8 A ~ 1A ≡
•	•	•	•	•	•

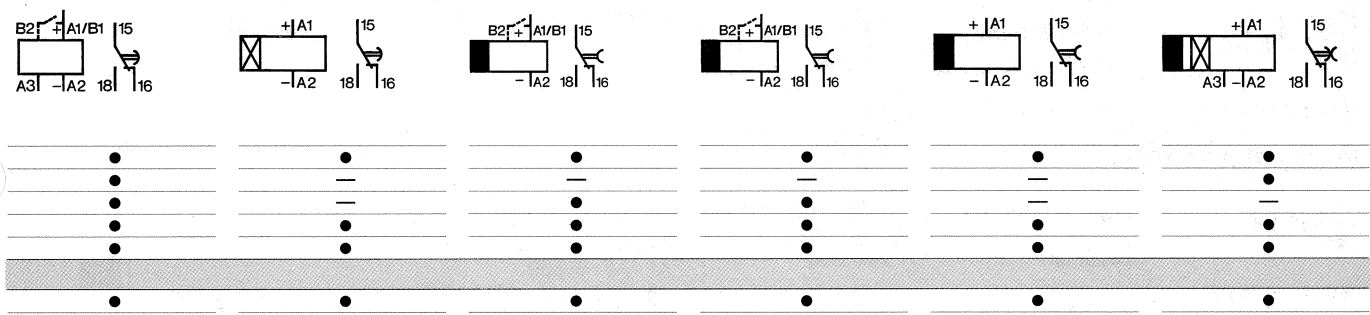

3

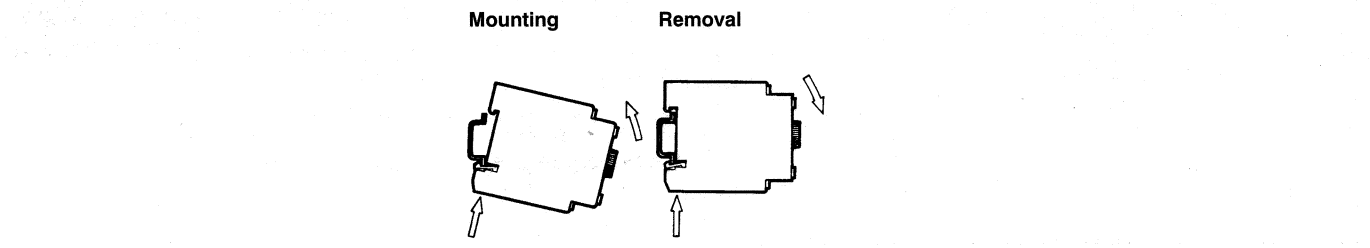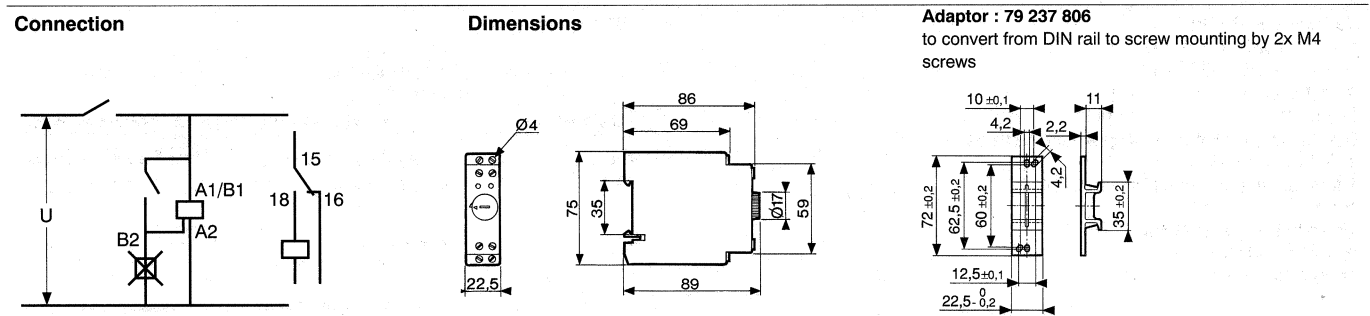

**To order, specify :**

**Standard products, non stocked**

1 Type     
 2 Part number     
 3 Accessory

Example : M2 U electronic timer - 88 881 006 - Panel adaptor 79 237 806

# M2 DIN rail mounted electronic timers (22.5 mm)

## Relay outputs

- Multi-function or mono-function
- Multi-range (8 ranges)
- Dual-voltage
- 1 changeover 8 A / 250 V
- Display of output states by 2 LEDs
- Wide choice of functions
- Front terminals

## Characteristics

### Accuracy

Repetition accuracy (with constant parameters)		± 0.5 %
Variation according to	0 • 40 °C	± 3 %
VDE 0435	-20 • 60 °C	± 5 %
Min. control pulse		0.02 s
Maximum reset time by de-energisation		0.100 s
Immunity from micro power cuts		<0.02 s
Minimum time on energisation	Ma - Mb - Mc K	1s 1s 1s 0.30s
Minimum time on de-energisation	Ma - Mb - Mc	0.2s 1s 1s

### Output specification

Nominal current	Functions K - R	5 A ~ 1 A ~
	Other functions	8 A ~ 1 A ~
Nominal voltage		250 V ~
Rated power	Functions K - R	1250 VA - 30 W
	Other functions	2000 VA - 30 W
Maximum admissible current		15 A < 0.01 s
Minimum current		50 mA ~
Electrical life at I max 250 V ~ resistive (cycles)	Function K	10 <sup>5</sup>
	Other functions	1.5 • 10 <sup>5</sup>
Max. permitted number of operations per hour at I max 250 V ~ resistive		360
Mechanical life (operations)		2 x 10 <sup>7</sup>

### Function and use

Display of output state by LED	output in operation	Green LED
	power on	Red LED
Voltage variation		± 15 % Un 127 V-10% 240 V+10%
Maximum absorbed power		1.5 W / 24 V 5 VA / 110-127 V 10 VA / 220-240 V
Temperature limits	Use	-20 °C + 60 °C
	Stored	-30 °C + 70 °C
Insulation according to the standard VDE 0110 - IEC 255 VDE 0435-2021		250 V ~
Protection class according to UTE C 20010 - IEC 529 - DIN 40050		IP40
Conformity to standards IEC 255 VDE 0435-2021		•
Protection from voltage surge (in joules)		2
Connection: by terminal blocks with cable guide and front-access captive screws		•
Terminal capacity : multi or single wire 1 or 2 leads		2.5 mm <sup>2</sup>
Mounting on symmetrical DIN rail 35 mm EN 50022		•
Weight (g)		110

Products currently being replaced by the TR range

## Timing

### Types

#### Part numbers (and voltages)

24 V ~ / 110 • 127 V 50 • 60Hz
24 V ~ / 220 • 240 V 50 • 60Hz
24 V ~ / 50 • 60Hz
110 • 127 V 50 • 60Hz
220 • 240 V 50 • 60Hz
24 • 240 V ~ 50 • 60Hz
N.B. : For 48 V ~ supply
Additional resistor : 560 Ω 2W / 24V ~

### Functions

#### Relay output

#### Nominal current


#### Timing ranges (8 available options)

0.1 s to 1 s	0.4 min to 4 min	1 h to 10 h
1 s to 10 s	1 min to 10 min	6 h to 60 h
6 s to 60 s	6 min to 60 min	
Fixed pulse		

### Function diagrams

### Terminal connections

- A1 - A2 : Supply
- A3 : Bridge (A2 - A3) for 24V supply
- 15 - 16 - 18 : Timed output contact
- B1 - B2 : Control contact
- 15 - 16 - 18 : Instantaneous contact 1
- B2 - B3 - A3 : Instantaneous contact 2
- Galvanic insulation Input-Output




### Accessories

Panel adaptor **79 237 806**

### Function diagrams


#### Function D Flip-flop



#### Function E Flip-flop




#### Function K Delay on de-energisation




#### Function O Delayed safe-guard




#### Function R Instantaneous relay



#### Function S Star-delta



(1) B2 B3  
• • 0,1s  
— 0,035s

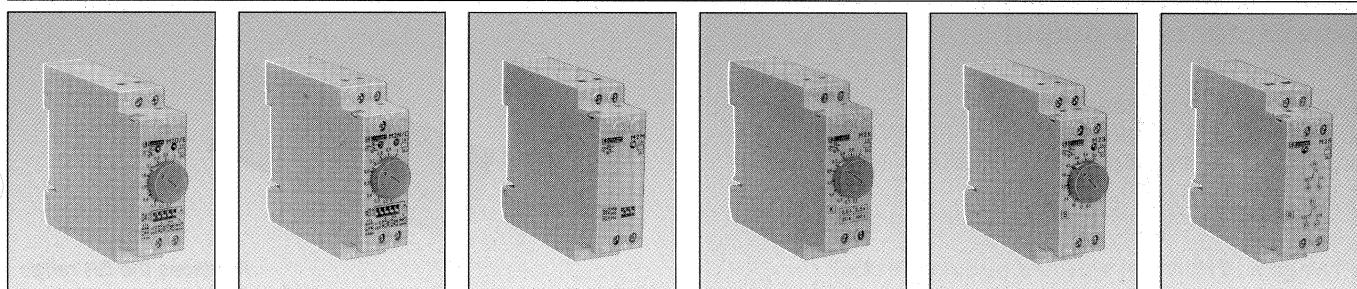


0.1 s • 60 h	0.1 s • 60 h	—	0.06 s • 160 s	3 s • 60 s	—
M2 D/E	M2 N/O	M2 M	M2 K	M2 S	M2 R
88 883 105	88 883 205	88 883 305	—	88 883 505	—
88 883 106	88 883 206	88 883 306	—	88 883 506	—
—	—	—	—	—	88 883 600
—	—	—	—	—	88 883 602
—	—	—	88 883 408	—	88 883 604
—	—	—	—	—	—
•	•	•	—	•	•

1  
2

Multi-function with selection	Multi-function with selection	Multi-function with selection	Mono-function	Mono-function	Mono-function
D/E	N/O	Ma/Mb/Mc	K	S	R
1 changeover	1 changeover	1 changeover	1 changeover	1 changeover	2 changeover
8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~	8 A ~ 1A ~

•	•	—	0.06 s • 0.6 s 2 s • 20 s	0.25 s • 2.5 s 16 s • 160 s	3 s • 60 s	—
0.5 s ± 0.2						

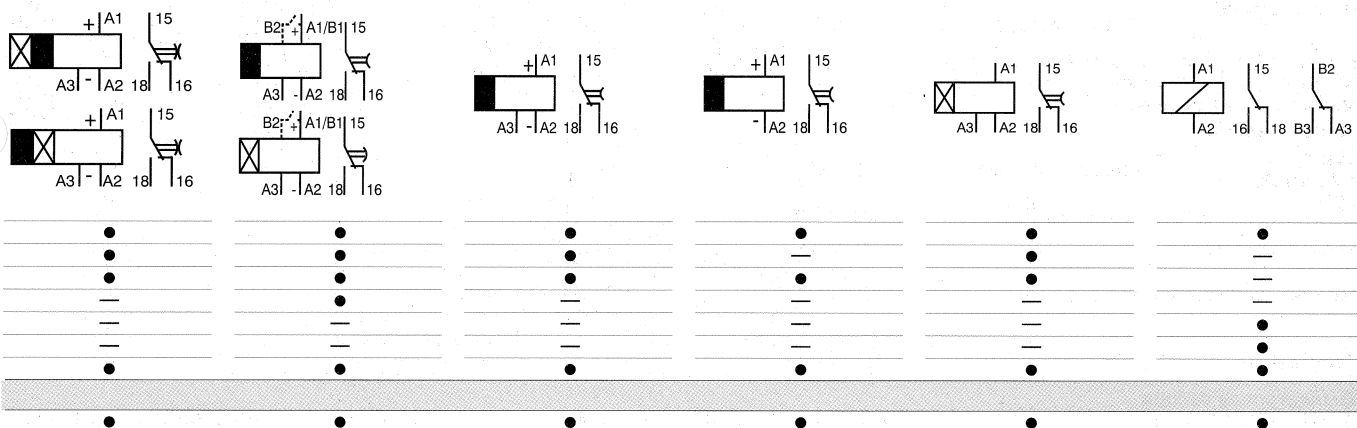

3

**Function N**  
"Safe-guard"

**Function M**  
Pulse output

**Ma**

**Mb**

**Mc**

**Connection**

**Dimensions**

**Mounting**

**Removal**

**Adaptor : 79 237 806**  
To convert from DIN rail to screw mounting by 2 x 4 mm screws.

3

**To order, specify :**

<b>Standard products, non stocked</b>	<b>1</b> Type	<b>2</b> Part number	<b>3</b> Accessory
Example : M2 D/E electronic timer - 88 883 105 - Panel adaptor 79 237 806			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.