

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .



COPYRIGHT 2011

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

C

REV PER ECO-14-017393

04AUG2014

L.L.


S.H.

D

C

B

A

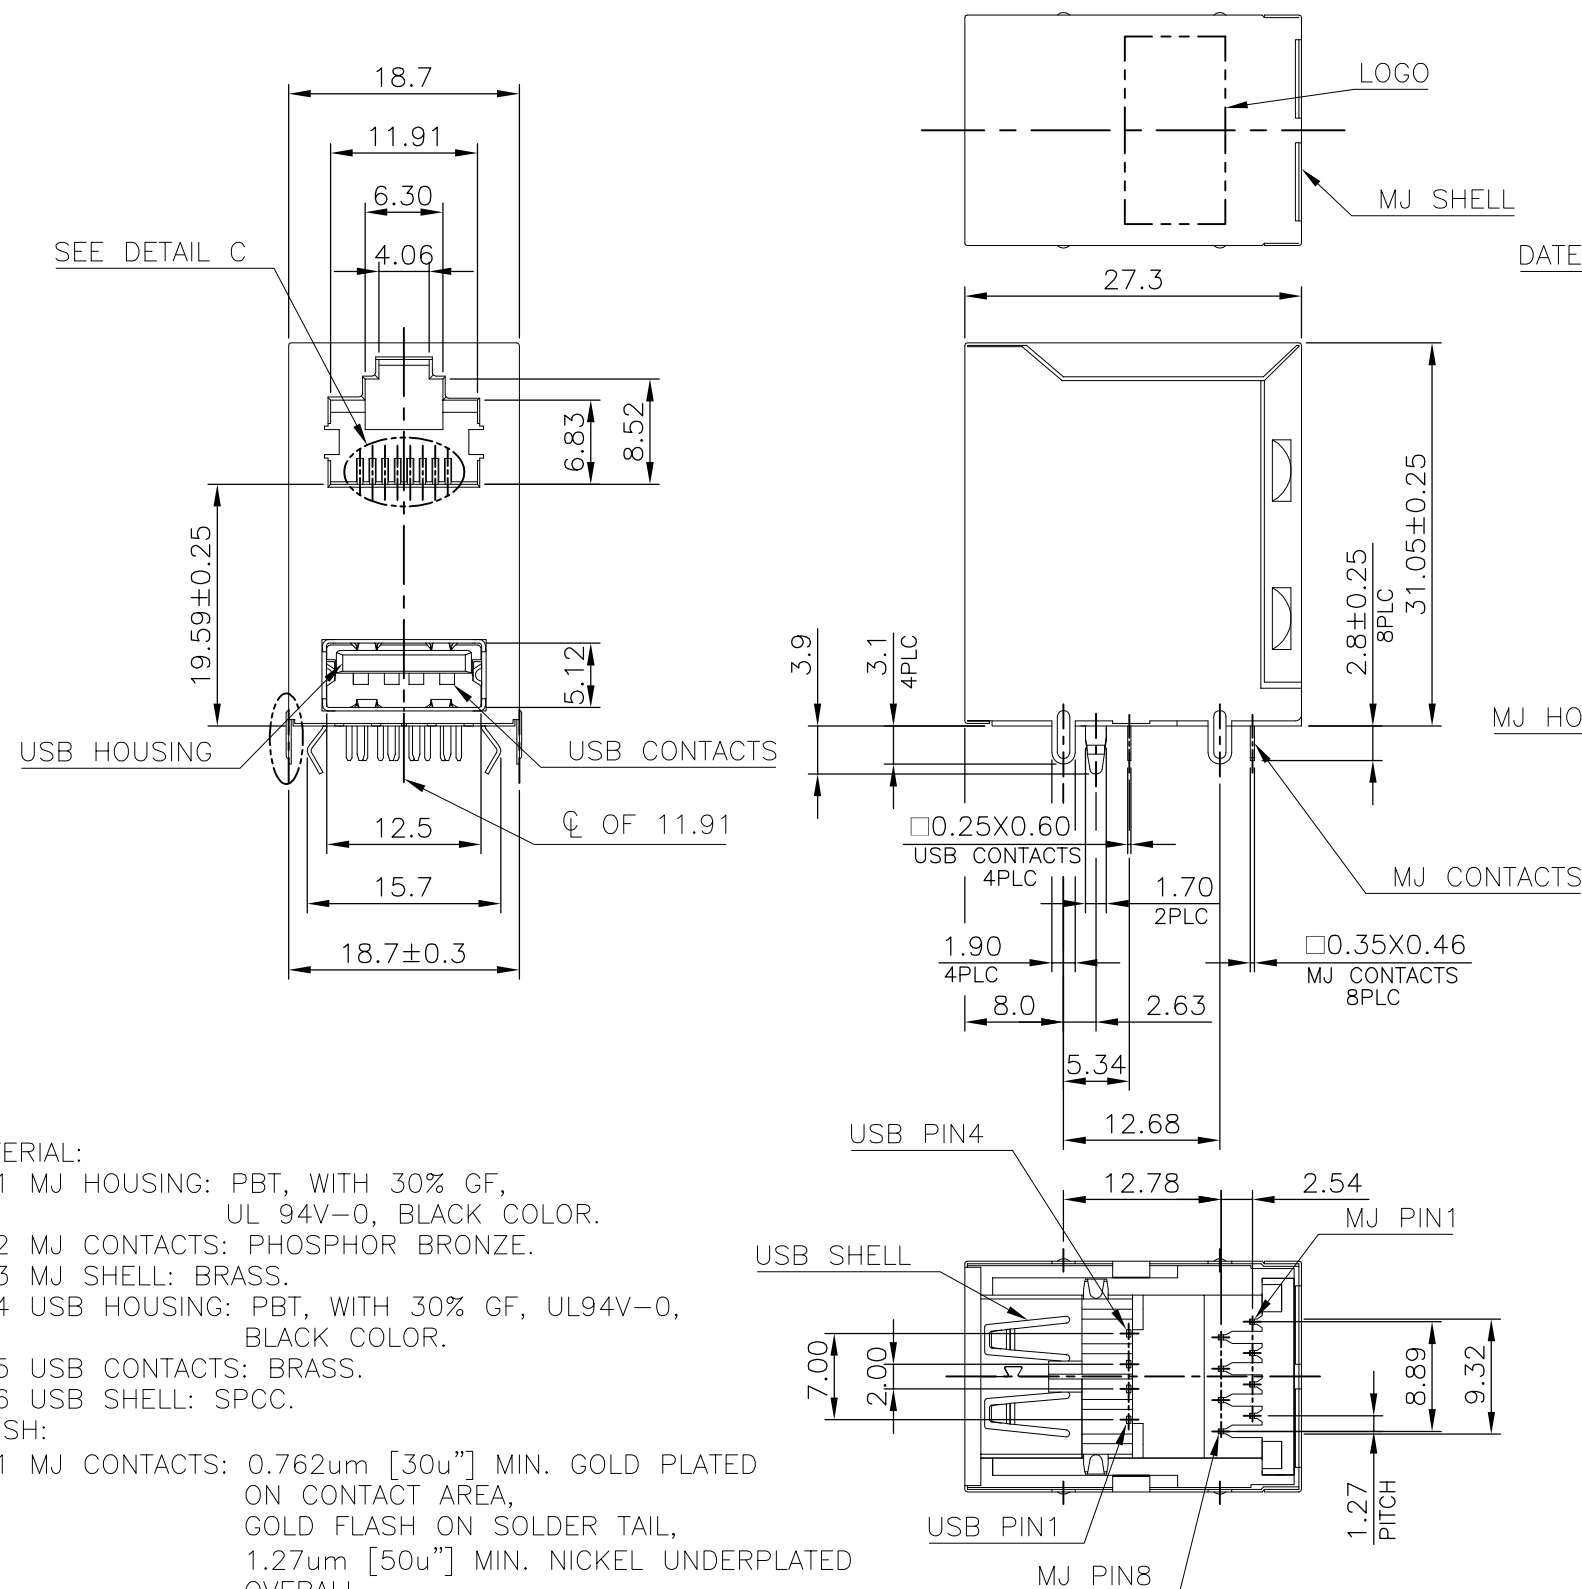

NOTE:

1. MATERIAL:

- 1.1 MJ HOUSING: PBT, WITH 30% GF, UL 94V-0, BLACK COLOR.
- 1.2 MJ CONTACTS: PHOSPHOR BRONZE.
- 1.3 MJ SHELL: BRASS.
- 1.4 USB HOUSING: PBT, WITH 30% GF, UL94V-0, BLACK COLOR.
- 1.5 USB CONTACTS: BRASS.
- 1.6 USB SHELL: SPCC.

2. FINISH:

- 2.1 MJ CONTACTS: 0.762um [30u"] MIN. GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.
 - 2.2 MJ SHELL: 0.508um [20u"] MIN. NICKEL PLATED.
 - 2.3 USB CONTACTS: 0.762um [30u"] MIN. GOLD PLATED ON CONTACT AREA, 2.54um [100u"] MIN. BRIGHT TIN PLATED ON SOLDER TAIL, 1.27um [50u"] MIN. NICKEL UNDERPLATED OVERALL.
 - 2.4 USB SHELL: 2.032um [80u"] MIN. NICKEL PLATED.
3. WAVE SOLDER CAPABLE TO 265°C PER TE SPE 109-202, CONDITION B.

DATE CODE

MJ HOUSING

MJ CONTACTS

DETAIL D
SCALE 2:1DETAIL C
SCALE 2:1CONNECTOR
OUTLINEØ2.30
6PLC

Ø OF 13.14

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm.
TOLERANCE: ±0.05 (TOP VIEW)


1909119-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE

DWN B. HSING 08JUN2008

CHK S. CHIEN 08JUN2008

APVD W. KODAMA 08JUN2008

PRODUCT SPEC

108-57900

APPLICATION SPEC

WEIGHT 14.19 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

MODULAR JACK CONNECTOR OVER USB CONNECTOR
STACKED, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1909119

SCALE

SHEET

1 OF 6

REV

C

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-.



COPYRIGHT 2011

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

D

D

C



C

B

B

A





A

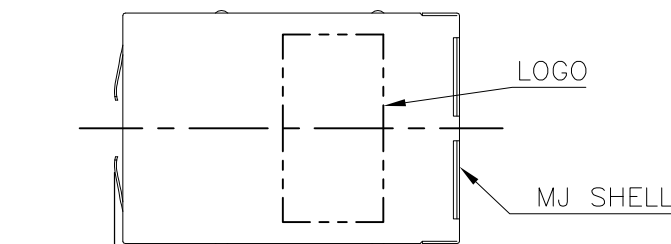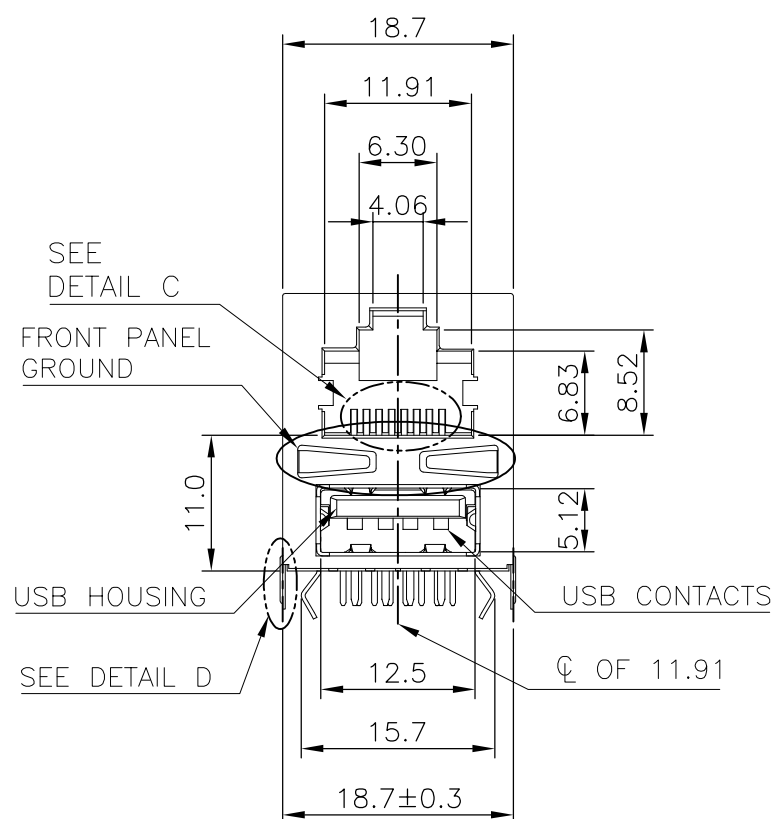

DATE CODE

MJ HOUSING

MJ CONTACTS

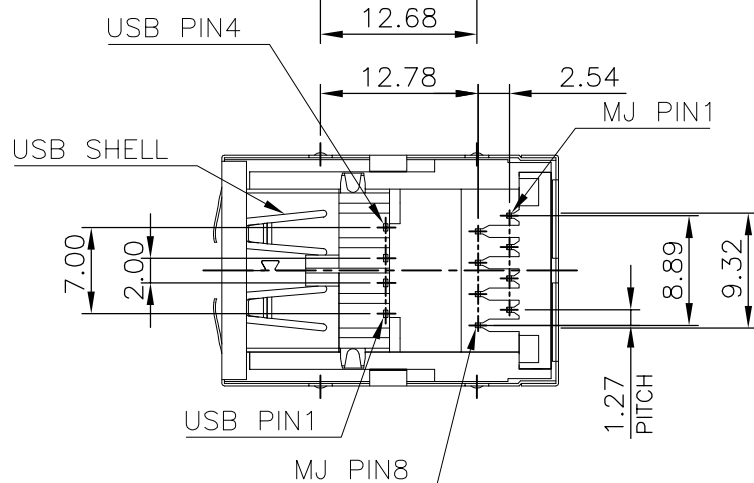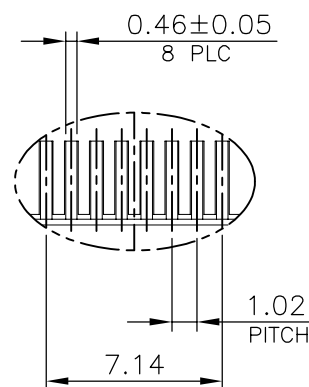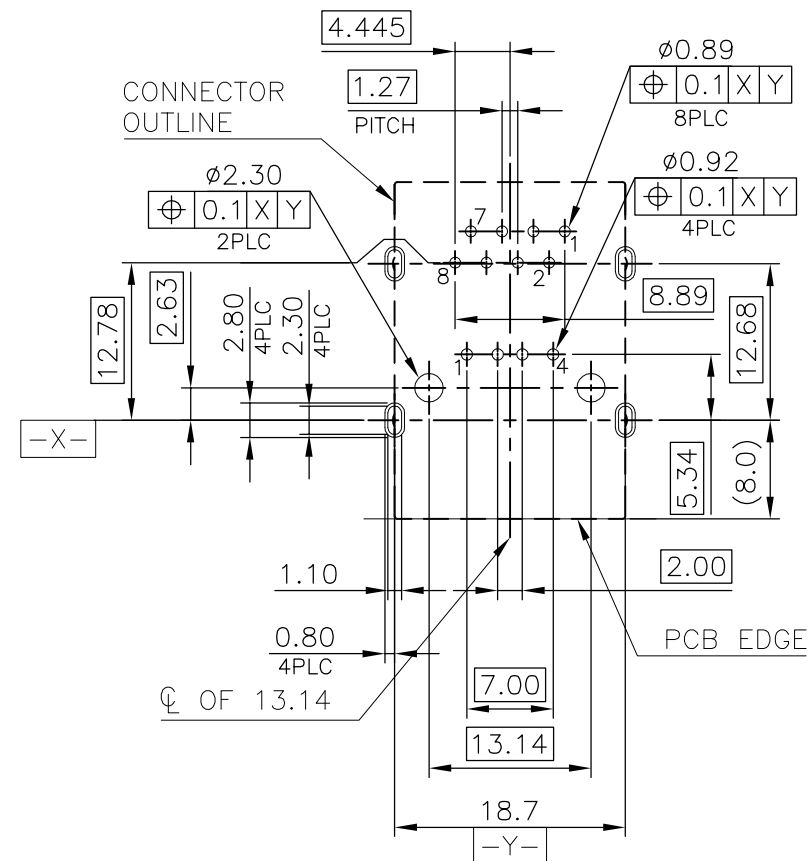DETAIL D
SCALE 2:1DETAIL C
SCALE 2:1

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm.
TOLERANCE: ±0.05 (TOP VIEW)

1909119-4

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC


WEIGHT

12.09 GRAMS

CUSTOMER DRAWING

DIMENSIONS:

mm



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE



TE Connectivity

NAME

MODULAR JACK CONNECTOR OVER USB CONNECTOR
STACKED, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1909119

SCALE

SHEET

2 OF 6

REV

C

4







3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .
© COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

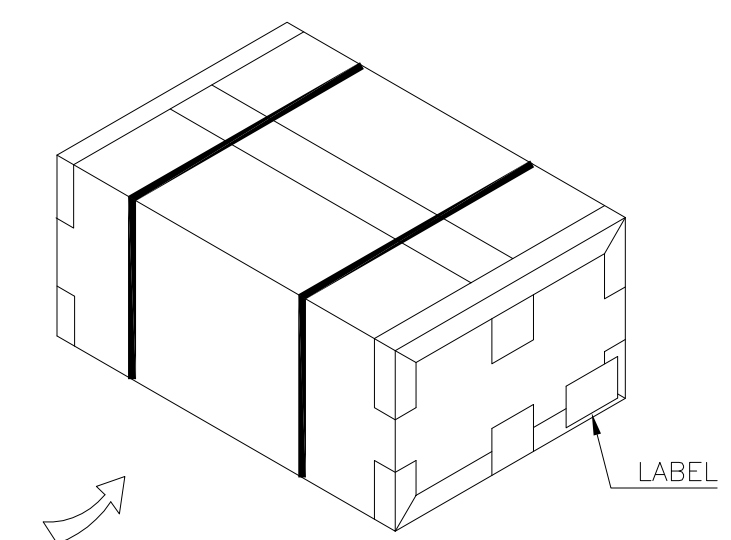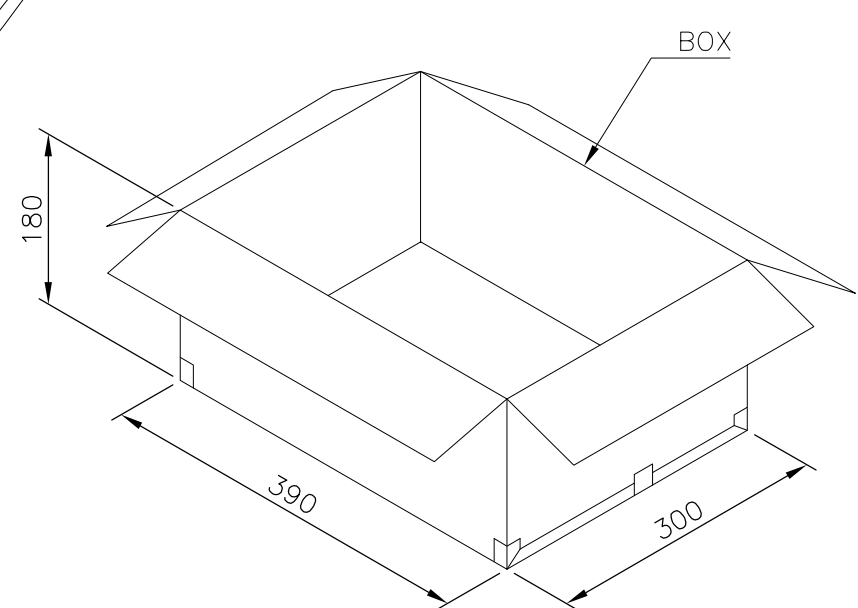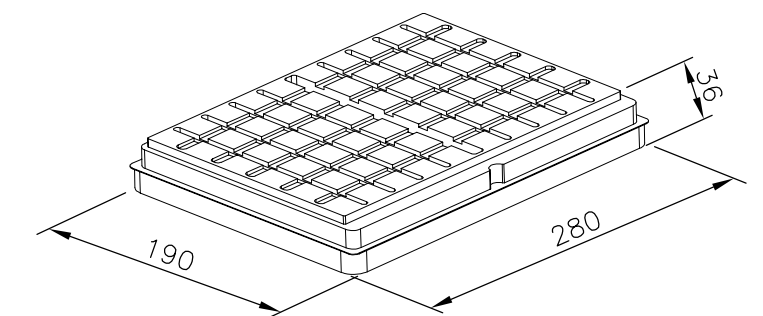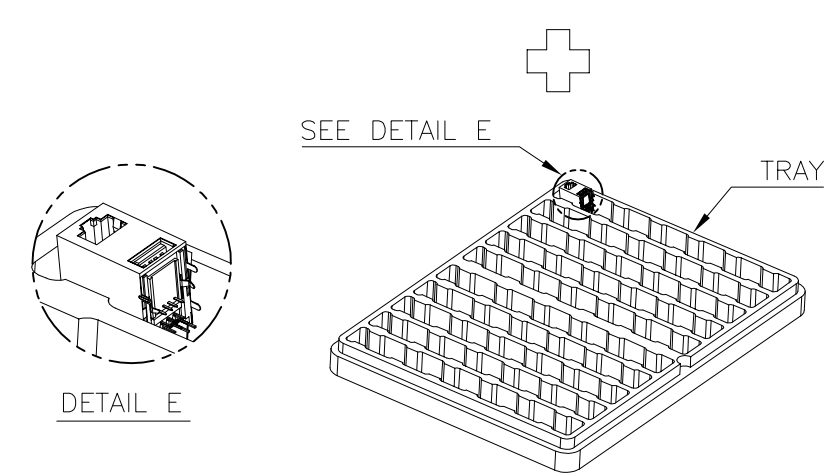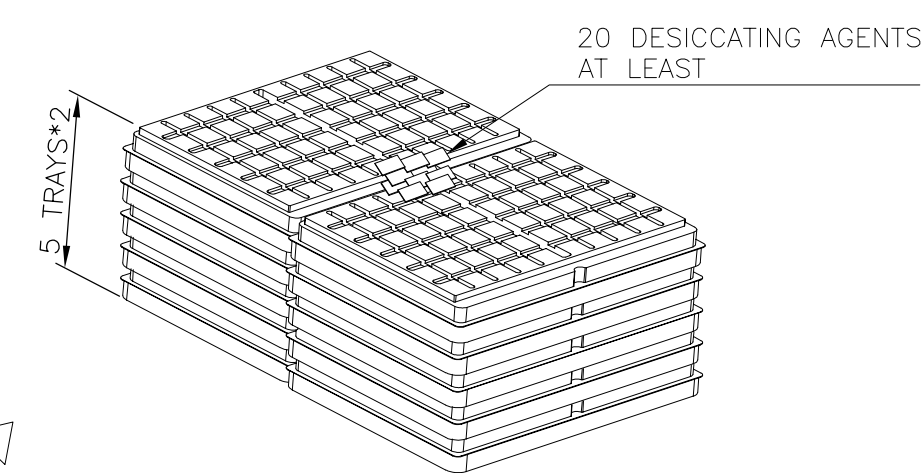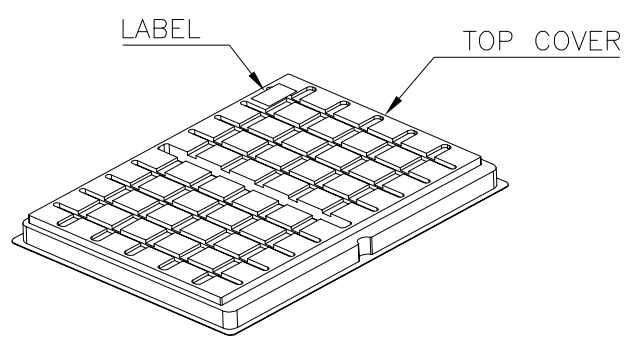

NOTE:
1. MATERIAL:
1.1 TRAY & TOP COVER: PET.
1.2 BOX: CORRUGATED PAPER.
2. EACH BAG SHALL BE INCLUDED:
*DESICCANT

9.10KG	7.10KG	50	10	500	1909119-1
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ BOX	PCS/ BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS: mm		CHK			
		APVD	NAME		
		PRODUCT SPEC	MODULAR JACK CONNECTOR OVER USB CONNECTOR STACKED, DIP TYPE		
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	A3	00779	C=1909119
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING	SCALE	SHEET	REV
0 PLC ± -				5 OF 6	C
1 PLC ± 0.3					
2 PLC ± 0.2					
3 PLC ± 0.15					
4 PLC ± -					
ANGLES ± 3°					
FINISH					

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .



COPYRIGHT 2011

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

LABEL

TOP COVER

20 DESICCATING AGENTS
AT LEAST

5 TRAYS*2

SEE DETAIL E

TRAY

DETAIL E

BOX

LABEL

180

390

300

190

280

36

NOTE:

1. MATERIAL:

1.1 TRAY & TOP COVER: PET.

1.2 BOX: CORRUGATED PAPER.

2. EACH BAG SHALL BE INCLUDED:

*DESICCANT

8.60 KG	6.55 KG	50	10	500	2-1909119-4
8.60 KG	6.55 KG	50	10	500	1-1909119-4
8.00 KG	6.05 KG	50	10	500	1909119-4
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ BOX	PCS/ BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±0.3
2 PLC ±0.2
3 PLC ±0.15
4 PLC ±
ANGLES ±3°

FINISH



TE Connectivity

NAME

MODULAR JACK CONNECTOR OVER USB CONNECTOR
STACKED, DIP TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1909119

SCALE

SHEET

6 OF 6

REV

C



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.