



DIGI XBEE TO IP
GATEWAY WITH CLOUD
MANAGEMENT SERVICES



DIGI XBEE® INDUSTRIAL GATEWAY

Programmable gateway connects Digi XBee enabled devices
to remote applications over Cellular or Ethernet

The Digi XBee Industrial Gateway is a rugged Digi XBee to IP solution. Ideal for any environment, the gateway has an extended temperature range and rugged enclosure.

The Digi XBee Industrial Gateway, features scalable remote configuration and management of Digi XBee networks. By default, all Digi XBee data sent to the gateway is automatically available to online applications via Digi Remote Manager®. With a simple, open-source Python development environment, this gateway also enables custom applications to run locally while interfacing across existing Ethernet or Cellular networks for WAN connectivity to cloud-based applications.

Digi XBee Gateway products can be managed remotely via Digi Remote Manager, supporting features like remote firmware upgrades, configuration changes and event alarms. With Digi Remote Manager, users can scale their network from a single device to hundreds of thousands of remote devices.

BENEFITS

- Open-source Python environment for custom application development on the gateway
- Out-of-box integration with Digi Remote Manager® enables remote connectivity, configuration and management of Digi XBee networks
- Zigbee enabled for connection to local wireless devices
- Cellular and Ethernet WAN options for flexible broadband connectivity
- Can be deployed in any environment due to industrial temp range and rugged enclosure

RELATED PRODUCTS



Modules



Adapters



Development
Kits




Digi Remote
Manager®



Digi Design
Services

APPLICATION EXAMPLE

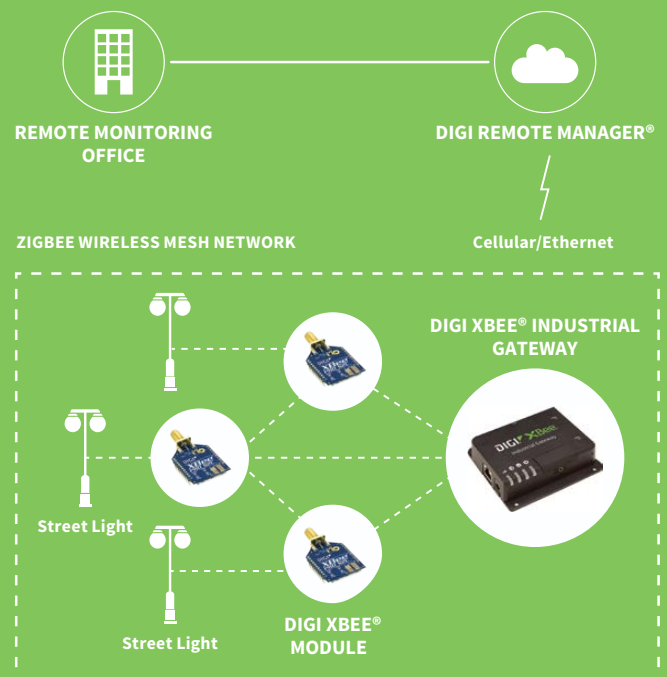

SPECIFICATIONS	Digi XBee® Industrial Gateway	Digi XBee® Industrial Cellular Gateway
GENERAL		
MANAGEMENT	Secure enterprise management via Digi Remote Manager®	
PROTOCOLS	UDP/TCP, DHCP	
LEDS	Cellular Signal Strength, Network (LAN/WAN), ZigBee (Wireless LAN), Power	
SECURITY	TLS 1.2, Cellular network security	
WWAN		
3G HSPA+, BANDS	N/A	B5(850), B8(900), B2(1900), B1(2100), B4(AWS)
LTE CATEGORY 1	N/A	Verizon: Bands 2, 4, 13 AT&T, T-Mobile: B2(1900), B4(AWS1700), B5(850), B12/B12(700)
ANTENNA CONNECTORS	N/A	HSPA+ version: 1 x 50 Ω SMA (Center pin: female); LTE version: 2 x 50 Ω SMA (Center pin: female)
SIM SLOTS	N/A	2 x 2FF SIM Slots; second SIM slot reserved for future use
SIM SECURITY	N/A	Screw-down SIM cover
SOFTWARE & MANAGEMENT		
PYTHON	2.7.1	
MEMORY FREE SPACE	20MB RAM and 20MB Flash for Python applications	
XBEE GATEWAY APPLICATION	Wireless LAN data sent to the gateway is automatically available to online applications via Digi Remote Manager	
ZIGBEE		
ZIGBEE STACK	ZigBee Standard and ZigBee PRO versions available	
ZIGBEE MODULE	Standard: Digi XBee ZB SMT (S2C); PRO: Digi XBee Pro ZB SMT (S2C)	
ZIGBEE	Standard: Transmit power 6.3 mW (+8 dBm); Receiver sensitivity: -102 dBm PRO: Transmit Power 63mW (18dBm): Receiver sensitivity: -102dBm	
ZIGBEE ANTENNA	1 x 50 Ω SMA (Center pin: female)	
ETHERNET		
PORTS	1 RJ-45 port	
PHYSICAL LAYER	10/100Base-T	
DATA RATE	10/100 Mbps (auto-sensing)	
MODE	Full or half duplex (auto-sensing)	
INTERFACE	Auto MDI/MDIX	
ROUTING	Ethernet port designed for configuration and WAN backhaul	
PHYSICAL		
DIMENSIONS (L X W X H)	7.62 cm x 10.16 cm x 2.54 cm (3 in x 4 in x 1 in)	
WEIGHT	0.5 lb (.22 kg)	
ENCLOSURE MATERIAL/RATING	Industrial (Metal)/IP30	
POWER REQUIREMENTS		
POWER INPUT	5VDC +/- 5%; Digi approved power supply must be used	
POWER SUPPLY	See accessory options	
POWER CONSUMPTION	Typical 1.2 W, Max 2.5 W	Typical 3.5 W; Max 11 W
ENVIRONMENTAL		
OPERATING TEMPERATURE	-30° C to 70° C (-22° F to 158° F)	-30° C to +70° C (-22° F to +158° F) Reduced performance above 60° C
RELATIVE HUMIDITY	5% to 95% (non-condensing)	
APPROVALS		
GSM/UMTS	PTCRB	
CELLULAR CARRIERS	Verizon, AT&T, Certified by most major international carriers	
SAFETY	IEC 60950-1:2005; EN 60950-1:2006; SCA C22.22 No. 60950-1	
EMISSIONS/IMMUNITY	FCC Part 15b, Industry Canada (IC), CE Mark	
WARRANTY		
PRODUCT WARRANTY	5 years	

PART NUMBERS	DIGI XBEE® INDUSTRIAL GATEWAY
XGI-20CZ7-E00-W0	Digi XBee Industrial Gateway - ZigBee to Ethernet, power supply and antenna not included
XGI-20CZ7-EU7-W0	Digi XBee Industrial Gateway - ZigBee to HSPA+, power supply and antenna not included
XGI-2PCZ7-E00-W0	Digi XBee Industrial Gateway - ZigBee Pro to Ethernet, power supply and antenna not included
XGI-2PCZ7-EL1-W0	Digi XBee Industrial Gateway - ZigBee Pro to CAT 1, power supply and antenna not included

PART NUMBERS	ACCESSORIES
76000976	Kit, Digi TransPort 9-30V DC/DC adapter
76002021	Power supply, 5V barrel plug, wall plug in, commercial range
76000965	Kit, Digi TransPort WR11 XT power supply Int, industrial temperature range

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004218
A1/1217

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.