

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850480074

Status:


Active

Overview:

din_41612

Description:

2.54mm (.100") Pitch DIN 41612/IEC 603-2 Mixed Layout Connector, Through Hole, Vertical, Female Style M, 48 Circuits, Lead free

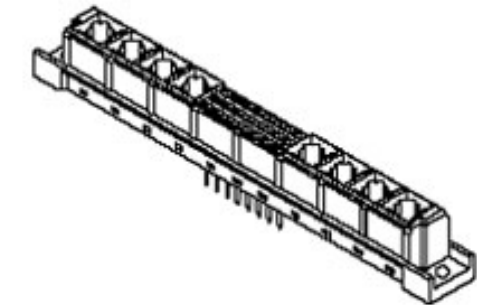

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Backplane Connectors
Series	85048
Application	Backplane
Comments	Mixed Layout
Component Type	PCB Receptacle
Overview	din_41612
Product Name	IEC 603-2/DIN 41612
Style	M

Physical

Circuits (Loaded)	48
Circuits (maximum)	48
Circuits Detail	Rows A, B & C
Durability (mating cycles max)	400
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Columns	14
Number of Pairs	Open Pin Field
Number of Rows	3
Orientation	Vertical
PC Tail Length (in)	0.177 In
PC Tail Length (mm)	4.50 mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Carton
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Pitch - Term. Interface (in)	0.100 In
Pitch - Term. Interface (mm)	2.54 mm
Plating min: Mating (µin)	24
Plating min: Mating (µm)	0.60
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +125°C
Termination Interface: Style	Through Hole

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
85048Series

Mates With
DIN 41612/EIC 603-2 Mixed Layout
Connector 85009 , 85017

Use With
85022 DIN 41612 High Current Contact

Electrical

Current - Maximum per Contact	1A
Data Rate	622.0 Mbps
Real Signals (per 25mm)	30
Voltage - Maximum	250V AC (RMS)




Material Info

Reference - Drawing Numbers

Packaging Specification	PK-85048-001
Sales Drawing	SD-85048-0003, SD-85048-0074

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

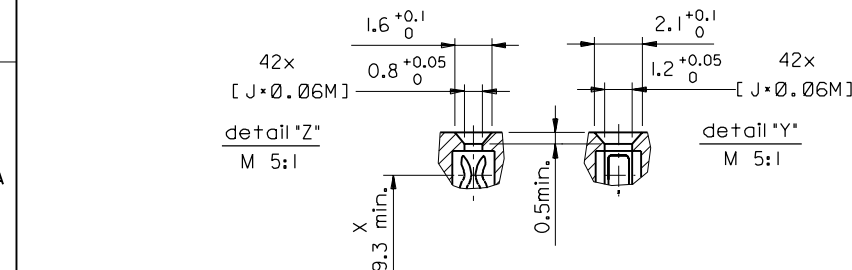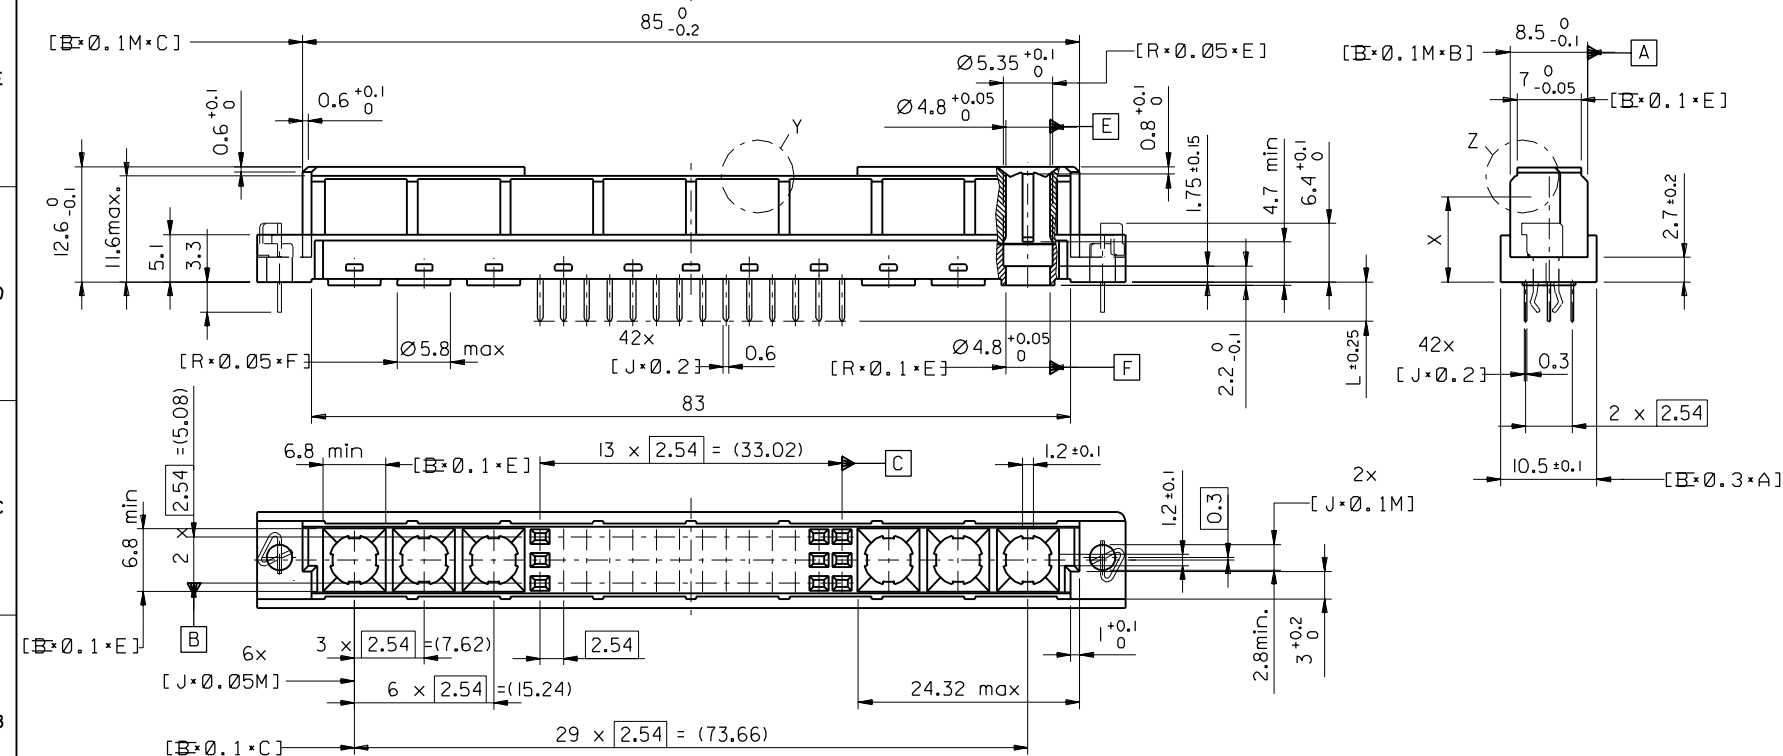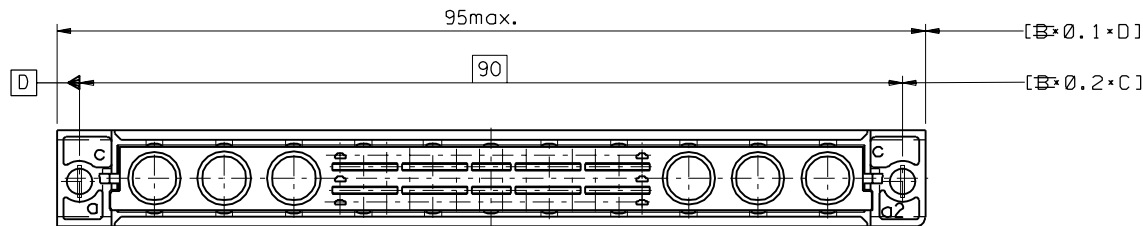

FIRST ANGLE PROJECTION

REVISE ONLY ON CAD SYSTEM

SH. REV.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR $\pm 2^\circ$

DRWG BY
KN

CAD/CAM PROJECT NAME
85048000
831

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

3 PLACE $\pm$ $\pm$

CHK'D BY
Ca

TITLE
42 pol. Federleiste
42 pos. female connector
DIN 41612, style M

2 PLACE $\pm$ $\pm$

APP'D BY
JB

MOLEX EUROPE

1 PLACE $\pm$ $\pm$

SCALE
2:1

SHEET NO. DATE
1 OF 2 97/04/10

DESIGN DIMENSION ☒ MM

EQUIVALENT DIMENSION ☐ MM

PART NO. DWG NO. SD-85048-0003

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS
THE DESIGN DIMENSION, LOWER IS SECONDARY

SIZE
B

SIZE
B



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.