



T H E R M O M E T R I C S
A C O M M I T M E N T T O E X C E L L E N C E

NTC Interchangeable Thermistor Series Type SC



Features

- Precision, solid state temperature sensor
- Epoxy filled sleeve for controlled diameter
- Interchangeability down to $\pm 0.18^{\circ}\text{F}$ ($\pm 0.10^{\circ}\text{C}$)
- Suitable for use over the range of:
-40°F to 221°F (-40°C to 105°C)
- High sensitivity greater than:
-4%/°C at 77°F (25°C)
- Most popular Resistance (R) vs Temperature (T) curves are available
- Suitable for temperature measurement, control and compensation
- Ideal for medical applications
- Fully insulated
- Polyimide sleeved for good mechanical strength and resistance to solvents
- 0.008 in (0.2 mm) diameter heavy isomid insulated bifilar copper lead wires for SC50
- 0.004 in (0.1 mm) diameter heavy isomid insulated bifilar nickel lead wires for SC30

Amphenol
Advanced Sensors

Type SC30

Specifications

NTC Interchangeable Type SC30

Polyimide sleeved, interchangeable chip thermistors with heavy isomid insulated nickel lead-wires.

Options

Consult Factory for Availability of Options

- Other resistance values in the range of 1000 Ω to 100 k Ω
- Other tolerances or ranges
- Alternative lead wires or lengths
- Non standard R vs T curves
- Controlled dimensions

Thermal and Electrical Properties

Dissipation Constant

Still air: 0.4 mW/ $^{\circ}$ C
 Stirred oil: 3 mW/ $^{\circ}$ C

Thermal Time Constant

Still air: 5 seconds
 Stirred oil: 0.3 seconds

Maximum Power at 77°F (25°C)

~30 mW

De-rated from 100% at 77°F (25°C) to 0% at 212°F (100°C)



NTC Interchangeable Type SC30 dimensions

Ordering Information

Select appropriate part number below for resistance and temperature tolerance desired.

| $R_{25^{\circ}\text{C}}$ | Material System | $\pm 0.18^{\circ}\text{F}$ ($\pm 0.1^{\circ}\text{C}$) 32°F to 158°F (0°C to 70°C) | $\pm 0.36^{\circ}\text{F}$ ($\pm 0.2^{\circ}\text{C}$) 32°F to 158°F (0°C to 70°C) |
|--------------------------|-----------------|--|--|
| 2252 | F | SC30F232V | SC30F232W |
| 3000 | F | SC30F302V | SC30F302W |
| 5000 | F | SC30F502V | SC30F502W |
| 10000 | F | SC30F103V | SC30F103W |
| 10000 | Y | SC30Y103V | SC30Y103W |
| 30000 | H | SC30H303V | SC30H303W |
| 50000 | G | SC30G503V | SC30G503W |
| 100000 | Y | SC30Y104V | SC30Y104W |
| 100000 | G | SC30G104V | SC30G104W |

Notes:

1. For RoHS compliant product, please add the suffix "N" to the part label. *Example: SC30F103VN*
2. For RoHS compliant product with applications below 0°C, please add the suffix "H" to the part label. *Example: SC30F103VH*

Type SC50 Specifications

NTC Interchangeable Type SC50

Polyimide sleeved, interchangeable chip thermistors with heavy isomid insulated copper lead wires.

Options

Consult Factory for Availability of Options.

- Other resistance values in the range of 1000 Ω to 100 k Ω
- Other tolerances or ranges
- Alternative lead wires or lengths
- Non standard R vs T curves
- Controlled dimensions

Thermal and Electrical Properties

Dissipation Constant

Still air: 0.5 mW/ $^{\circ}$ C
Stirred oil: 0.4 mW/ $^{\circ}$ C


Thermal Time Constant

Still air: 8 seconds
Stirred oil: 0.5 seconds

Maximum Power at 77°F (25°C)

~50 mW

De-rated from 100% at 77°F (25°C) to 0% at 212°F (100°C)

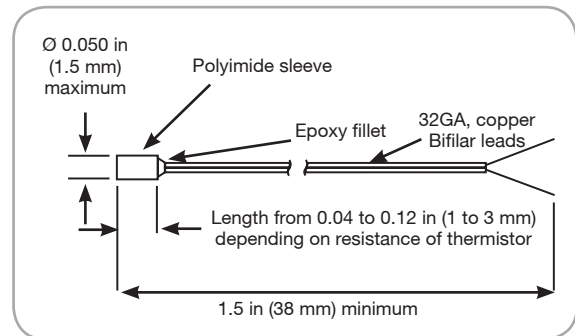

NTC Interchangeable Type SC50 dimensions

Ordering Information

Select appropriate part number below for resistance and temperature tolerance desired.

| R _{25°C} | Material System | ±0.18°F (±0.1°C) 32°F to 158°F (0°C to 70°C) | ±0.36°F (±0.2°C) 32°F to 158°F (0°C to 70°C) |
|-------------------|-----------------|--|--|
| 2252 | F | SC50F232V | SC50F232W |
| 3000 | F | SC50F302V | SC50F302W |
| 5000 | F | SC50F502V | SC50F502W |
| 10000 | F | SC50F103V | SC50F103W |
| 10000 | Y | SC50Y103V | SC50Y103W |
| 30000 | H | SC50H303V | SC50H303W |
| 50000 | G | SC50G503V | SC50G503W |
| 100000 | Y | SC50Y104V | SC50Y104W |
| 100000 | G | SC50G104V | SC50G104W |

Notes:

1. For RoHS compliant product, please add the suffix "N" to the part label. *Example: SC50F103VN*
2. For RoHS compliant product with applications below 0°C, please add the suffix "H" to the part label. *Example: SC50F103VH*

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2018 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.
Other company names and product names used in this document are the registered trademarks or
trademarks of their respective owners.

AAS-920-307E - 02/2018

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SC50F103V](#) [SC30Y103W](#) [SC50F103W](#) [SC30F103W](#) [SC30F103V](#) [SC30F103A](#) [SC30F103AN](#) [SC30F103VN](#)
[SC30F103WN](#) [SC30Y103WN](#) [SC50F103WN](#) [SC50F103VN](#) [SC30F232V](#) [SC303F302V](#) [SC30F502V](#) [SC30Y103V](#)
[SC30H303V](#) [SC30G503V](#) [SC30Y104V](#) [SC30G104V](#) [SC30F232W](#) [SC30F302W](#) [SC30F502W](#) [SC30H303W](#)
[SC30Y503W](#) [SC30Y104W](#) [SC30G104W](#) [SC50F232V](#) [SC50F302V](#) [SC50Y103V](#) [SC50H303V](#) [SC50G503V](#)
[SC50Y104V](#) [SC50G104V](#) [SC50F302W](#) [SC50F232W](#) [SC50F502W](#) [SC50Y103W](#) [SC50H303W](#) [SC50Y503W](#)
[SC50Y104W](#) [SC50G104W](#) [SC30Y503V](#) [SC50F502V](#) [SC50F303W](#) [SC50Y503V](#) [SC30F302V](#) [SC30G503W](#)
[SC50G503W](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.