
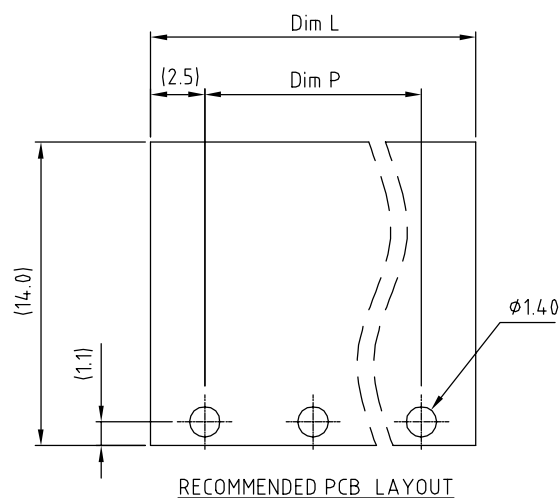
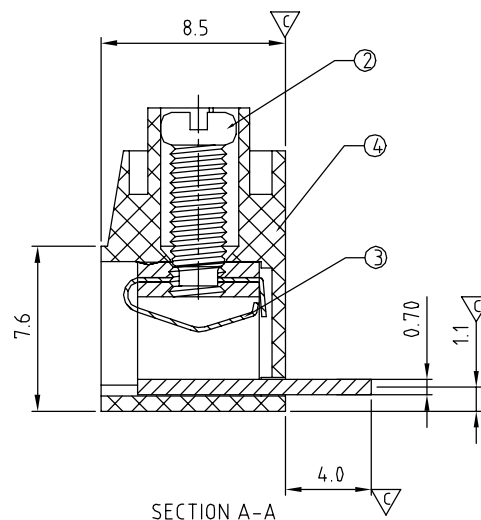
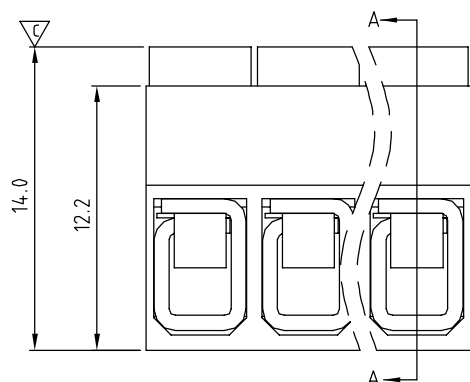


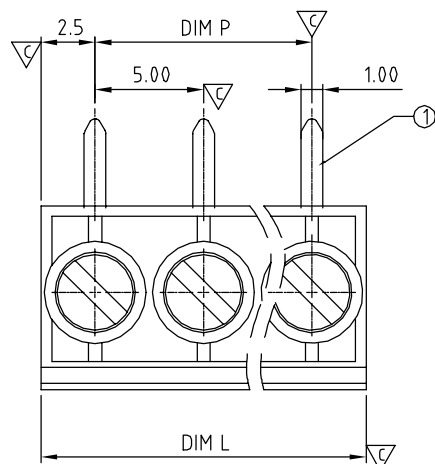

N = Number of poles
 Dim L = N x 5.0
 Dim P = (N - 1) x 5.0

	Dim L	Dim P
2-6p	± 0.15	± 0.10
7-12p	± 0.20	± 0.20
13-18p	± 0.30	± 0.25
19-24p	± 0.40	± 0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	02/02'07	Soldering temperature is changed from 245°C to 250°C	Marivn
△	07/23'07	Voltage rating is changed from 300VAC/10A to 250V/15A	Chen Bo
△	07/23'07	Solid & Stranded wire is changed from 12-20 to 12-22	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item ① Terminal body: Brass stamping, Tin plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Wire guard: PhBz, Tin plated
- Item ④ Terminal (housing): Thermoplastic (UL94V-0)

Electrical cULus

- △ Voltage rating: 250V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-22
 - Stranded wire(AWG): 12-22
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C $\pm$ 10°C/5 Sec
- Safety Approval: cULus
- Critical dimension:

TL xx 05 x 0 xxxx G		
Solid Block		RoHS
02 2 CONTACTS		Pb<40,000ppm
03 3 CONTACTS		0000: "@" Logo
... ..	Color	000A: "ANYTEK" Logo
24 24 CONTACTS	0 Black (RAL9005)	Any special item by customer request, please contact sales department.
	2 Red (RAL3001/D)	
	3 Orange(RAL2011/P)	
	4 Yellow(RAL1018/A)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TL-5.0mm series “-”							
PART NO.	TLxx05x0xxxxG				DWG NO.	8TL0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
			Chen Bo 2011.07.23		UNIT: mm		X.	±0.50
					SCALE: NONE		X.X	±0.30
					REV.: F		X.XX	±0.10
				SHEET: 01/01			X°	±1°

UNIT: mm
 SCALE: NONE
 SHEET: 01/01
 REV.: F



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.