
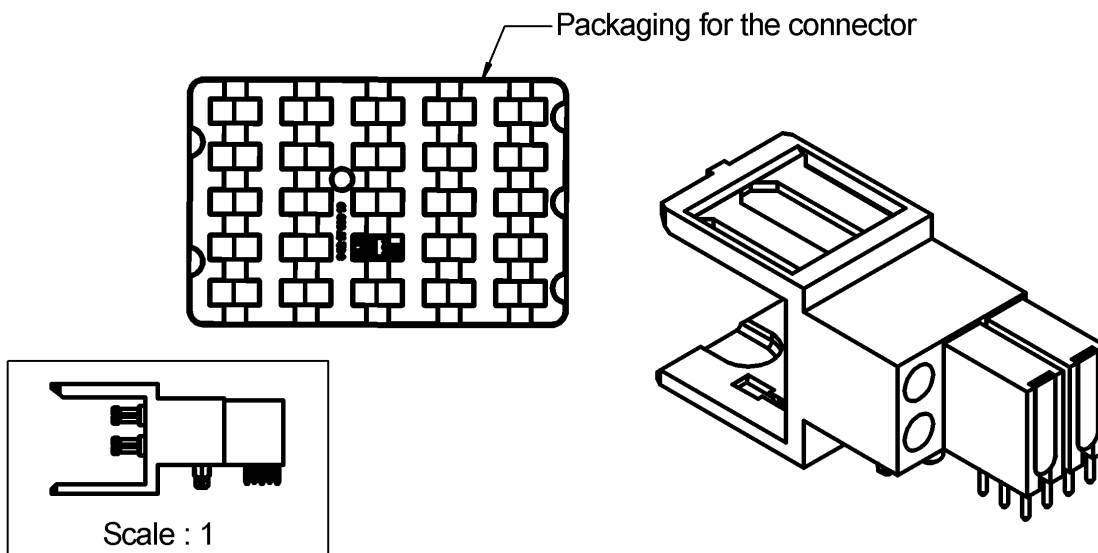


MALE COAXIPACK 6 WAYS 4 RIGHT ANGLE COA


SOLDER TYPE 2.5

R694.251.114

Series : MCC2

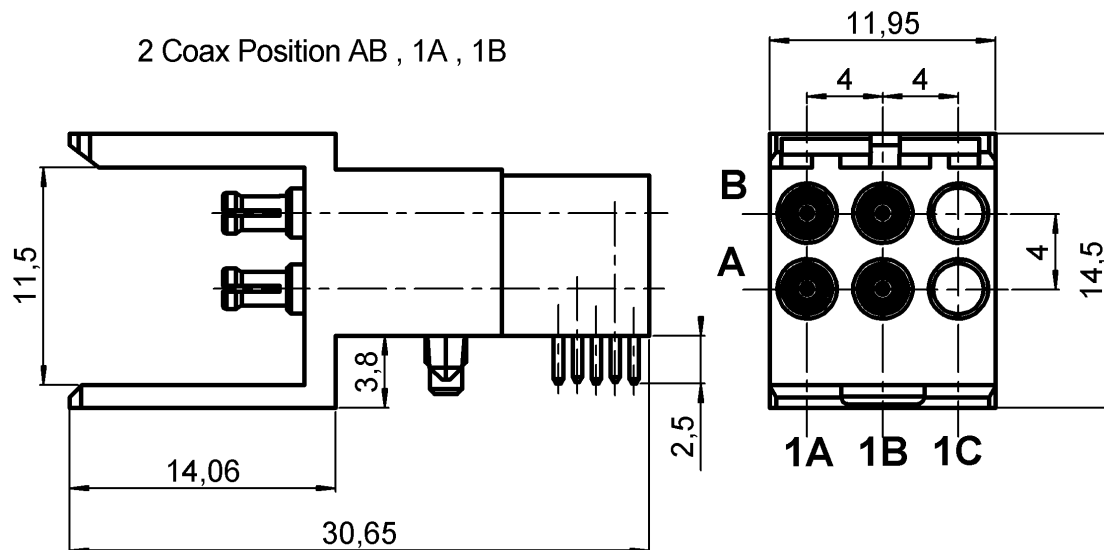

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BRONZE	NPGR
INSULATOR	PEEK , ULTEM	
GASKET	-	-
OTHERS PARTS	LIQUID CRISTAL POLYMER	-
-	-	-
-	-	-

Issue : 0627 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



MALE COAXIPACK 6 WAYS 4 RIGHT ANGLE COA**R694.251.114****SOLDER TYPE 2.5**

Series : MCC2

PACKAGING

Standard	Unit	Other
25	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50 Ω
Frequency	0-6 GHz
VSWR	1.20* + 0,0000 x F(GHz) Maxi
Insertion loss	0.2 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (- F(GHz)) dB Maxi
Voltage rating	500 Veff Maxi
Dielectric withstanding voltage	750 Veff mini
Insulation resistance	5000 M Ω mini

ENVIRONMENTAL

Operating temperature	-25/+125 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHER CHARACTERISTICS

Assembly instruction

Others :
VSWR optimized between DC to 3GHz

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	6 N mini
Axial force – Opposite end	6 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	81,5600 g

Issue : 0627 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




MALE COAXIPACK 6 WAYS 4 RIGHT ANGLE COA

SOLDER TYPE 2.5

R694.251.114

Series : MCC2

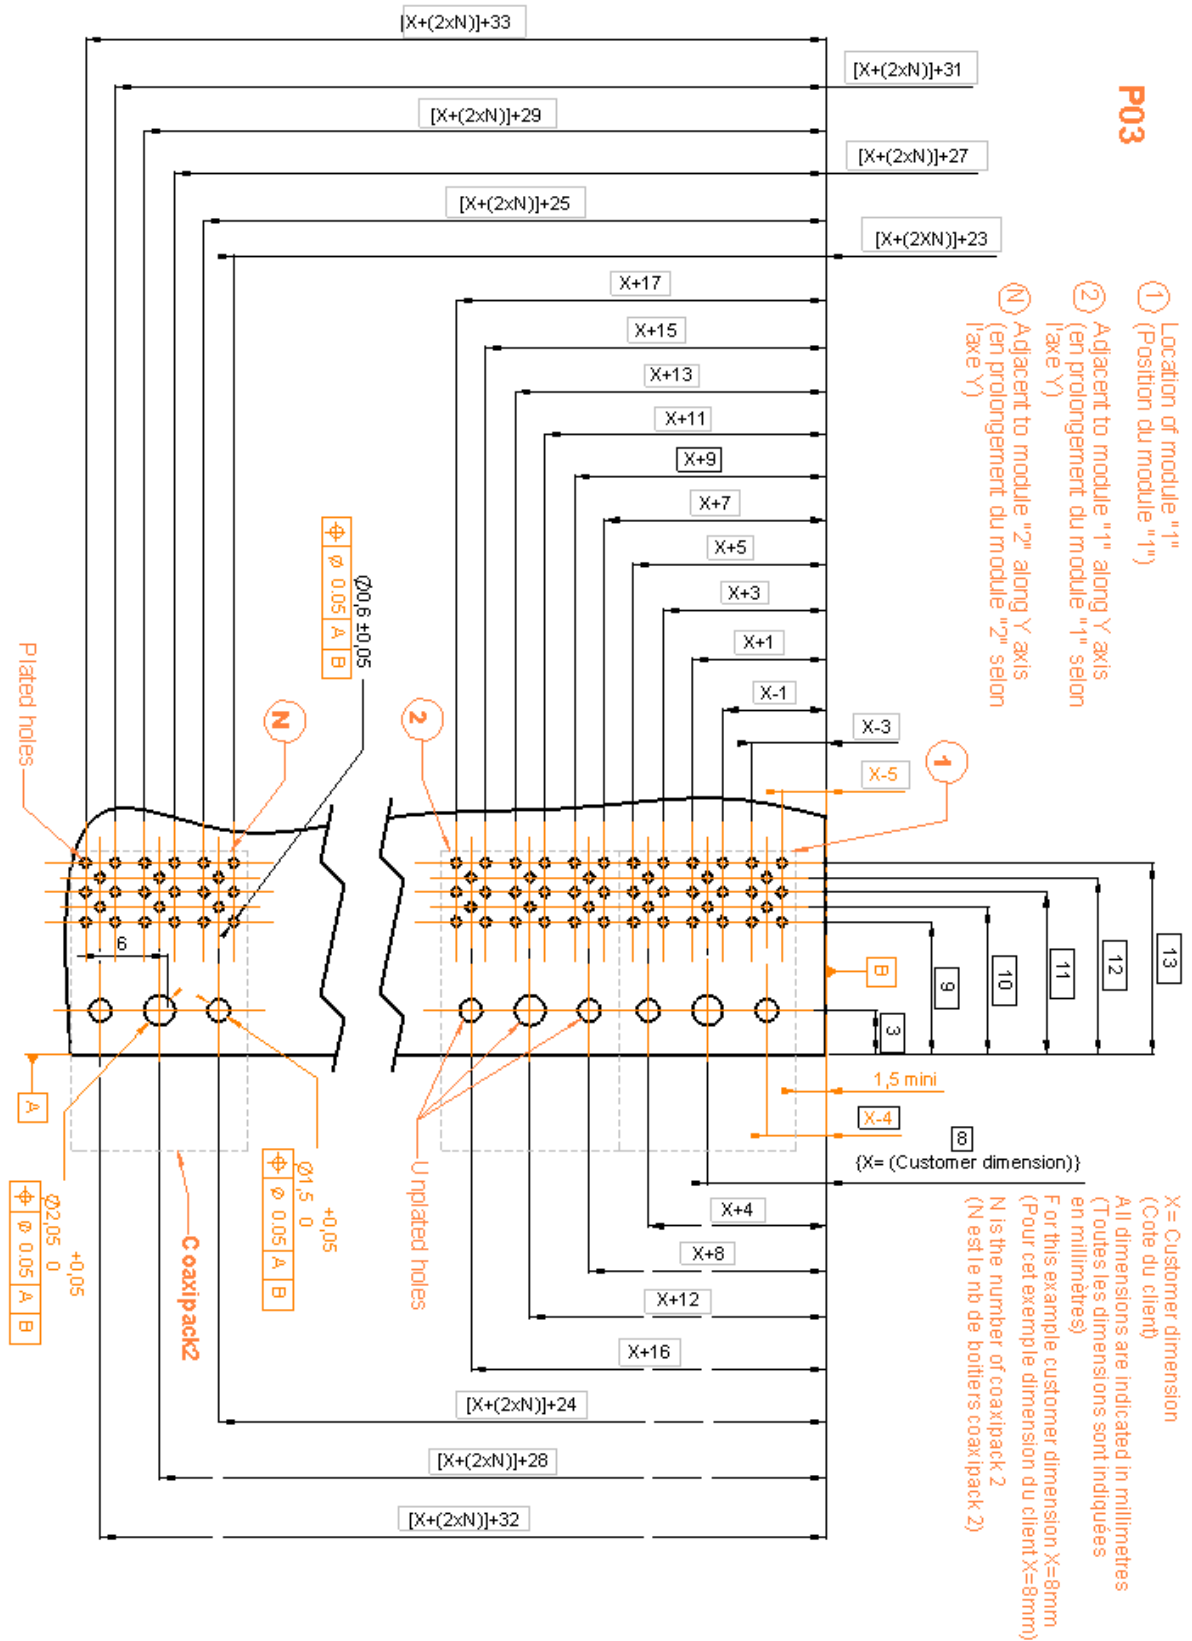

Issue : 0627 B


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL®**


MALE COAXIPACK 6 WAYS 4 RIGHT ANGLE COA**SOLDER TYPE 2.5****R694.251.114**

Series : MCC2


- Place the coax connector on the PCB

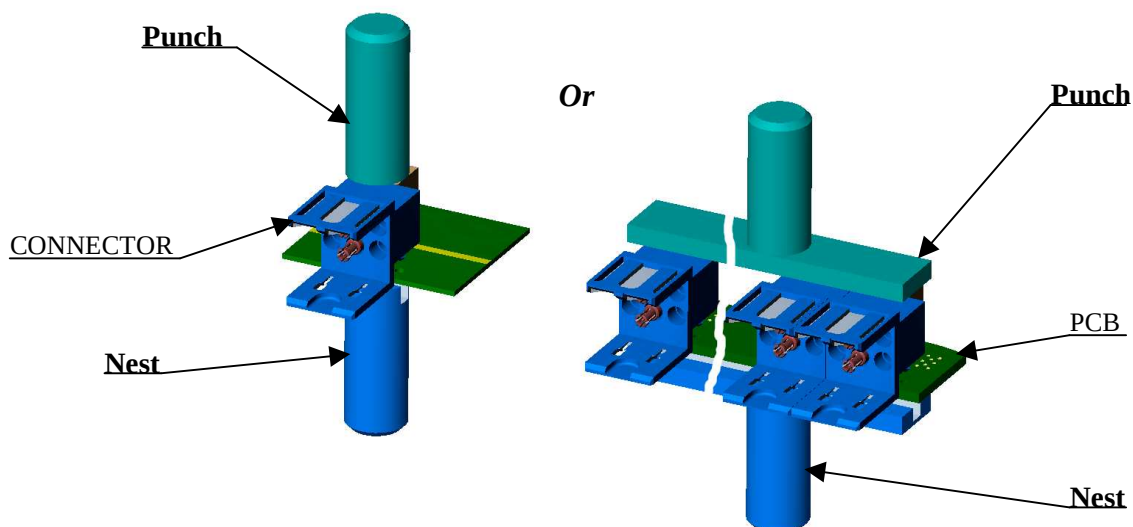

- Place correctly the PCB between the punch and the nest of the press.
- In case of multiple housing configuration, use a punch and a nest large enough to cover all the housings.
- Press on the plastic housing(s) with the punch until the complete insertion of the fixing stud into the PCB.

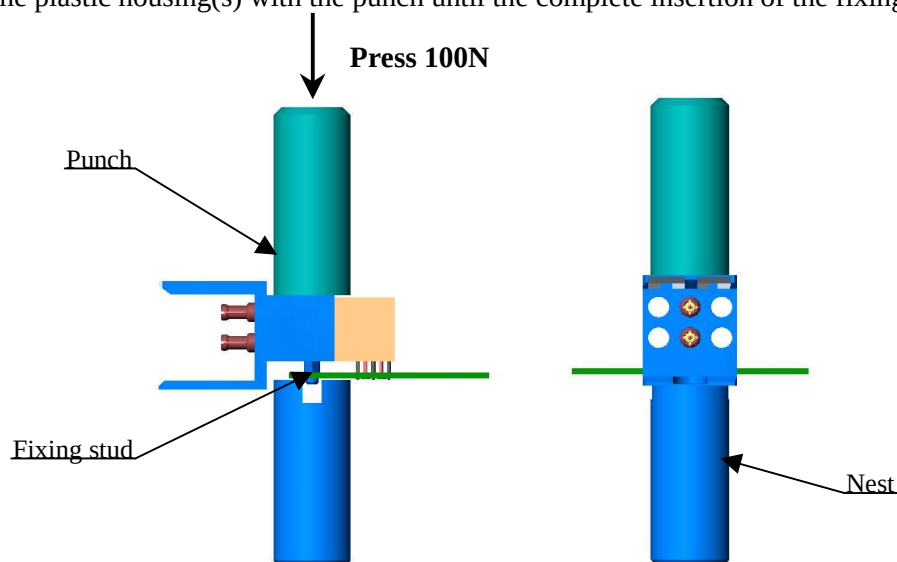

- Solder the legs on board

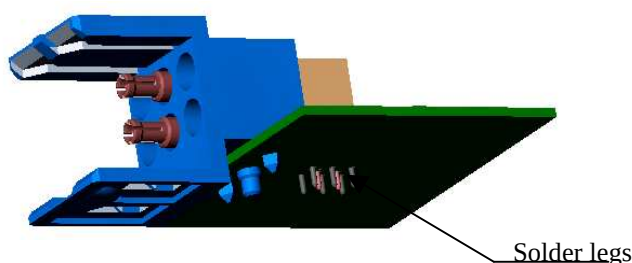

Radiall do not recommend to use more than 3 modules on the same motherboard and can't be held liable of any connection defect when more than 3 modules are implemented on the board

Issue : 0627 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.