

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


Part Number: [1730830008](#)
Status: **Active**
Overview: [KK 508 Connector System](#)
Description: KK 508 Header, Vertical, with Polarizing Backwall, Tin (Sn) Plating, Glow-Wire Capable, 8 Circuits

Documents:

3D Model	Packaging Specification PK-88596-1132-000 (PDF)
Drawing (PDF)	Test Summary TS-173083-0001-001 (PDF)
Product Specification PS-173083-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-173083-0001-001 (PDF)	

General

Product Family	PCB Headers
Series	173083
3D Viewer	Yes
Application	Power, Wire-to-Board
CURRENT-MAX-NUMERIC	7.0
Comments	This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options., This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.
Overview	KK 508 Connector System
PITCH-MATING-NUMERIC	5.08

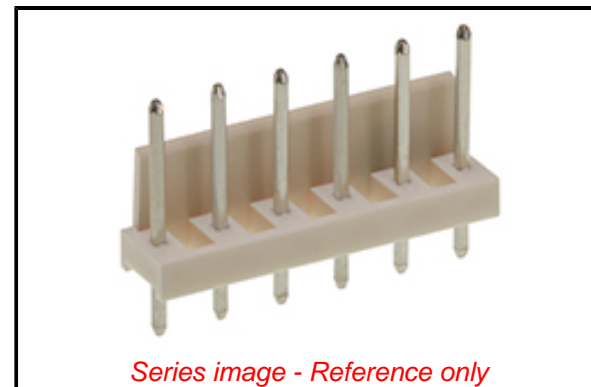

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[173083 Series](#)

Mates With

[KK Glow-Wire Capable Crimp Housing 91813](#)

Product Name KK 508
UPC 889056317283

Physical

Breakaway No
Circuits (Loaded) 8
Circuits (maximum) 8
Color - Resin Natural
Durability (mating cycles max) 25
First Mate / Last Break No
Glow-Wire Capable Yes
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 2.243/g
Number of Rows 1
Orientation Vertical
PC Tail Length 4.44mm
PCB Retention None
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 5.08mm
Pitch - Termination Interface 5.08mm
Plating min - Mating 2.500µm
Plating min - Termination 2.500µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Partial
Stackable Yes
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40° to +80°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A
Voltage - Maximum 250V

Solder Process Data

Lead-free Process Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-173083-0001-001
Packaging Specification PK-88596-1132-000
Product Specification PS-173083-0001-001
Sales Drawing SD-173083-0001-000
Symbol/Footprint Data SYM-173083-0008
Test Summary TS-173083-0001-001

This document was generated on 10/10/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.