


Connector 1

Connector 2

Article Properties:

| Properties | | Value | Unit |
|----------------------|---|-------|------|
| Nominal Cable Length | L | 304.8 | mm |
| | | | |
| | | | |
| | | | |

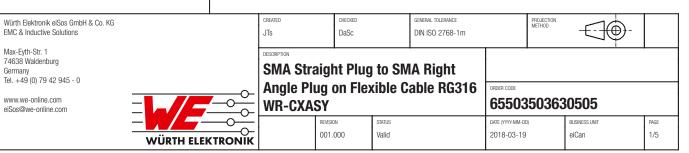

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

Material Properties Cable:

| Properties | Value Unit | | | | | |
|------------------------------|------------|----|--|--|--|--|
| Cable | RG-316/U | | | | | |
| Nominal Outer Cable Diameter | 2.49 | mm | | | | |

Material Properties Connector 1:

| • | |
|----------------------------------|--------------------------------|
| Insulator Material | PTFE |
| Insulator Color | White |
| Center Contact Material | Brass |
| Center Contact Plating | Gold, min. 0.76µm over Nickel |
| Body Material | Brass |
| Body Plating | Gold, min. 0.076µm over Nickel |
| Coupling Nut Material | Brass |
| Coupling Nut Plating | Gold, min. 0.076µm over Nickel |
| Retention Ring (C Ring) Material | Stainless Steel |
| Retention Ring (C Ring) Plating | Passivated |
| Gasket Material | Silicone |
| Gasket Color | Red |
| Ferrule Material | Brass |
| Ferrule Plating | Gold, min. 0.076µm over Nickel |
| Heat Shrink Tube Material | PE |
| Heat Shrink Tube Color | Black |

| Coupling Nut Material | Brass |
|----------------------------------|--------------------------------|
| Coupling Nut Plating | Gold, min. 0.076µm over Nickel |
| Retention Ring (C Ring) Material | Stainless Steel |
| Retention Ring (C Ring) Plating | Passivated |
| Gasket Material | Silicone |
| Gasket Color | Red |
| Ferrule Material | Brass |
| Ferrule Plating | Gold, min. 0.076µm over Nickel |
| Cover Material | Brass |
| Cover Plating | Gold, min. 0.076µm over Nickel |
| Heat Shrink Tube Material | PE |
| Heat Shrink Tube Color | Black |

Kind Properties:

| MIL-STD-348 |
|-------------|
| Flexible |
| Braid |
| SMA |
| Plug |
| Straight |
| SMA |
| Plug |
| Right Angle |
| |

General Information:

| Operating Temperature | -55 °C up to +165 °C | | | | |
|-----------------------|----------------------|--|--|--|--|
| Compliance | RoHS | | | | |

| Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions | CREATED JTS | CHECKED DaSc | | GENERAL TOLERANCE DIN ISO 2768-1m | | PROJECTION METHOD | | |
|--|----------------|---------------------|-----------------|--------------------------------------|--------------------------------|----------------------|------------------------|-------------|
| Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 | SMA Stra | | | A Right able RG316 | ORDER CODE | | | |
| aiCaa@wa aplina aam | WR-CXAS | - | | | 65503 | 50363 | 80505 | |
| = | | REVISION 001.000 | status Valid | | DATE (YYYY-MM-DD 2018-03-19 | , | BUSINESS UNIT eiCan | PAGE 2/5 |

Material Properties Connector 2:

| Insulator Material | PTFE |
|-------------------------|--------------------------------|
| Insulator Color | White |
| Center Contact Material | Brass |
| Center Contact Plating | Gold, min. 0.76µm over Nickel |
| Body Material | Brass |
| Body Plating | Gold, min. 0.076µm over Nickel |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektronik elSos GmbH & Co KG must be information network etc.. Worth Elektr

Electrical Properties:

| Properties | Test conditions | | Value | Unit | Tol. |
|--|-----------------------|------------------|----------|---------|------|
| Impedance | DC~6 GHz | Z | 50 | Ω | |
| Frequency Range | | f | DC~6 GHz | | |
| /SWR DC~6 GHz | | | 1.5 | | max. |
| Insertion Loss | DC~6 GHz | IL | 1.2 | dB | max. |
| Insulation Resistance 500 V (DC) in 120 sec. | | R _{ISO} | 5000 | MΩ | min. |
| Withstanding Voltage | 500 V (AC) in 60 sec. | | 750 | V (RMS) | min. |
| Working Voltage | | | 250 | V (RMS) | min. |


Mechanical Properties:

| | | | - |
|----------------------------------|-------|--------|------|
| Properties | Value | Unit | Tol. |
| Center Contact Retention (Axial) | 26.7 | Ν | min. |
| Mating Cycle | 500 | Cycles | |
| Coupling Nut Retention | 267 | Ν | min. |
| Recommended Mating Torque | 57 | Ncm | |
| Min. Bend Radius | 12.7 | mm | |
| Cable Retention | 44.5 | Ν | min. |

Packaging Properties:

| Properties | | Value |
|----------------|------|-------|
| Packaging | | Bag |
| Packaging Unit | Qty. | 10 |



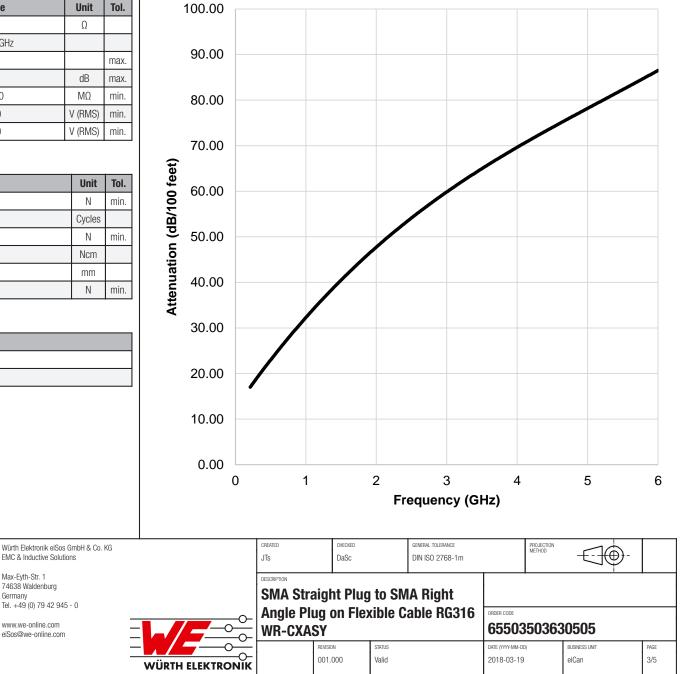

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivalent is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc.. Wurth Elektronik elSos GmbH & Co KG must be information intended to use is electronic component which is used in electrical circuits there adjust high standard is especially caused in the electronic component which is used in electrical circuits there are electrical circuits th

EMC & Inductive Solutions

Tel. +49 (0) 79 42 945 - 0

Max-Eyth-Str. 1

Germany

74638 Waldenburg

www.we-online.com

eiSos@we-online.com

Cautions and Warnings:

The following conditions apply to all goods within the product services of the Connectors of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and developed with the intention for use in general electronics equipment.
- Before incorporating the components into any equipment in the field such as military, aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.
- In addition, even electronic component in general electronic equipment, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed by the user before usage.
- The connector is designed and manufactured to be used within the datasheet specified values.
- Do not use the connector outside the datasheet specifications.
- Prevent any damage or scratches on the connector, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specification for standard products do also apply to customer specific products.
- Würth Elektronik products are qualified according to international standards which are listed into each product reliability report.All
 products characteristics are therefore given according to results obtained throughout these detailed test protocols. May any product
 characteristic be qualified by the customer, out of given Würth Elektronik specifications, Würth Elektronik cannot ensure its validity and
 sustainability over time.
- The Connectors are designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot insure the
 reliability of these components while being used with other products.

Product Specific:

Soldering:

- The solder profile must comply with the Würth Elektronik technical soldering specification, otherwise this will void the warranty.
- Other soldering methods are not verified and have to be validated by the customer at his own risk.

Cleaning and Washing:

- Parts are not constructed for washing, so washing can cause malfunction afterwards.
- Cleaning agent that are used to clean the customer applications might damage or change the characteristics of the component, body, pins and termination.

- · Please do not submerse our washable products into water or cleaning agents or put them in locations exposed to water completely.
- When cleaning by hand (brushing), please do not use excessive force on our connectors to avoid malfunction afterwards, because customer could deform function relevant areas.
- We recommended a solution without organic acid (preserve the plating against corrosion) volatile, without residues and compatible with the plastic.
- We recommend to perform tests and to let a part in immersion in the solution 8 to 12 hours and see if there is a degradation.

Storage Conditions:

 The Connectors are considered MSL1 into closed original packaging and are not subject to storage time limits regarding the moisture sensivity but all products shall be used before the end of the period of 12 months based on the products date code, if not 100% solderability can't be warranted.

Handling:

- Do not repeatedly operate the connector with excessive force. It may damage or deforms the contact dome which results in malfunction.
- In the case a product requires particular handling precautions, in addition to the general recommendations mentioned here before, these
 will appear on the product datasheet.

| Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions | CREATED JTS | CHECKED DaSc | | GENERAL TOLERANCE DIN ISO 2768-1m | | PROJECTION METHOD | | |
|--|--|-----------------|-----------------|--------------------------------------|--------------------------------|----------------------|------------------------|-------------|
| Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com | SMA Straight Plug to SMA Right Angle Plug on Flexible Cable RG316 WR-CXASY | | | | ORDER CODE 65503503630505 | | | |
| | | ISION 1.000 | status Valid | | DATE (YYYY-MM-DD 2018-03-19 |) | BUSINESS UNIT eiCan | PAGE 4/5 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential tracium signal, advantine, transportation (automotive control, train control, ship control), train control, ship control, train control, train control, train control, train control, ship control, train control, tra

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

| Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions | | CREATED JTS | CHECKED DaSc | | GENERAL TOLERANCE DIN ISO 2768-1m | | PROJECTION METHOD | | |
|--|--------------------------------|--|---------------------|-----------------|--------------------------------------|--------------------------------|----------------------|------------------------|-------------|
| Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 | SMA Straight Plug to SMA Right | | | | | - | | | |
| www.we-online.com eiSos@we-online.com | | Angle Plug on Flexible Cable RG316 WR-CXASY | | | | 0700FR code 655503503630505 | | | |
| | | | REVISION 001.000 | status Valid | | DATE (YYYY-MM-DE 2018-03-19 | , | BUSINESS UNIT eiCan | PAGE 5/5 |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential tracium signal, advantine, transportation (automotive control, train control, ship control), train control, ship control, train control, train control, train control, train control, ship control, train control, tra



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный) **Факс:** 8 (812) 320-02-42 **Электронная почта:** <u>org@eplast1.ru</u> **Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.