

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## FEATURES:

- High "Q", 3rd Overtone Crystal Technology
- Ultra Low Phase Noise -162 dBc/Hz Typ. @ 10kHz offset, 100MHz carrier
- Standard LVCMOS RF Output
- Wide Operating Temperature (-40°C to +85°C) standard
- ±28 ppm Max. All inclusive Stability (including Aging) over 10-years
- Available Frequency range from 50MHz to 156.25MHz
- 9.2 x 14.8mm RoHS Compliant SMT package

## APPLICATIONS:

- Satellite Modem Communication Systems
- COTS - Military communications
- Avionics
- Low Phase Noise Signal Sources
- High Definition TV
- Test & Measurement
- Ultra Low Jitter RF Communication Circuitry

## STANDARD SPECIFICATIONS

| Parameters                         |                     | Minimum   | Typical | Maximum | Units                | Notes                                     |
|------------------------------------|---------------------|---|---------|---------|----------------------|---|
| RF Output Frequency Range          |                     | 50.00   |         | 156.250 | MHz                  |   |
| Standard Available Frequencies     |                     | 50.00MHz, 80.00MHz, 81.92MHz, 92.16MHz, 96.00MHz, 98.304MHz, 100MHz, 104.00MHz, 106.25MHz, 120.00MHz, 122.88MHz, 125.00MHz, 150.00MHz, 155.52MHz & 156.250MHz |         |         |                      | Custom frequencies available upon request |
| Supply Voltage (Vdd)               |                     | 3.135   | 3.300   | 3.465   | Volts                |   |
| Current Drain                      | 50MHz ~ 99.999MHz   |   |         | 25.00   | mA                   |   |
|                                    | 100MHz ~ 149.999MHz |   |         | 35.00   |                      |   |
|                                    | ≥ 150.00MHz         |   |         | 40.00   |                      |   |
| Waveform                           |                     | LVCMOS  |         |         |                      |   |
| Output Load                        |                     |   |         | 15      | pF                   |   |
| V <sub>OH</sub>                    |                     | 0.9*Vdd   |         |         | Volts                |   |
| V <sub>OL</sub>                    |                     |   |         | 0.1*Vdd | Ω                    |   |
| Symmetry                           |                     | 45  | 50      | 55      | %                    |   |
| Rise & Fall Times                  |                     |   |         | 3.0     | ns                   |   |
| Operating Temperature Range        |                     | -40   |         | +85     | °C                   |   |
| Frequency Stability                |                     |   |         |         |                      |   |
| Over (-40° C to +85°C)             |                     |   | ±12.00  | ±18.00  | ppm                  | Relative to measured frequency @ 25°C     |
| ALL effects, including Aging       |                     |   |         | ±28.00  | ppm                  |   |
| Storage Temperature Range          |                     | -40   |         | +90     | °C                   |   |
| Aging                              | First Year          |   |         | ±2.00   | ppm                  |   |
|                                    | 5-Years             |   |         | ±5.00   | ppm                  |   |
|                                    | 10-Years            |   |         | ±7.00   | ppm                  |   |
| <b>Phase Noise (50MHz Carrier)</b> |                     |   |         |         |                      | Vdd=3.3V                                  |
| @ 10                               | Hz offset           |   | -90     | -82     | dBc/Hz               | <i>Note #1 &amp; #2</i>                   |
| @ 100                              | Hz offset           |   | -120    | -115    | dBc/Hz               |   |
| @ 1,000                            | Hz offset           |   | -145    | -140    | dBc/Hz               |   |
| @ 10,000                           | Hz offset           |   | -165    | -160    | dBc/Hz               |   |
| @ 100,000                          | Hz offset           |   | -166    | -165    | dBc/Hz               |   |
| @ 1,000,000                        | Hz offset           |   | -166    | -165    | dBc/Hz               |   |
| rms Jitter (12kHz ~ 20MHz BW)      |                     |   | < 100   | 125     | <i>Femto Seconds</i> | 0.125 ps Max.                             |



# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

| Parameters                             | Minimum | Typical  | Maximum | Units                | Notes                     |
|--|---------|----------|---------|----------------------|---------------------------|
| <b>Phase Noise (100MHz Carrier)</b>    |         |          |         |                      | Vdd=3.3V                  |
| @ 10 Hz offset                         |         | -88      | -82     | dBc/Hz               | <i>Note #1 &amp; #2</i>   |
| @ 100 Hz offset                        |         | -118     | -115    | dBc/Hz               |                           |
| @ 1,000 Hz offset                      |         | -141     | -138    | dBc/Hz               |                           |
| @ 10,000 Hz offset                     |         | -160     | -155    | dBc/Hz               |                           |
| @ 100,000 Hz offset                    |         | -161     | -160    | dBc/Hz               |                           |
| @ 1,000,000 Hz offset                  |         | -165     | -160    | dBc/Hz               |                           |
| rms Jitter (12kHz ~ 20MHz BW)          |         | < 50     | 100     | <i>Femto Seconds</i> | 0.10 ps Max.              |
| <b>Phase Noise (156.25MHz Carrier)</b> |         |          |         |                      |                           |
|  |         |          |         |                      | Vdd=3.3V                  |
| @ 10 Hz offset                         |         | -75      | -70     | dBc/Hz               | <i>Note #1 &amp; #2</i>   |
| @ 100 Hz offset                        |         | -110     | -105    | dBc/Hz               |                           |
| @ 1,000 Hz offset                      |         | -140     | -135    | dBc/Hz               |                           |
| @ 10,000 Hz offset                     |         | -155     | -150    | dBc/Hz               |                           |
| @ 100,000 Hz offset                    |         | -161     | -160    | dBc/Hz               |                           |
| @ 1,000,000 Hz offset                  |         | -165     | -160    | dBc/Hz               |                           |
| rms Jitter (12kHz ~ 20MHz BW)          |         | < 50     | 100     | <i>Femto Seconds</i> | 0.10 ps Max.              |
| <b>Electrical Frequency Adjustment</b> |         |          |         |                      |                           |
| Control Voltage Range (Vc)             | 0.0     | 1.65     | 3.30    | Volts                |                           |
| Frequency Pull Range                   | ±28.00  |          | ±55.00  | ppm                  | Referenced to the carrier |
| Frequency Pull Slope                   |         | Positive |         |                      |                           |
| Control Voltage Port Impedance         | 10      |          |         | kΩ                   |                           |
| Control Port Linearity                 |         |          | ±10     | %                    |                           |

**Note #1:** Maximum Phase Noise is verified on 100% of the parts at 25°C ± 3°C.

**Note #2:** The above specified Phase Noise & Jitter is with the oscillator device configured as a VCXO. In XO configuration, the Phase Noise will be slightly better at each offset between 10Hz and 10 kHz, by approximately -3dB to -5dB.

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## TYPICAL PHASE NOISE PERFORMANCE @ 50.00 MHz CARRIER

## TYPICAL PHASE NOISE PERFORMANCE @ 100.00 MHz CARRIER



## FREQUENCY PULL VERSUS CONTROL VOLTAGE (REFERENCED TO 100.000MHz)



## CURRENT DRAIN VERSUS CONTROL VOLTAGE @ VDD = +3.3V



ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 10.17.14**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## FREQUENCY STABILITY VS. TEMPERATURE @ VDD = +3.3V (REFERENCED TO MEASURED FREQUENCY @ 25°C)




## PART IDENTIFICATION:

ABLNO -    Frequency (MHz) -      

| Fixed Clock Vs. VCXO Option |                                |
|-----------------------------|--------------------------------|
| <b>Blank</b>                | Fixed Clock Oscillator         |
| <b>V</b>                    | VCXO ( $\pm 28$ ppm min. Pull) |


| Tape & Reel Options |                         |
|---------------------|-------------------------|
| Blank               | < 250 units on cut tape |
| T2                  | 250 units per reel      |
| T                   | 1,000 units per reel    |

## OUTLINE DIMENSIONS:

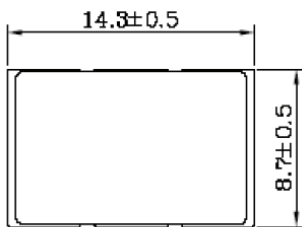

| Pin # | Functionality  |
|-------|--|
| 1     | Voltage Control (Vc) for VCXO<br>No Connect (N/C) for XO |
| 2     | Ground   |
| 3     | RF Output  |
| 4     | Vdd  |

## Recommended Land Pattern

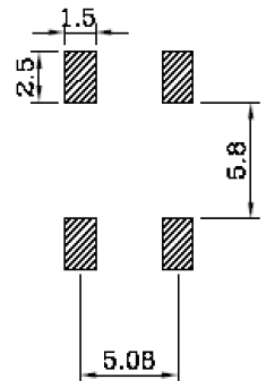

Dimensions: mm

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## REFLOW PROFILE:



## TAPE & REEL:

(1,000) units per reel standard, (250) units per reel available (option # T2)



**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 10.17.14**

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.