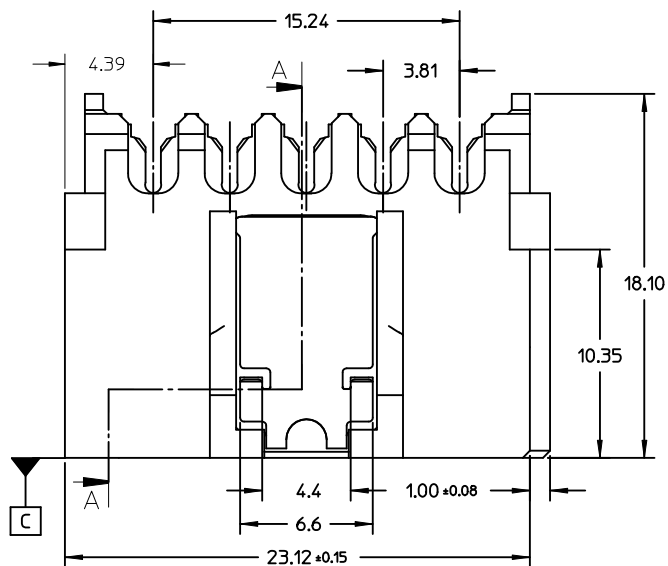


SECTION A-A

NOTES:

1. MATERIAL:

HOUSING: THERMAL PLASTIC, G.F., UL94V-0, COLOR: BLACK
COVER: THERMAL PLASTIC, COLOR: BLACK
TERMINAL: COPPER ALLOY
METAL LATCH: STAINLESS STEEL

2. TERMINAL PLATING:

CONTACT AREA: GOLD PLATED
IDT TAIL: PLATE TIN, 1.9 MICRONS MINIMUM
UNDER PLATE: PLATE NICKEL 1.25 MICRONS MINIMUM

3. PACKAGING: TRAY


4. PRODUCT SPECIFICATION REFER TO PS-67490-001

5. ASSEMBLY WITH COVER 679260040/0041 AFTER WIRE TERMINATION




6. MATING PART 87679

7. RECOMMENDED TERMINATING WIRE SIZE: SEE TABLE

8. PRODUCT COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC



WITH LATCH TYPE

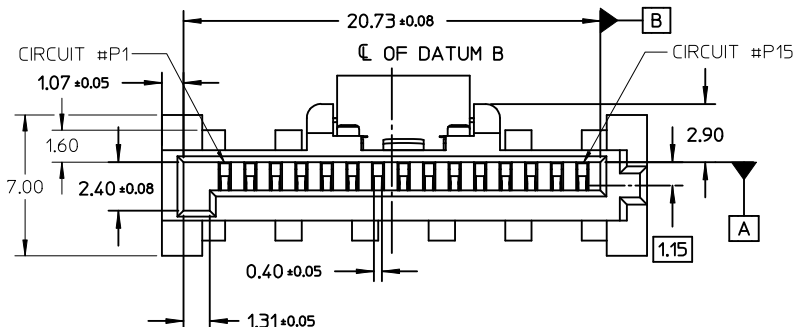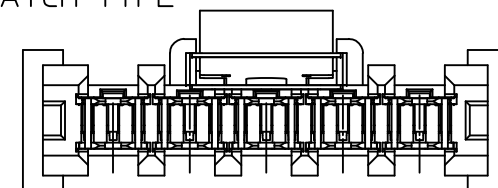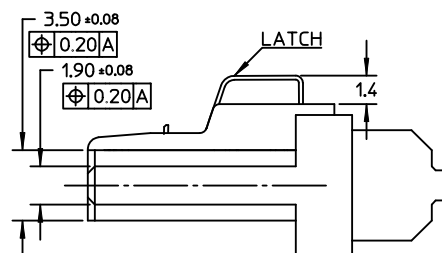

REMOVE PART NUMBER

EC NO: SH2012-0062
DRWN:XQZHANG 2012/01/18
CHKD:XQZHANG 2012/01/30
APPR:AYIN 2012/02/02

QUALITY SYMBOLS
F_A=0
F_G=0
F_P=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± 0.25	± 0.010
3 PLACES	± 0.25	± 0.010
2 PLACES	± 0.25	± 0.010
1 PLACE	± 0.30	± 0.012

ANGULAR ± 1°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
GRATE MA	2004/01/17
CHECKED BY	DATE
YAJUN	2004/01/17
APPROVED BY	DATE
SAM	2004/01/17

MATERIAL NO.
SEE SHEET 3

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
4:1	METRIC	

SERIAL ATA
POWER CONNECTOR
IDT TYPE

MOLEX INCORPORATED

DOCUMENT NO. SD-67926-001

SHEET NO. 1 OF 3

10 9 8 7 6 5 4 3 2 1

F



E

D


C

B

A

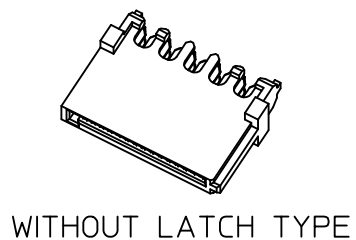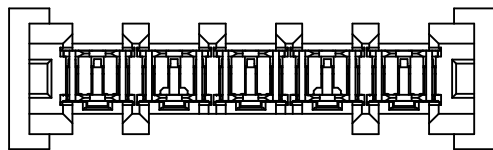


WITHOUT LATCH TYPE




Detail2


SCALE 20:1

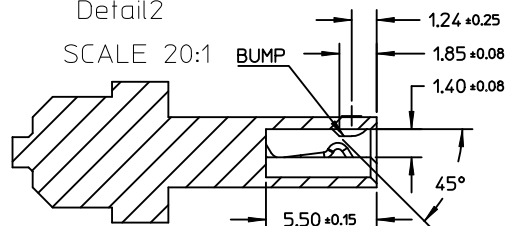

SECTION B-B

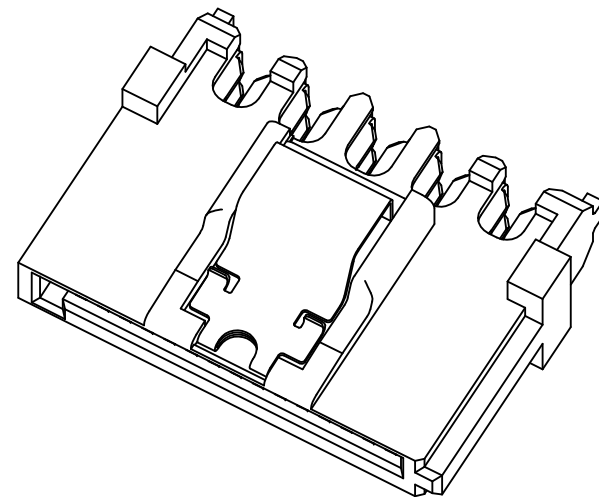

See Detail2

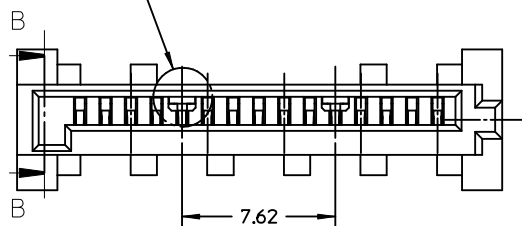

NOTES:
OTHER INFORMATION REFER TO SHEET 1

SEE SHEET 1 EC NO: SH2012-0062 DRAWN:XQZHANG CHKD:XQZHANG APPR:AYIN	DESCRIPTION	QUALITY SYMBOLS ▽_F=0 ▽_F=0 ▽_F=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY GRATE MA	DATE 2004/01/17	TITLE SERIAL ATA POWER CONNECTOR IDT TYPE				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± ---	YAJUN	2004/01/17	MOLEX INCORPORATED				
			2 PLACES	± 0.25	± ---	APPROVED BY	DATE					
			1 PLACE	± 0.30	± ---	SAM	2004/01/17	DOCUMENT NO. SD-67926-001				
ANGULAR ± 1 °		MATERIAL NO.		SHEET NO. 2 OF 3								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 3							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		SIZE A3										

9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

P/N	RECOMMENDED WIRE SIZE	PLATE TYPE	REMARK	
67926-0001	18AWG	GOLD FLASH	WITH LATCH, WITHOUT BUMP	
67926-0401	22AWG			
67926-0002	18AWG	0.76 MICRON GOLD PLATED		
67926-0302	20AWG			
67926-0402	22AWG			
67926-0005	18AWG	0.38 MICRON GOLD PLATED		
67926-0305	20AWG			
67926-0405	22AWG			
67926-0021	18AWG	GOLD FLASH	WITH LATCH, WITH BUMP	
67926-0321	20AWG			
67926-0421	22AWG			
67926-0022	18AWG	0.76 MICRON GOLD PLATED		
67926-0322	20AWG			
67926-0422	22AWG			
67926-0025	18AWG	0.38 MICRON GOLD PLATED		
67926-0425	22AWG			
67926-0011	18AWG	GOLD FLASH	WITHOUT LATCH,WITH BUMP	
67926-0311	20AWG			
67926-0411	22AWG			
67926-0012	18AWG	0.76 MICRON GOLD PLATED		
67926-0412	22AWG			
67926-0015	18AWG	0.38 MICRON GOLD PLATED		
67926-0315	20AWG			
67926-0415	22AWG			

SEE SHEET 1

EC NO: SH2012-0062

DRWN:XQZHANG 2012/01/18

CHKD:XQZHANG 2012/01/30

APPR:AYIN 2012/02/02

REV

DESCRIPTION

QUALITY SYMBOLS

$F_A=0$

$F_C=0$

$F_P=0$

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.30	± ---

ANGULAR ± 1 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM ONLY

DRAWN BY	DATE
GRATE MA	2004/01/17
CHECKED BY	DATE
YAJUN	2004/01/17
APPROVED BY	DATE
SAM	2004/01/17

MATERIAL NO.

SEE TABLE

SIZE

A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

4:1

DESIGN UNITS

METRIC

 THIRD ANGLE PROJECTION

TITLE

SERIAL ATA POWER CONNECTOR IDT TYPE

 MOLEX INCORPORATED

DOCUMENT NO.

SD-67926-001

SHEET NO.

3 OF 3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.