


Supercapacitors A Series

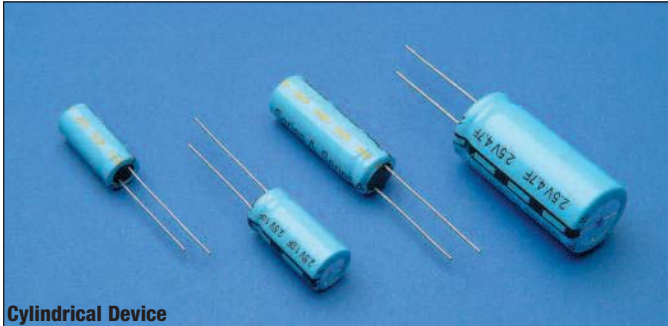

Cylindrical Device

Description

Cooper Bussmann[®] PowerStor[®] supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Cooper Bussmann to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for milliseconds.



Features & Benefits

- Very low ESR
- Low leakage current
- Long cycle life
- High useable capacity
- Very high specific capacitance also available (B Series)

Applications

- Pulse power
- Hold-up power
- DC/DC converters
- Hybrid battery packs
- Valve / solenoid actuation

Specifications

Working Voltage	2.5V
Surge Voltage	3.0V
Nominal Capacitance Range	0.47 to 4.7F
Capacitance Tolerance	-20% to +80% (20°C)
Operating Temperature Range	-25°C to 70°C


Standard Products

Nominal Capacitance (F)	Part Number	Nominal ESR (Ω) (Equivalent Series Resistance) Measured @ 1kHz	Nominal Dimensions (mm)		Typical Mass (grams/1 piece)
			Diameter	Length	
0.47	A0820-2R5474-R	0.150	8	20	1.8
1.0	A1020-2R5105-R	0.090	10	20.5	2.6
1.5	A1030-2R5155-R	0.060	10	30	3.8
4.7	A1635-2R5475-R	0.025	16	35	10.7

Performance

Parameter	Capacitance Change (% of initial measured value)	ESR (% of initial specified value)
Life (1000 hrs @ 70°C @ 2.5Vdc)	≤ 30	≤ 300
Storage - Low and High Temperature (1000 hrs @ -25°C and 70°C)	≤ 30	≤ 300

Dimensions (mm)									
Part Number	D	D'	L	L'	F	d'	C	E	
A0820-2R5474-R	8.0	8.5	20.5	21.0	3.5	0.50	20.0	25.0	
A1020-2R5105-R	10.0	10.5	21.8	22.3	5.0	0.60	20.0	25.0	
A1030-2R5155-R	10.0	10.5	31.0	31.5	5.0	0.60	20.0	25.0	
A1635-2R5475-R	16.0	16.5	37.5	38.0	7.5	0.80	20.0	25.0	
Tolerances	Maximum				± 0.5	± 0.02	Minimum		

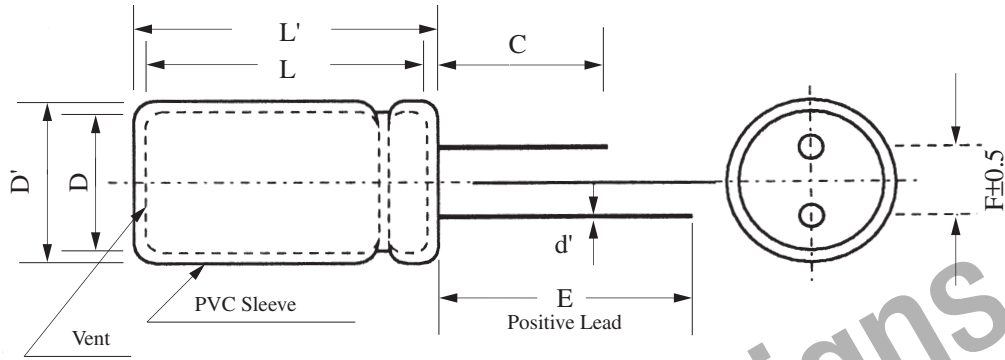

Part Numbering System											
A	□	□	□	□	-	2	R	5	□	□	□
Series Code	Dimensions (mm)					Voltage (V) R is decimal		Capacitance (µF)			
B = Very Low ESR	Diameter		Length			2R5 = 2.5V		Value	Multiplier		
								Example: 475 = 47 x 10 ⁵ µF or 4.7F			

Packaging Information

Standard packaging: Bulk, 100 units per package.
Special packaging available upon request. Contact factory.

Part Marking

Manufacturer
Capacitance (F)
Max. Operating Voltage (V)
Series Code (or part number)
Polarity Marking

North America

Cooper Bussmann
1225 Broken Sound Parkway NW
Suite F
Boca Raton, FL 33487-3533
Tel: 1-561-998-4100
Fax: 1-561-241-6640
Toll Free: 1-888-414-2645

Cooper Bussmann
P.O. Box 14460
St. Louis, MO 63178-4460
Tel: 1-636-394-2877
Fax: 1-636-527-1607

Europe

Cooper Bussmann
Cooper (UK) Limited
Burton-on-the-Wolds
Leicestershire • LE12 5TH UK
Tel: +44 (0) 1509 882 737
Fax: +44 (0) 1509 882 786

Cooper Bussmann
Avda. Santa Eulalia, 290
08223
Terrassa, (Barcelona), Spain
Tel: +34 937 362 812
+34 937 362 813
Fax: +34 937 362 719

Asia Pacific

Cooper Bussmann
1 Jalan Kilang Timor
#06-01 Pacific Tech Centre
Singapore 159303
Tel: +65 278 6151
Fax: +65 270 4160

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2007 Cooper Bussmann
St. Louis, MO 63178
www.cooperbussmann.com





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.