

## Description

Single, two and three pole magnetic and hydraulic-magnetic circuit breakers with trip-free mechanism and toggle actuation. A choice of fast magnetic only or hydraulically delayed switching characteristics (S-type MO or HM CBE to EN 60934) ensures suitability for a wide range of applications. Featuring a combi-foot design for symmetric rail mounting. Low temperature sensitivity at rated load. Approved to CBE standard EN 60934 (IEC 60934).

## Typical applications

Power supplies, control equipment, communication systems, EDP systems.



**8340-T...**

single pole

three pole

## Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance values ( $\Omega$ ) per pole			
	F1	F2	K1, M1, T1	K2, M2, T2
0,02	1 493	953	2 669	2 457
0,05	276	152	452	376
0,1	58	37	100	94
0,25	8,2	6,0	15,5	14,7
0,5	2,3	1,47	3,9	3,2
0,75	0,98	0,63	1,65	1,56
1	0,58	0,35	0,95	0,90
2	0,145	0,096	0,26	0,20
2,5	0,096	0,061	0,15	0,15
3	0,065	0,048	0,10	0,10
5	0,025	< 0,02	0,042	0,040
6	< 0,02	< 0,02	0,029	0,028
8	< 0,02	< 0,02	< 0,02	< 0,02
10	< 0,02	< 0,02	< 0,02	< 0,02
12	< 0,02	< 0,02	< 0,02	< 0,02
15	< 0,02	< 0,02	< 0,02	< 0,02
16	< 0,02	< 0,02	< 0,02	< 0,02
20	< 0,02	< 0,02	< 0,02	< 0,02
25	< 0,02	< 0,02	< 0,02	< 0,02
30	< 0,02	< 0,02	< 0,02	< 0,02
40	< 0,01	-	< 0,01	-
50	< 0,01	-	< 0,01	-

## Technical data

For further details please see: [http://www.e-t-a.de/ti\\_e](http://www.e-t-a.de/ti_e)

Voltage rating	3 AC 415V; AC 240V (50/60Hz); DC 80V (higher DC voltages to special order)			
Current rating range	0,02...50 A DC 0,02...30 A AC			
Auxiliary circuit	1 A, AC 240 V/DC 65 V; 0,5 A DC 80 V			
Typical life	3 AC 415 V AC 240 V: 0,02...30 A 6,000 operations at $1 \times I_N$ , inductive 10,000 operations at $1 \times I_N$ , resistive WDC 80 V: 0,02...25 A 6,000 operations at $1 \times I_N$ , inductive 0,02...30 A 10,000 operations at $1 \times I_N$ , resistive 40 + 50 A 6,000 operations at $1 \times I_N$ , resistive			
Ambient temperature	-40...+85 °C (-40...+185 °F)			
Insulation co-ordination (IEC 60664 and 60664A)	rated impulse withstand voltage	pollution degree		
	2,5 kV	2	reinforced insulation in operating area	
Dielectric strength (IEC 60664 and 60664A)	operating area test voltage AC 3,000 V Line to Load test voltage AC 1,500 V pole to pole (2- and 3-pole) test voltage AC 1,500 V main to auxiliary circuit test voltage AC 1,500 V			
Insulation resistance	> 100 M $\Omega$ (DC 500 V)			
Interrupting capacity IEC 60934 - test sequence E4 x IN at DC	6 x IN at AC; E4 x IN at DC			
Interrupting capacity (UL 1077)	I <sub>N</sub> AC: 1-pole 2-pole 3-pole	0,02...20 A AC 250 V/3,500A AC 250 V/3,500A 3AC 250V/3,500A	25...30 A AC 250 V/3,500A AC 250 V/5,000A 3AC 250V/5,000A	
	DC:	1-pole 2-pole	0,02...50 A 0,02...30 A	DC 80 V/3,500 A DC 80 V/3500 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP40 terminal area IP20			
Vibration	with toggle down: directions 1, 2, 3, 4, 5: with curves F1, F2: 10 g at 0,9 I <sub>N</sub> 10 g at 1 x I <sub>N</sub> 10 g at 0,8 x I <sub>N</sub> in all planes. (57-2000 Hz) ± 0,76 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis			
Shock	directions 1, 2, 3, 4, 5: direction 6: with curves F1, F2: 100 g (11 ms) at 1 x I <sub>N</sub> 100 g (11 ms) at 0,8 x I <sub>N</sub> 100 g (11 ms) at 0,8 x I <sub>N</sub> to IEC 60068-2-27, test Ea			
Corrosion	96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka			
Humidity	240 hours at 95 % RH, to IEC 60068-2-78, test Cab			
Mass	approx. 98 g per pole			

## Ordering information

Type No.	8340 circuit breaker with toggle actuator		
Mounting	<b>T</b> rail mounting		
Configuration	<b>1</b> snap-on installation <b>Number of poles</b> 1 single pole protected 2 two pole protected 3 three pole protected		
	} magnetic, hydraulic-magnetic		
Panel hardware	<b>0</b> without panel hardware		
Terminal design (main contact)	K1 recessed screw/pressure plates M4		
Characteristic curve *)			
Characteristic curve, instantaneous:			
<b>F1</b> DC			
<b>F2</b> AC 50/60 Hz			
Short delay:			
<b>K1</b> DC			
<b>K2</b> AC 50/60 Hz			
Medium delay:			
<b>M1</b> DC			
<b>M2</b> AC 50/60 Hz			
Long delay:			
<b>T1</b> DC			
<b>T2</b> AC 50/60 Hz			
Actuator colour / design			
<b>A</b> black, long toggle			
<b>K</b> black, short toggle			
Marking on actuator			
<b>O</b> without marking			
<b>L</b> I-O; ON-OFF			
<b>M</b> I-O; ON-OFF ( $I_N$ , $U_N$ , trip curve, schematic diagram on housing top)			
<b>N</b> I-O; ON-OFF ( $I_N$ , on housing top)			
Auxiliary contacts			
<b>H0</b> without auxiliary contacts			
<b>H1</b> with auxiliary contact			
<b>H2</b> with auxiliary contact on one pole only (multipole)			
Auxiliary contact function (see internal connection diagrams)			
<b>2</b> 1 N/O contact			
<b>3</b> 1 N/C contact			
Auxiliary contact terminal design			
<b>6</b> screw/pressure plate M3			
Current ratings			
<b>0.02...50 A</b>			

8340 - T 1 1 0 - K1 M1 - A L H1 2 6 - 10 A ordering example

This is a metric design and millimeter dimensions take precedence (mm/inch)

\*) Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads)



Please be informed that we have minimum ordering quantities to be observed.

## Approvals


Authority	Standard	Rated voltage	Current ratings
VDE	IEC / EN 60934	AC 240/415 V AC 240 V DC 80 V	0.02 A...30 A 0.02 A...30 A 0.02 A...50 A
UL	UL 1077	AC 250 V DC 80 V DC 80 V	0.02 A...30 A 0.02 A...50 A 100 A (2 poles in parallel)
UL	UL 489A	DC 80 V	0.05 A...30 A (1 + 2 pole)
CSA	C22.2 No 235	AC 250 V DC 80 V	0.02 A...30 A 0.02 A...30 A
CQC	GB 17701	AC 240/415 V AC 240 V DC 80 V	0.02 A...30 A 0.02 A...30 A 0.02 A...50 A
QPL Sweden Defence Material Admin.	MIL-C-55629	AC 240 V DC 50 V AC 240 V AC 240 / 415 V	1 A...30 A (8340-F410) 1 A...30 A (8340-410) 1 A...30 A (8340-F420) 1 A...30 A (8340-F430)

## Dimensions

### long toggle

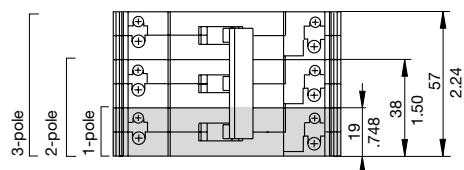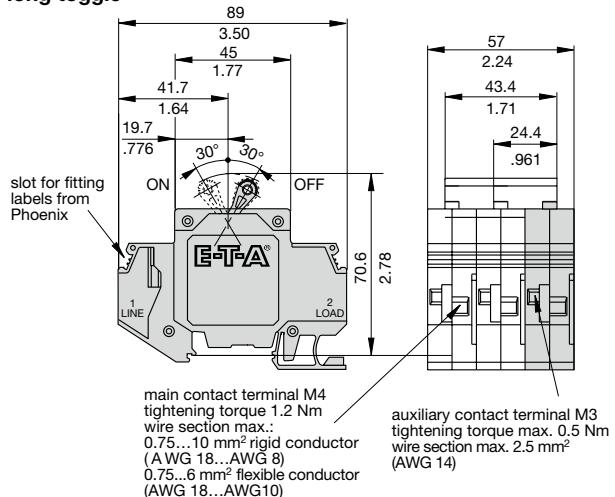


### short toggle

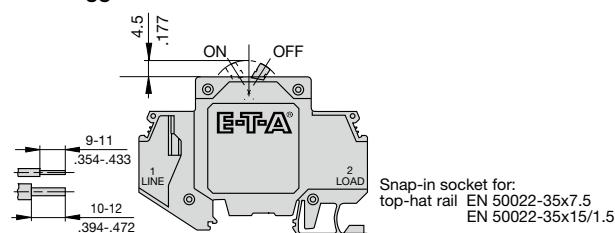


## Internal connection diagrams


### 1-pole protected magnetically



### 1-pole protected hydraulic-magnetically




### multipole

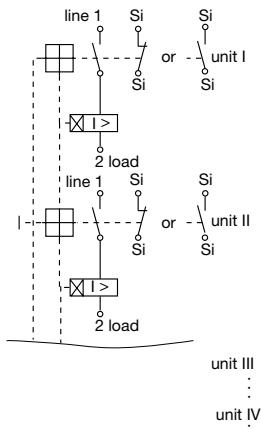


Optional N/C or N/O auxiliary contact (Si)

## Shock directions

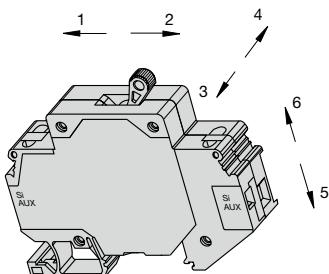


## Installation drawing

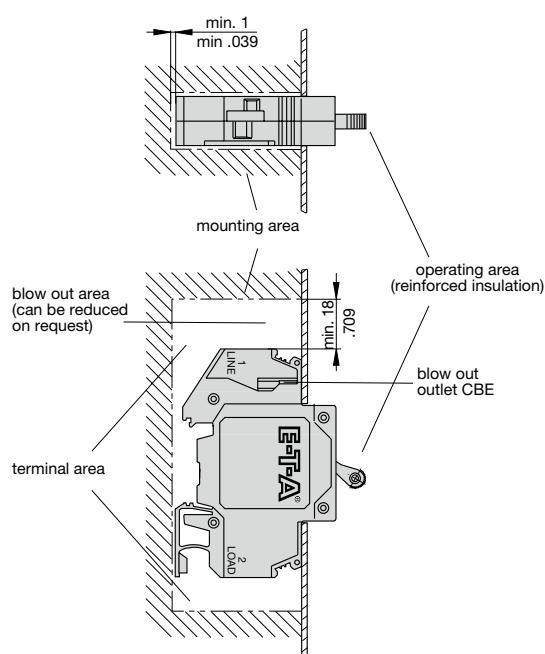


Typical time/current characteristics at 23 °C / +73.4 °F


**Curve F1 (instantaneous) for DC**

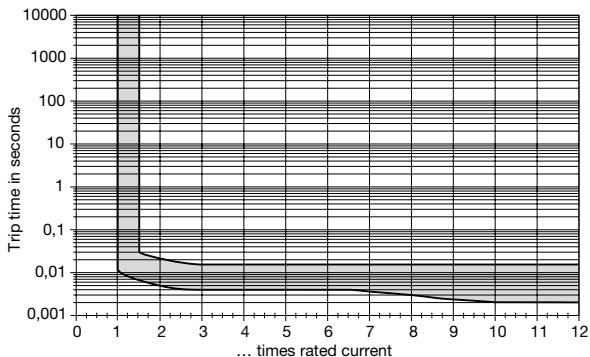


**Curve F2 (instantaneous) for AC**

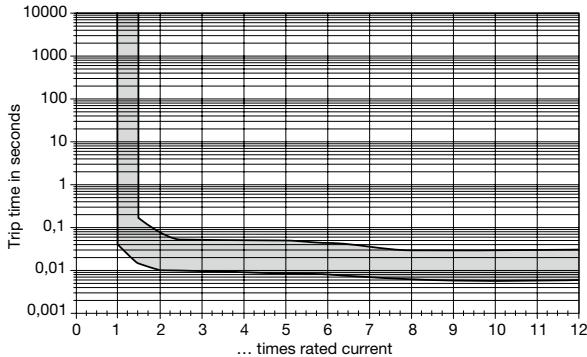


**Curve K1 (short delay) for DC**

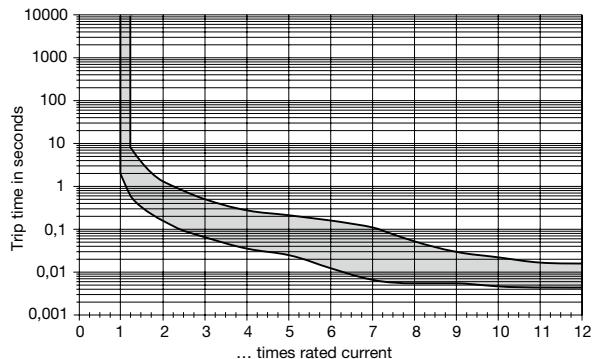


**Curve K2 (short delay) for AC 50/60 Hz**

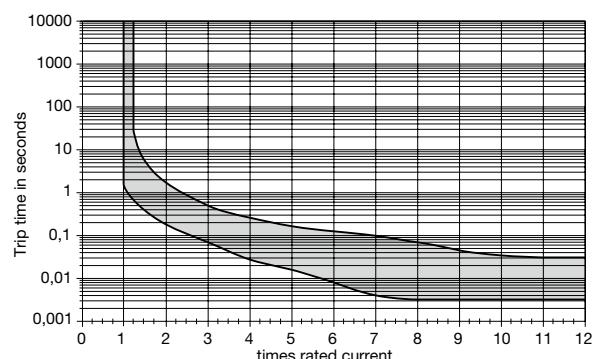


**Curve M1 (medium delay) for DC**

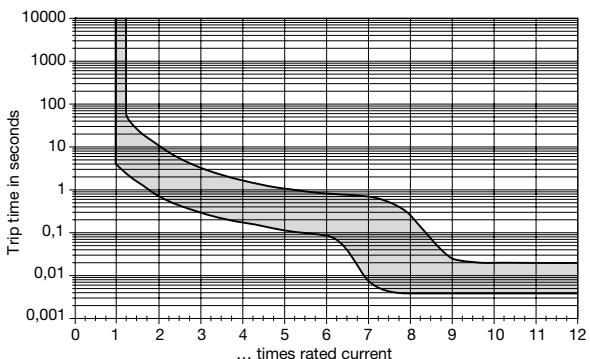


**Curve M2 (medium delay) for AC 50/60 Hz**

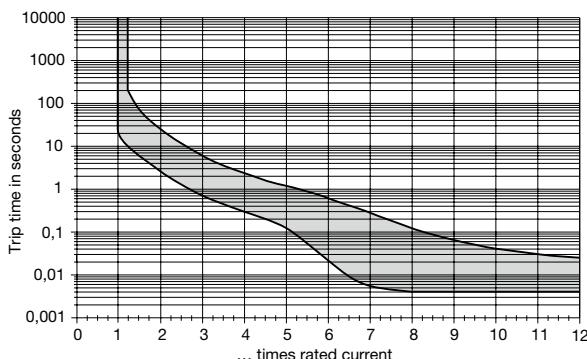

**Curve T1 (long delay) for DC**

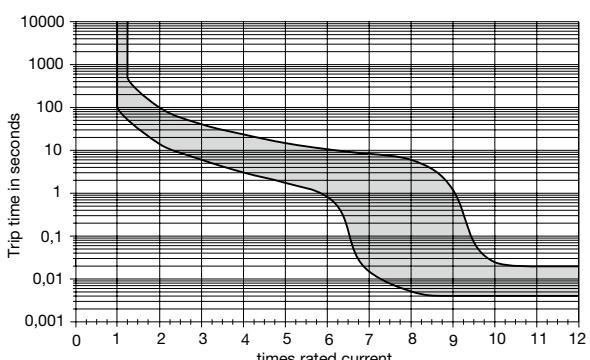

**Curve T2 (long delay) for AC 50/60 Hz**

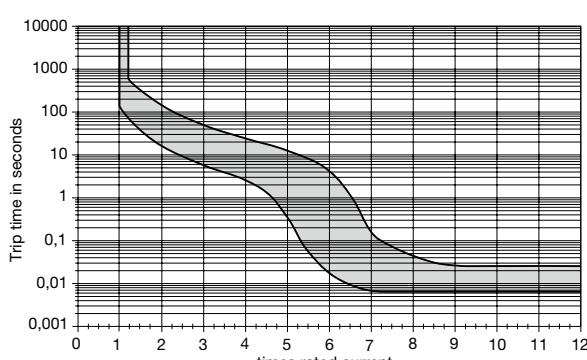

**N.B.** All curves will only be maintained if the escutcheon is mounted on a vertical surface.

Ambient temperature or mounting side-by-side does not influence the trip curve, derating is not required.


The breakers may trip in the event of current peaks < 0.003 sec. For these applications we offer a mechanical pulse delay – please enquire.

**Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads).**

## Accessories

### Connector bus links -K10


X210 589 01/2.5 mm<sup>2</sup>, (AWG 14) (black) up to 20 A max. load  
 X210 589 02/1.5 mm<sup>2</sup>, (AWG 16) (brown) up to 13 A max. load

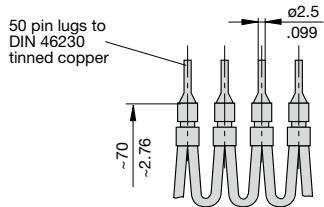

### Busbar 1-pole Y 308 495 01

The one metre long busbars can be cut to suitable lengths.  
 Plug-on caps can be fitted on the ends to provide brush contact protection.

I<sub>max</sub> - busbar 100 A (40 °C)

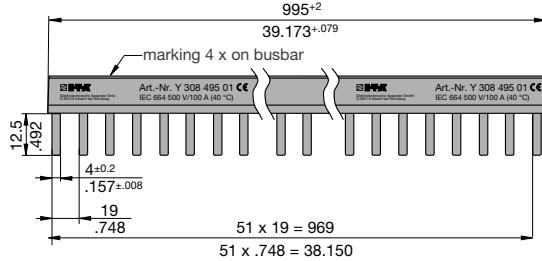


### Plug-on cap, 1-pole Y 307 851 01



### Busbar 2-pole

### Y 308 496 01

I<sub>max</sub> - busbar 100 A (40 °C)

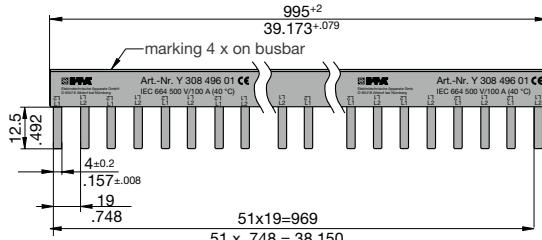


### Plug-on cap, busbar 2/3-pole Y 308 506 01




### Busbar 3-pole

### Y 308 497 01

I<sub>max</sub> - busbar 100 A (40 °C)

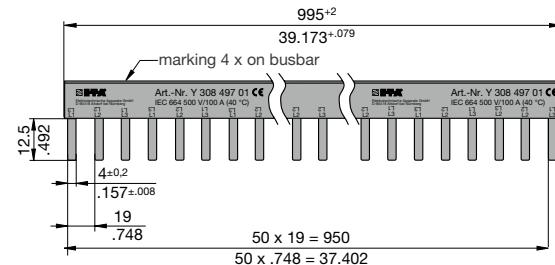


### Plug-on cap, busbar 2/3-pole Y 308 506 01



### Supply terminal I<sub>max</sub> 63 A Y 308 504 01

Max. tightening torque of terminal screw 2 Nm  
 Max. cable cross section: 25 mm<sup>2</sup> / single strand  
 16 mm<sup>2</sup> / multistrand  
 with wire end ferrule



### Caution:

When using multipole busbars please leave at least one pole's width between two adjacent line entry terminals.

This is a metric design and millimeter dimensions take precedence ( $\frac{\text{mm}}{\text{inch}}$ )

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.